

PRODUCT CATALOG 2022 | 2023

AA

EQUIPMENT FOR TEST AND DIESEL REPAIR FUEL EQUIPMENT

Test benches, specialized tools, repair complexes, equipment, electronic devices for CR, UIS, UPS, injection pump systems



www.dieselland.biz | www.dieselland.eu dieselland@mail.ru | info@dieselland.ru

18.10.22



DIESELLAND COMPANY

Dieselland specializes in the production of diagnostic, testing and repair equipment for various diesel fuel equipment, installed both in passenger cars and trucks, as well as on agricultural and special equipment.

The company develops and manufactures test equipment for diesel fuel systems such as: Common rail (CDI, HDI ...); pump injectors (UIS, UPS), including systems of such manufacturers as: Bosch, Delphi, Denso, Siemens, Cummins, Detroit, Catterpillar; classic fuel systems for in-line and rotary injection pumps (PE, VE, VR, VP) BOSCH.

In addition to the production of equipment and tools for the repair of diesel fuel equipment, we design and manufacture precision mechanics products and welding structures as per customer's drawings, so with the development of all design



CONTENT

1

Stands and equipment for testing common rail injectors and pumps

TRIUMF – test bench for testing 1-4 CR injectors	
CRUIS – Test bench for testing CR injectors	23
CR-Test 4E – test bench for testing pumps and 1-4 CR injectors	
CR-Test-2P – Stand for testing high pressure fuel pumps Common Rail system	57
Additional equipment and accessories for stands	
Modernization kit for CR-Jet-4E stands.	70
PUMP TEST.02 – common-Rail High Pressure Pump Testing Equipment	71
CR TESTER . CRT-5040 – a device for testing 1-4 CR injectors	72
FLAGMAN-FLOW – 8-channel injector dosage measuring unit	73
FLAGMAN-FULL – equipment for testing 1-4 CR injectors without coding	73
FLAGMAN-CODE – equipment for testing 1-4 CR injectors with coding	
FLAGMAN-CODE-L – equipment for testing 1-4 CR injectors with coding	75
Spare parts for measuring system	76
CR-Active – injector signal activator CR	77
CR-NeXT – Armature activator device for Common Rail injector solenoid valve	77
MONICA – Common Rail injector electromagnet actuation current measuring device	77
PTC-2520 CP TESTER – injection pump tester CR	
FMDE-520 – instrument for checking the performance of injection pump CR	77
CRistina-PIEZO – PIEZO injector tester CR	
CRISTINA – complex for assembly and adjustment of CR injectors	
PR-TESTER.V05 – electronic pressure gauge 2-channel	79
Basic kits for testing CR injectors	81
Sets of flasks and adapters for backflow of CR injectors	87
Backflow fitting kits for CR injectors	88
Universal adapter for truck injectors CR DL-CR50013	94
Adapter for cargo injectors CR Denso to connect the supply and backflow	
Truck injector test adapters	
Equipment for testing pumps and nozzles	105
Retrofit kit for 2400 bar CR-Jet stands	133

2

Equipment and tools for repairing common rail injectors

CRISTINA – complex for assembly and adjustment of CR injectors	.134
CRISTINA «BASE» set	.135
CRISTINA «BASE-F» set	.136
CRISTINA «FULL» set	.137



CRISTINA «PROF» set	138
CRISTINA «PROF FULL» set	140
CRISTINA «SPECIAL» set	142
Table stand for tripod CR-CRistina	145
Open-end spanner set	145
Pneumatic press	146
CR injector repair kits	147
Set of probes and adapters	149
Set of goniometers to control the tightening of the atomizer nut	150
Clamp for dismantling and assembling CR injectors	151
Adapter kits with digital indicators for measuring mounting clearances and stroke of the spray gun a	and
valve	155
CRistina-PIEZO – PIEZO injector tester CR	159
CR Siemens VDO injector repair kits	160
Hand presses	173
MP-250 SASH – CR injector multiplier valve seat restoration machine	175
Lapping	176
Diamond pastes, lapping plates, a set of washer holders for grinding them	179
Том-2 – Grinding machine for dressing of the laps	180
Том-5 – Grinding machine for dressing of the laps and other bodies of revolution	182
BOSCH PIEZO injector recovery kit	184
DL-GR7500 – Grinding machine for the needles of nozzles	187
DL-GR7400 – Grinding machine for nozzle needles with rotation speed indicators in percent	188
DL-GR7300 – Grinding machine for the needles of nozzles with speed indicators	189
Sets with an industrial microscope, an extended stand, a backlight and a monitor	190
Abrasive stones for GR machines	196
Diamond pencils, stone holder, stone balancing axis	198
Balancing fixture, stone remover, drive pulley kit	199
Additional equipment and accessories for grinding machines	200
GM-08 – surface grinder with lower movable work table	203
MGM-500 – sliding column surface grinder	205
Universal clamping tools for CR and CR Denso injectors	206
Nozzle holder blocks CR for vise	207
Wrenches for disassembling / assembling injectors	208
Bit wrenches for mounting / dismounting the nozzle nut of CR injectors	210
Nozzle wrenches for mounting / dismantling the collar nut of the CR injector injectors	211
Nozzle wrenches for mounting / dismounting the atomizer nut for BOSCH, VDO (Siemens) and BO	SCH
series 111 piezo injectors	212
Nozzle wrenches for mounting / dismantling the nut of the spray nozzle CR BOSCH, VDO	213
(Siemens), DENSO, DELPHI all types	213
Hexagonal wrenches with a square hole for a torque handle	215
Keys for disassembly / assembly of the CR SCANIA injector	216
Nozzle wrenches for mounting / dismantling the nut of the Delphi Smart Ø20.9mm, Bosch Ø25.8mr	n
injector nozzles. Tools for installing / removing the CRIN injector valve	217



CR injector support ring removal and installation kit	.218
Set of tools for installing the paronite ring of CRIN injectors	.218
DENSO CR injector filter removal and installation kit	.219
Sets of cutters for cleaning the seats of the engine injectors Delphi, Bosch	.220
Torque wrenches, adapters	221
Pullers for extracting CR injectors	.222
Kits for measuring compression in diesel engines	.224
Set for measuring fuel pressure in the low pressure line in diesel and gasoline engines	.224
Mechanical measuring heads	225
Indicator measuring heads	226
Racks magnetic for installation of an indicator measuring head	.231
Digital caliper. Digital micrometer.	.232

3

Auxiliary equipment and tools for checking and repairing dta

Special table-workbench CR-NEXT-ST01	
Bathtubs are corrosion-proof. ultrasonic baths. Small Parts Cleaning Container	
A set of anti-magnetic tweezers. High magnification lens. microscopes	234
Sets with industrial microscope, tripod, illumination and monitor	
Штативы-держатели для микроскопа	243
Control rack for test benches for injectors and injection pumps	244
Endoscope camera	244
Hand presses	245

4

Equipment and tools for testing and repairing common rail pumps

PUMP TEST.02 – equipment for testing injection pump CR	247
FMDE-520 – CR injection pump performance tester	248
PTC-2520 CP TESTER - a device for testing high pressure fuel pumps CR	248
ST-03 – universal cradle for CR pumps	249
Flanges for injection pump CR	250
Couplings for injection pump CR	253
A set of supports for installation on the stand of Denso HP0 pumps.	. 256
Equipment for repair of injection pump CR CP4 Bosch	256
Set of clamps for assembly of injection pump CP3	256
Adapters for pressure measurement in injection pump CR CP-3	257
Adapter kit for measuring the pressure of the booster pump CR	257
Set of fittings with lock for pump test CP1	257
Additional equipment for adapter DL-CR31497	258
Fittings for connecting high-pressure fuel pumps. Liquid filters	259



5

Stands and equipment for testing unit injectors (UIS) and pump sections (UPS)

DORPAT Multi-Cam11 – stand for testing unit injectors, pump sections	.260
Дополнительное оснащение для DORPAT Multi-Cam11	.267
CAM-BOX1 FORCE – basic kit for testing unit injectors and single pumps (UI / UP SYSTEM)	274
Additional equipment for CAM-BOX 1	.277
CAM-BOX 2 MASTER – test kit for unit injectors and single pumps	279
Additional equipment for CAM-BOX 2	.282
CAMBAT-FLOW - injection meter of pump-injectors of pumping sections of the UIS/UPS system (for	
UIS-Tester MULTICAM)	290
CAMBAT-FULL-SET – equipment for testing and checking the unit injector of pump sections of the L	JIS /
UPS system with a mechanical part	.292

6

Equipment and tools for the repair of unit injectors (UIS) and pump sections (UPS)

DL-ST02 – clamp for dismantling and assembling the unit injector of CR injectors	293
Keys for positioning the electromagnet in unit injectors	297
Keys for mounting / dismantling the nut of the electromagnet of the pump injector valve	
Keys for mounting / dismantling the spray nut of the unit injectors	
Caterpillar injector holder adapter	300
Kit for measuring the stroke of the unit injector valve	
Stand adapter for indicator	<u>3</u> 01
Комплект ключей для разборки-сборки насос-форсунок AUDI / VW	302
Tool kit for disassembly-assembly NF Audi / VW Siemens VDO	
Tool kit for disassembly-assembly NF AUDI / VW 1.9 PDE-P1.5	
Tool kit for disassembly-assembly NF AUDI / VW 2.0	305
Adapters for testing the injector part of unit injectors	
Adapters for CATERPILLAR	
Adapter kits for testing the injector part	311
Hand presses	
A set of diamond laps and reamers for restoring the valve seat	
BOSCH injector pump	<u>3</u> 14
Injector pump valve for VOLVO, SCANIA, IVECO	
Sets of diamond laps and reamers	315

Equipment and tools for testing and repairing heui unit injectors

Equipment and tools for checking and repairing HEUI unit injectors	.316
Adapter for testing the injector part of HEUI unit injectors	.317
O-ring installation kit for HEUI unit injectors	.317
Wrench for unscrewing the nut of the HEUI unit injector sprayer.	.317





Stands for testing fuel pumps high pressure injection pump

SPF-708, SPF-712, SPF-1108, SPF-1112 - assay stands for injection pumps	318
РТВ-3, РТВ-5, РТВ-7, РТВ-9, РТВ-12 –	.320
high-power assay stands for high-pressure fuel pumps	320
PTB14 – assay stand with a capacity of 45 kW for injection pump	.321
Additional equipment and accessories for stands for testing high-pressure fuel pumps	.323



Equipment and tools for repair of high pressure fuel pumps

Compensation clutches. Couplings are flanged. Couplings are conical. Spline couplings	. 325
Equipment and tooling for rotary injection pumps and in-line injection pumps	326
Devices for adjusting in-line injection pumps	. 329
Couplings for fastening to the pump flange for high-pressure fuel pumps of the VP series	330
ST-03 – universal cradle for CR pumps	331

10

Electronic devices for diagnostics and repair of diesel fuel equipment

CR TESTER CRT-5040 – device for testing 1-4 CR injectors	332
FLAGMAN FULL – equipment for testing 1-4 CR injectors without coding	333
FLAGMAN-FLOW –injector dosage measuring unit 8-channel	333
FLAGMAN-CODE – equipment for testing 1-4 CR injectors with coding	334
FLAGMAN-CODE-L – equipment for testing 1-4 CR injectors with coding	335
CRISTINA – complex for assembly and adjustment of CR injectors	336
DL-UNI20150 CRISTINA - PIEZO – PIEZO injector tester CR	337
DL-UNI20150A CRISTINA - PIEZO ACOUSTIC – PIEZO injector tester CR.	338
DL-UNI20050 CRISTINA - PIEZO – set for check and regul. PIEZO-CR injectors	339
DL-UNI20050F CRISTINA - PIEZO – set for check and regul. PIEZO-CR injectors	340
DL-UNI20050A CRISTINA - PIEZO ACOUSTIC - kit for checking and adjusting PIEZO injector	ors
CR	341
DL-UNI20050FA CRISTINA - PIEZO ACOUSTIC - kit for checking and adjusting PIEZO i njec	tors
CR	342
DL-UNI20051 set for checking and adjusting PIEZO injectors CR without clamp	
DL-UNI20051A set for checking and adjusting PIEZO injectors CR without clamp	344
Additional equipment for CRISTINA-PIEZO	345
CR-NeXT – Armature activator device for Common-Rail injector solenoid valve	350
Device for measuring the capacitance of piezo-packet injectors RLC	351
PUMP TEST.02 – equipment for testing injection pump CR	352
FMDE-520 – instrument for checking the performance of injection pump CR	353
PTC-2520 CP TESTER – injection pump tester CR	353
UIS-TESTER Multi-CAM – device for testing unit injectors and pump sections	354



PR- INDICATOR – electronic pressure gauges	.355
PR-TESTER.V05 – 2-channel pressure measuring device	.356
PR-TESTER.V03 – a device for measuring pressure. Oscilloscope attachment	.358
CR test kits	.359

11

Control and measuring tool and Instrumentation

Pressure gauges and accessories	361
Dial-type mechanical measuring heads	
Indicator measuring heads	
Racks magnetic for installation of an indicator measuring head	
Digital caliper. Digital micrometer.	373
Stand for digital micrometer	
Комплекты для измемерения компрессии в дизельных двигельных	374
Set for measuring fuel pressure in the low pressure line in diesel and gasoline engines	
Torque wrenches, adapters	
Hand presses	
Set of goniometers to control the tightening of the atomizer nut	

Filters and consumables for
test stands for Diesel Fuel Equipment

Liquid fine filters	.379
Filters - settlers. Liquid filters. Mesh 15 µm for filters	.380
High pressure filter adapter DL-UNF21100	.381
High pressure filter for pressure accumulators (Rail)	.381
Adapter with high pressure Bosch filter	.381
Calibration fluid SRS	.382
Supplied complete with power supply.	.383
Fittings for connecting hydraulic and pneumatic systems	.384

13

Spare parts for repair Diesel Fuel Equipment and other equipment

Adjusting washers for Common-Rail injectors BOSCH	388
Adjusting washers for CR DENSO injectors	. 393
Adjusting washers for Common-Rail VDO (SIEMENS) PIEZO injectors	394
Adjusting washers and adjusting elements for Common-Rail injectors DELPHI	395
Adjusting washers for Unit Injectors (UIS) and Single Pumps (PLD)	. 396
Tools and fixtures for grinding washers and other parts	398



Control boards for Dieselland equipment

Control boards for Dieselland equipment_____399



TRIUMF benches are manufactured with the possibility of retrofitting with a hardware and software complex for encoding Bosch, Delphi, Denso injectors. To encode the Delphi injectors, a device is additionally installed, which allows to create a vacuum in the backleak line of the injector. The set of the vacuum creating device is a gear pump, a venturi tube and an electric motor. The device is installed on the bulkhead, which is located in the lower part of the bench above the cooling unit.

• The software allows you to code injectors BOSCH isa / ima cod, Delphi C2i / C3i / C4i*, Denso, VDO Siemens.

• Working pressure up to 1800 bar. It is possible to increase the working pressure to 2400 bar.

- The stand is produced with the following characteristics of the main drive:
 - TRIUMF 4 kW 380 V
 - TRIUMF 5,5 kW 380 V

* coding Delphi C4i in the stand TRIUMF 5,5 kW 380 V



Software «CASCADE»



The software has a user-friendly interface. The program contains built-in test plans for testing and coding Bosch, Delphi, Denso, Siemens (VDO) injectors. Functions for creating new test plans, editing built-in ones, as well as creating targets for Delphi C2i, C3i, C4i injectors are available. The results and progress of testing are displayed in graphical form and saved to a file and sent to print.

The stand is equipped with a modern system of thermal stabilization test liquids in the tank, which includes:

1. Two radiators with forced air cooling for the backflow line from the injection pump and the backflow line from the pressure accumulator (rail).

2. Pressure accumulator with cooling. The rail cooling line includes an individual air-cooled radiator and a circulation pump.

- 3. Independent refrigeration unit with air heat exchanger.
- 4. Three individual thermal controllers for controlling radiator fans.
- 5. Tubular electric heater with a power of 1000 W for heating the test liquid in the tank.
- Operating pressure up to 2400 bar.
- The pressure is controlled by two regulators.
- The stand has an electronic measurement system with the ability to check four injectors at the same time.
- The stand is equipped with a frequency converter.





TRIUMF

STAND EQUIPMENT

DL-CAU001





Alt.





Cable for BOSCH injectors (universal)

DL-CAU002 Cable for Delphi injectors (C2i, C3i)

DL-CAU003 Delphi injector cable (C3i)

DL-CAU004 Cable for injectors BOSCH, SIEMENS













Cable for cargo injectors

Cable for BOSCH injectors

DL-CAU005

DL-CAU007

DL-CAU006 Universal cargo injector cable

DL-CAU09 Pressure sensor cable

DL-CAU10
Pressure regulator connection cable

dieselland.ru | dieselland.biz | dieselland@mail.ru

TRIUMF

STAND EQUIPMENT





Set of fittings for reverse draining CR injectors



DL-UNI30997

Nozzles for sprayers nozzles Ø= 9 mm (2 pcs.)



DL-UNI50083

Adapter straight with M14 on M12 for tube (4 pcs.)



DL-CR10015

Nozzle holder frame with cups for sprayers 7 mm and clamping sleeves

DL-UNI31019 Ø=17 (4pcs.) DL-UNI31020 Ø=18,9 (1pcs.) DL-UNI31021 Ø=19,2 (1pc.) DL-UNI31022 Ø=21 (1pc.) DL-UNI31231 Ø=21,4 (1pcs.)

590 590 590 590



Reverse set drain nozzle Denso (4 pcs.)

0000

DL-CR50162

Stubs on RAIL (4 things.)

DL-TVD41414

High pressure pipes M14xM14x400mm (4 pcs.)



DL-UNI30497

DL-54127

Leg (foot with

bolt) (4 pcs.)

regulating

Stub instead regulator pressure (1 pc.)







dieselland.ru | dieselland.biz | dieselland@mail.ru

OPTIONAL EQUIPMENT AND ACCESSORIES



DL-MOK

Coupling adapter with check valve \emptyset 6 x \emptyset 6mm with collet





Valve for respons time (DELPHI)





Check valve BOSCH electromagnetic injectors on the stand



DL-CR50210

Return pressure valve for testing piezo injectors SIEMENS at the booth



DL-CR50177

Return pressure valve for Bosch piezo injectors





OPTIONAL EQUIPMENT AND ACCESSORIES



DL-CR50013

Universal adapter for cargo injectors CR (Bosch, Denso, Delphi Smart) for supply connection and back drain with approach angles 0° , 4° and 13° .



DL-CR50140

Universal adapter for trucks injectors CR Denso, including Volvo 21952974 for supply and return connection.



OPTIONAL EQUIPMENT AND ACCESSORIES

ADAPTERS FOR TESTING CARGO INJECTORS



DL-033 **DL-CR31479**

DENSO

DL-034 (CR31538)

DENSO 1211 11L1063 (095000-121)

DL-035 DL-CR31561

DENSO



DL-013 DL-CR30968

DELPHI SMART INJECTOR

DI -07

DL-CR31044



DL-019 DL-CR30804

BOSCH MTU



DI -031 DL-CR31040

BOSCH 0445120303



DL-037 **DL-CR50304**

MB Actros



DI -08 DL-CR31045

BOSCH MAN Ø 26мм



DL-014 DL-UNI30038

DENSO



DL-020 DL-CR30596

SCANIA 4 PIN

DI -032

DL-CR31430 BOSCH





DL-038 DL-CR31606

5296723 DENSO



DL-CR31563

Delphi A9362187

Mersedes Actros

Euro 6

TRIUMF

OPTIONAL EQUIPMENT AND ACCESSORIES

DL-UNF20420L

A set of sedimentation filters for testing injectors on the stand TRIUMPH. Designed for preliminary cleaning of nozzles before their bench test.



Комплект поставки:

- 1. **DL-UNF20300L** Settling filter (inlet on the left) 2 pcs.
- 2. **DL-UNI31427** Adapter 1/8"xM14x1.5mm 4 pcs.
- 3. **34-RL010602** Quick adapter straight \emptyset 6x1/4" 2 pcs.
- 4. **34-RL310602** Quick adapter angled Ø 6x1/4" 2 pcs.
- 5. **DL-UNI31399** Splitter ¹/₄" 1 pc.

Attention! All items are also sold separately.



DL-UNF20420L

Filter - sump (entrance on the left) *The filter contains:*

- 1. Holes for entry and exit M14x1.5mm
- 2. Mounting holes Ø 8mm



DL-UNI31399

Splitter ¼" *Attached to the splitter:*

- . 34-RL010802 Two quick adapters Ø 8mm (at ends)
- 2. **34-RL310601** Two corner fast adapter Ø 6mm (at the ends)




TRIUMF

OPTIONAL EQUIPMENT AND ACCESSORIES

DL-UNI01792


A set of open-end wrenches for the TRIUMF stand has a convenient and secure fixation of keys directly in the test bench.

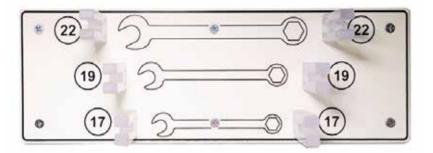

Contents of delivery:

- 1. DL-TRF50244 Key holder
- 2. DL-UNI31217 Open-end wrench 17x17mm -1 pc
- 3. DL-UNI31219 Open-end key. 19x19mm -1 pc.
- 4. **DL-UNI31222** Open-end key. 22x22mm -1 pc.

Attention! All keys are also sold separately.



DL-ORV6

Air defense radiator for pressure accumulator stands TRIUMF



OPTIONAL EQUIPMENT AND ACCESSORIES

DL-HEUI0037

TRIUMF Low Pressure Equipment 0-8 bar for HEUI injector chec ks

24-DBK-06L	Three-way valve 3/8"	1 pc.
26-04020-06	Connecting sleeve 3/8".	1 pc.
13-VMP-06	Safety valve (SV) 3/8"	1 pc.
DL-UNI20024	SV mounting bracket to oil filter with 2 screws M16x16mm	1 pc.
13-VRFB04	Throttle 1/4"	1 pc.
DL-UNI31316	SS washer 50x22mm "OIL SUPPLY" (FUEL SUPPLY)	1 pc.
041616005	Support washer, hole diam. 22mm	1 pc.
DL-UNI30020	Union 1/4"x8mm (discharge to tank from SV)	1 pc.
DL-UNI30859	Union 3/8"x8mm (discharge from SV to tank)	1 pc.
DL-UNI30530	Union 3/8"x3/8" (three-way valve: 2 pc. SV: 1 pc.)	3 pcs.
DL-UNI30363	Banjo bolt 3/8"	2 pcs.
DL-UNI30365	Banjo bolt 1/4"	1 pc.
12-03-005	Banjo female, diam. 14mm (1/4")	1 pc.
34-MA16-08-14	Quick adapter, elbow, 8mm x 1/4"	2 pcs.
DL-UNI31036	Special union 3/8"x3/8"x1/8" for supply.	1 pc.
DL-UNI31024	Special union 3/8"x3/8"x for leak-off	1 pc.
A50051-06-06	Elbow union 3/8"x8mm for special unions.	2 pcs.
DL-UNI20016	Pressure gauge bracket	1 pc.
12-TG63-010	Flanged pressure gauge 0-10 bar	1 pc.
DL-UNI30613	Pressure gauge sleeve 1/4"x 1/8"	1 pc.
34-MA12-04-18	Quick adapter, diam. 4mm x 1/8"	1 pc.
34-PTFE-04-250	PVC tube 4mm x 250mm for pressure gauge	1 pc.



OPTIONAL EQUIPMENT AND ACCESSORIES

P1331012019-850	PVC tube 8mm x 850mm for drain from throttle to tank	1 pc.
TI-1ZTX-06-090	High-pressure fuel line 3/8"x 3/8" L=90 cm	1 pc.
18-806-008-173	Low-pressure fuel line (LPFL) 8mm L=173cm (SV-Spec. union. "Oil Supply").	1 pc.
18-806-008-155	LPFL 8mm L=155cm (Throttle-Special union "Oil Return")	1 pc.
18-806-008-105	LPFL inside diam. 8mm L=105cm (SV-tank)	1 pc.
DL-UNI20021	Washer with marking "FUEL SUPPLY"	1 pc.
DL-UNI20022	Washer with marking "FUEL RETURN"	1 pc.
0540159	Clamps 15mm	8 pcs.
004636	Screw M3x6mm for pressure gauge mounting	3 pcs.
0046435	Screw M4x35mm	6 pcs.
0083645	Screw M6x45mm+washer+nut for SV mounting	2 set
D-GM1504AN	Rubber-metal washer 1/4" for banjo bolt on throttle	2 pcs.
D-GM1506AN	Rubber-metal washer 3/8" for three-way valve	4 pcs.

ATTENTION! The three low-pressure fuel lines (LPFL, items 25, 26 and 27) can be supplied as a single 433cm LPFL




TRIUMF

OPTIONAL EQUIPMENT AND ACCESSORIES

DL-HEUI0037

Equipment for 0-8 bar low pressure generation for checking of HEUI unit injectors using the test bench TRIUMF

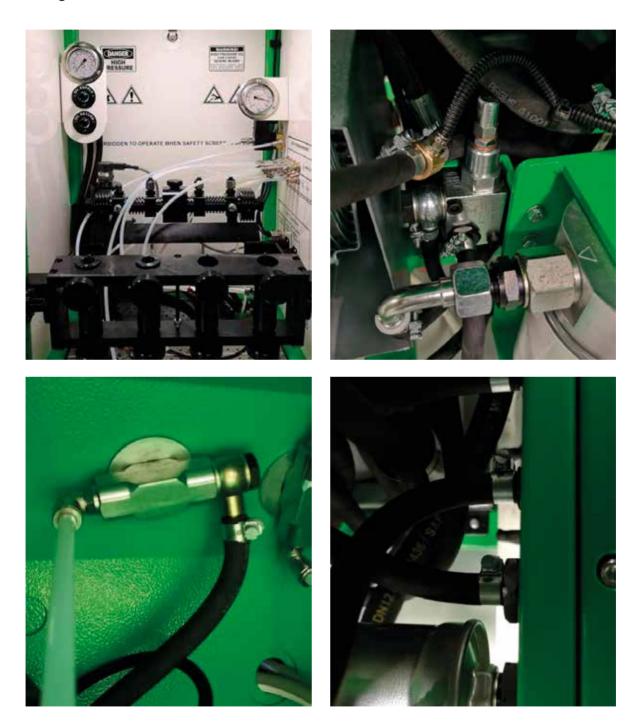



TRIUMF

OPTIONAL EQUIPMENT AND ACCESSORIES

DL-HEUI0037

Equipment for 0-8 bar low pressure generation for checking of HEUI unit injectors using the test bench TRIUMF





TRIUMF

OPTIONAL EQUIPMENT AND ACCESSORIES

HEUI INJECTOR TESTING TOOL

HEUI CATERPILLAR 3126B, CATERPILLAR 3126E µ FORD 1998-2003 DIESEL 7.3 FUEL INJECTOR 128-6601, AD1831489C1 (INTERNATIONAL)



Equipment includes:

1. **DL-HEUI50223** Pump installation adapter nozzles



- 2. DL-HEUI50240 Set of hydraulic hoses and HP line 400mm 14x14mm
- 3. **DL-HEUI50218** Adapter holder with clamping strip.
- 4. DL-HEUI50230 Adapter cable for connecting the unit injector
- 5. **DL-UNI50084** Angular adapter M14.



Attention! All accessories are sold separately.

HEUI CATERPILLAR C7-C9

Equipment includes:

- 1. DL-HEUI50221 Pump inst nozzles
 - Pump installation adapter nozzles





CRUIS

The **CRUIS** stand allows you to perform procedures related to testing and checking Common-Rail injectors from manufacturers such as Bosch, Denso, Delphi, VDO (Siemens), Cummins, AZPI, as well as HEUI Caterpillar unit injectors installed on diesel engines of light and medium-sized automobiles, including high-speed engines of cars and trucks, buses, agricultural machinery and tractors.

• The software allows coding BOSCH isa / ima cod, Delphi C2i / C3i / C4i*, Denso, VDO Siemens injectors.

- Stand working pressure up to 2400 bar.
- The stand is produced with the following characteristics of the main drive:
 - CRUIS 4 kW 380 V,
 - CRUIS 5.5 kW 380 V,
 - CRUIS 4 kW 220 V

* Delphi C4i coding in CRUIS 5.5 kW 380 V

When installing additional equipment, the CASCADE program allows you to test HEUI unit injectors.





CRUIS

Software «CASCADE»



The stand has a low noise level.

When starting the high-pressure pump, its smooth spin-up is ensured due to the use of a Schneider frequency converter in the stand.

The design of the CR test stand and the elements of its equipment meet the requirements of international standards in terms of static and dynamic parameters of ISO 4008/1 and ISO 4008/2.

For coding Delphi injectors, a device is used that allows creating a vacuum in the injector backflow line. The set of the device that creates a vacuum includes a gear pump, a venturi tube and an electric motor. The device is installed at the bottom of the stand next to the refrigeration unit. Also, in the working (test) area at the top right, a pressure gauge is installed that measures the vacuum with an electrovalve providing vacuum access to the nozzle. In this case, the vacuum is regulated by a throttle valve installed under the monitor on the left. When coding Delphi injectors in the CRUIS stand, a sensor is used that determines the injection start time.

The program with test plans is included in the package. Software updates that include new test plans are released twice a year and are provided free of charge.

For thermal stabilization of the test liquid in the tank, the following are used:

1. two radiators with forced air cooling for the backflow line from the injection pump and the backflow line from the pressure accumulator (rail).

- 2. independent refrigeration unit with air heat exchanger.
- 3. tubular electric heater 1000 W

Operating pressure up to 1800 bar. It is possible to increase the working pressure up to 2400 bar.

The stand has an electronic measurement system with the ability to check one nozzle.



1

STANDS and EQUIPMENT for testing common rail injectors and pumps

CRUIS

STAND EQUIPMENT



equinment for diese

DL-CAU011 Cable for BOSCH injectors (universal)

DL-CAU012 Cable for Delphi injectors (C2i, C3i)

DL-CAU013 Delphi injector cable (C3i)

DL-CAU014 Cable for injectors BOSCH, SIEMENS

DL-CAU015 Cable for BOSCH injectors

DL-CAU016 Universal cargo injector cable

DL-CAU017 Cable for cargo injectors

DL-CAU09 Pressure sensor cable

DL-CAU10 Pressure regulator connection cable

dieselland.ru | dieselland.biz | dieselland@mail.ru

CRUIS

STAND EQUIPMENT



Set of fittings for reverse drain nozzles CR BOSCH, DENSO, DELPHI, SIEMENS



High pressure tube M14 x M14 x 400мм (1 шт.)







DL-UNI50083

Adapter straight from M14 to M12 for tubes (1 шт.)



DL-UNI30497

Stub instead regulator pressure (1 шт.)

Plug for RAIL (1 шт.)

DL-CR50162



Ø17; Ø18,9; Ø19,2;



DL-CR50015

Sensor for coding Ø=7мм (1шт.)



DL-UNI30997

Spray nozzle nozzles Ø=9 мм (1 шт.)



Ø21 и Ø21,4

DL-54127

Leg (foot with adjustable bolt) (4 шт.)

OPTIONAL EQUIPMENT AND ACCESSORIES



DL-UNI50273

Handle for convenient stand movement. Set includes 2 handles



CRUIS

OPTIONAL EQUIPMENT AND ACCESSORIES



DL-MOK

Coupling adapter with check valve \emptyset 6 x \emptyset 6mm with collet





Valve for respons time (DELPHI)



DL-CR50136

Check valve BOSCH electromagnetic injectors on the stand



DL-CR50210

Return pressure valve for testing piezo injectors SIEMENS at the booth



DL-CR50177

Return pressure valve for Bosch piezo injectors





CRUIS

OPTIONAL EQUIPMENT AND ACCESSORIES



DL-CR50013

Universal adapter for CR truck injectors (Bosch , Denso, Delphi Smart) for supply and backflow lines at angles of 0° , 4° and 13° . It is used both for testing nozzles on test benches, and when checking the spray part of nozzles on a hand press.



DL-CR50140

Adapter for truck injectors CR Denso, including Volvo21952974 for connecting the supply and overflow drain



CRUIS

OPTIONAL EQUIPMENT AND ACCESSORIES

ADAPTERS FOR TESTING CARGO INJECTORS





DI -08 DL-CR31045

BOSCH MAN Ø 26мм



DL-014 DL-UNI30038

DENSO



DL-020 DL-CR30596

SCANIA 4 PIN



DI -032 DL-CR31430

BOSCH 0445120134



DL-038 DL-CR31606

5296723 DENSO



DL-021 DL-CR31565

BOSCH CRIN3 0445124015



DL-033 **DL-CR31479**

DENSO

DL-034 (CR31538)

equinment for diese

DENSO 1211 11L1063 (095000-121)

DL-035 DL-CR31561

DENSO

DL-036 **DL-CR31563**

Delphi A9362187 Mersedes Actros Euro 6

DL-037 **DL-CR50304**

MB Actros



CRUIS

OPTIONAL EQUIPMENT AND ACCESSORIES

DL-UNF20420R

Set of pit filters for the injector testing on CRUIS test bench

Designed for pre-cleaning the injectors before they are tested on the test bench.



Contents of delivery:

- 1. **DL-UNF20300R** Settling filter (entrance on the right) 2pc
- 2. **DL-UNI31427** Adapter 1/8"xM14x1,5mm 4pc
- 3. 34-RL010602 Quick adapter straight Ø 6x1/4" 2pc
- 4. **34-RL310602** Quick adapter angled Ø 6x1/4" 2pc
- 5. **DL-UNI31399** Splitter ¼" 1pc

Attention! All items are also sold separately.



DL-UNF20300R

Pit filter (entrance on the right) *The filter contains:*

- 1. Holes for entry and exit M14x1,5mm
- 2. Mounting holes Ø 8mm



DL-UNI31399

Splitter ¼" *Attached to the splitter:*

- . 34-RL010802 Two quick adapters Ø 8mm (at ends)
- 2. **34-RL310601** Two corner fast adapter Ø 6mm (at the ends)




CRUIS

OPTIONAL EQUIPMENT AND ACCESSORIES

DL-UNI01791

Set of open-end spanners for the CRUIS stand.

The set has a convenient and secure fixation of keys directly in the test bench.

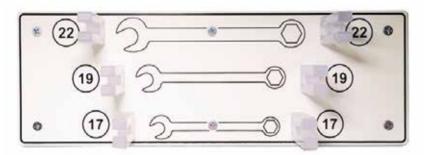

Contents of delivery:

- 1. DL-TRF50243 Key holder
- 2. DL-UNI31217 Open end wrench 17x17mm -1 pc
- 3. DL-UNI31219 Open end wrench 19x19mm -1 pc
- 4. DL-UNI31222 Open end wrench 22x22mm -1 pc

Attention! All keys are also sold separately.



DL-ORV3

Air Defense Radiator for Cruis Stand Pressure Accumulator



CRUIS

OPTIONAL EQUIPMENT AND ACCESSORIES

DL-HEUI0038

Equipment for creating low pressure 0-8 bar CRUIS for

HEUI injector checks

24-DBK-06L	Crane 3-way 3/8"	1 pc
26-04020-06	Coupling 3/8"	1 pc
13-VMP-06	Safety valve (PC) 3/8"	1 pc
DL-UNI20023	Bracket for fastening the PC to the FTO (filter) bracket	1 pc
13-VRFB04	Choke 1/4"	1 pc
DL-UNI31316	Stainless steel washer 50 x 22mm "OILSUPPLY" (FUELSUPPLY)	1 pc
041616005	Washer persistent Ø otv. 22mm	1 pc
DL-UNI30020	Fitting 1/4 "x 8mm (draining into the tank from the PC)	1 pc
DL-UNI30859	Fitting 3/8" x 8mm (drain from PC to tank)	1 pc
DL-UNI30530	Fitting 3/8" x 3/8" (3-way valve - 2 pcs. PC - 1 pc.)	3 pcs
DL-UNI30363	Bolt Banjo 3/8"	2 pcs
DL-UNI30365	Bolt Banjo 1/4"	1 pc
12-03-005	Banjo fitting "female" Ø 14mm (1/4")	1 pc
34-MA16-08-14	Quick adapter elbow 8mm x1/4"	2 pcs
DL-UNI31036	Specialist. fitting 3/8" x 3/8" x 1/8" for supply	1 pc
DL-UNI31024	Specialist. fitting 3/8" x 3/8" for backflow	1 pc
A50051-06-06	Elbow fitting 3/8" x 8mm for special fittings	2 pcs
DL-UNI20015	pressure gauge bracket	1 pc
12-TG63-010	Flanged manometer 0-10 bar	1 pc
DL-UNI30613	Coupling for pressure gauge 1/4" x 1/8"	1 pc
34-MA12-04-18	Quick adapter Ø 4mm x 1/8"	1 pc
34-PTFE-04-250	PVC tube 4mm x 250mm for pressure gauge	1 pc



CRUIS

OPTIONAL EQUIPMENT AND ACCESSORIES

PVC pipe 8mm x 850mm for draining from the throttle into the tank	1 pc
High pressure fuel line 3/8" x 3/8" L=15cm	1 pc
LPT Ø 8mm L=104cm (PC-Special Fitting "OilSupply")	1 pc
LPT Ø 8mm L=75cm (Throttle-Special Fitting "OilReturn")	1 pc
LPT Ø vnutr.8mm L=37sm (PC-Tank)	1 pc
Washer labeled "FUELSUPPLY"	1 pc
Washer labeled "FUELRETURN"	1 pc
Clamps 15mm	8 pcs
Screw M3 x 6mm for fixing the pressure gauge	3 pcs
Screw M4 x 16mm for fastening special fittings	6 pcs
Screw M6 x 45mm + washer + nut for PC fixing	2 set
Rubber washer. 1/4" for banjo bolts on throttle	2 pcs
Rubber washer. 3/8" for 3-way valve	4 pcs
	High pressure fuel line 3/8" x 3/8" L=15cmLPT Ø 8mm L=104cm (PC-Special Fitting "OilSupply")LPT Ø 8mm L=75cm (Throttle-Special Fitting "OilReturn")LPT Ø vnutr.8mm L=37sm (PC-Tank)Washer labeled "FUELSUPPLY"Washer labeled "FUELRETURN"Clamps 15mmScrew M3 x 6mm for fixing the pressure gaugeScrew M4 x 16mm for fastening special fittingsScrew M6 x 45mm + washer + nut for PC fixingRubber washer. 1/4" for banjo bolts on throttle

ATTENTION! It is allowed to supply low-pressure fuel lines (LPF) in one piece 216 cm long.



CRUIS

OPTIONAL EQUIPMENT AND ACCESSORIES

DL-HEUI0038

CRUIS low pressure tool 0-8 bar for testing pump injector HEUI





CRUIS

OPTIONAL EQUIPMENT AND ACCESSORIES

DL-HEUI0038

CRUIS low pressure tool 0-8 bar for testing pump injector HEUI







CRUIS

OPTIONAL EQUIPMENT AND ACCESSORIES

DL-HEUI0038

CRUIS low pressure tool 0-8 bar for testing pump injector HEUI






STANDS and EQUIPMENT for testing common rail injectors and pumps

CRUIS

OPTIONAL EQUIPMENT AND ACCESSORIES

ACCESSORIES FOR CHECKING HEU INJECTORSI

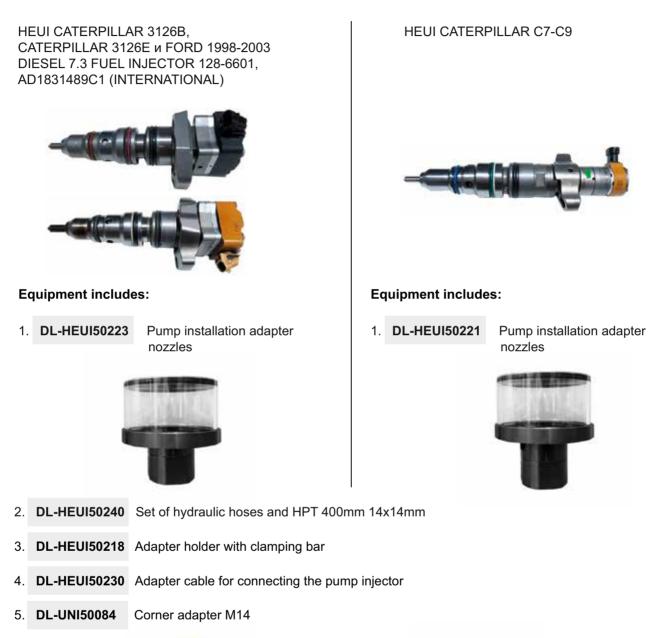



Attention! All accessories are sold separately.



The test bench **CR-Test4E** allows checking the following equipment of the COMMON RAIL system: BOSCH, DENSO, DELPHI nozzles, (SIEMENS optional), BOSCH, DENSO, DELPHI, SIEMENS pumps (CP1, CP2, CP3, HP2, HP3, DFP1, DFP3, DFP6, HP3, HP4), regulators and pressure sensors. The operating pressure of the test is up to 1800 bar. At the request of the customer, there is possibility to increase the working pressure to 2200 bar. Test bench is equipped with an electronic measuring system. Test bench includes a software with built-in test plans.

CR-Test-4E - test stand for Common Rail (CR) injectors and pumps with an electronic measurement system (simultaneous testing of up to 4 injectors); The performance of the CR injection pump is checked using a two-channel flow meter.





Software

«CASCADE»

The complex includes software software for testing CR injectors

equipment for diesel



«DieselTest»

The complex includes software pump testing software





Программное обеспечение «CASCADE»



The software has a user-friendly interface. The program contains built-in test plans for testing and coding Bosch, Delphi, Denso, Siemens (VDO) injectors. Functions for creating new test plans, editing built-in ones, as well as creating targets for Delphi C2i, C3i, C4i injectors are available. The results and progress of testing are displayed in graphical form and saved to a file and sent to print.

The stand is equipped with a modern system of thermal stabilization test liquids in the tank, which includes:

1. Two radiators with forced air cooling for the backflow line from the injection pump and the backflow line from the pressure accumulator (rail).

2. Pressure accumulator with cooling. The rail cooling line includes an individual air-cooled radiator and a circulation pump.

- 3. Independent refrigeration unit with air heat exchanger.
- 4. Three individual thermal controllers for controlling radiator fans.
- 5. Tubular electric heater with a power of 1000 W for heating the test liquid in the tank.
- Operating pressure up to 2400 bar.
- The pressure is controlled by two regulators.
- The stand has an electronic measurement system with the ability to check four injectors at the same time.
- Drive motor power for checking high pressure fuel pump 11 kW
- Drive motor power for checking injectors 5.5 kW
- The stand is equipped with frequency converters.





STANDS and EQUIPMENT for testing common rail injectors and pumps

CR-Test4E

STAND EQUIPMENT



Liquid flow meter for simultaneous checking from 1 to 4 nozzles. Installed on a stand.



FMDE-520

Liquid flow meter for pumps 2-channel. Installed on a stand.



PTC-2520

Pump control controller. Installed on a stand.



Injector controller. Installed on a stand.



STAND EQUIPMENT



DL-24CRM

Set of fittings for reverse draining CR injectors



DL-UNI30997

Nozzles for sprayers nozzles Ø= 9 mm (2 pcs.)



DL-UNI50083

Adapter straight with M14 on M12 for tube (4 pcs.)



DL-TVD61414	High pressure tube M14xM14x600mm - 2 pcs.
DL-TVD51414	High pressure tube M14xM14x500mm - 5 pcs.

590 590 590 590

D-OCDE

Reverse set drain nozzle Denso (4 pcs.)

0000



DL-CR50162

Stubs on RAIL (4 things.)





Angle adapter M14 x M14 (2 pcs.)





DL-54127

Leg (foot with regulating bolt) (4 pcs.)

DL-UNI30497

Stub instead regulator pressure (5 pcs.)



Door key (4 things.)





STANDS and EQUIPMENT for testing common rail injectors and pumps

CR-Test4E

STAND EQUIPMENT



DL-CR10015

Nozzle holder frame with cups for sprayers 7 mm and clamping sleeves

DL-UNI31019Ø=17 (4pcs)DL-UNI31020Ø=18,9 (1pc)DL-UNI31021Ø=19,2 (1pc)DL-UNI31022Ø=21 (1pc)DL-UNI31231Ø=21,4 (1pc)



DL-CR30522KIT

Pressure accumulator RAIL 1 (distributive) for 3 regulators pressure for checking injectors and CR pumps. Installed on a stand.



DL-CR31257

Pressure accumulator RAIL 2 for checking injectors and pumps with cooling (for 2 pressure regulators) Installed on a stand.



DL-CR31053KIT

RAIL 3 pressure accumulator for 3 pressure regulators (with cooling) to test pumps. Installed on a stand.



STANDS and EQUIPMENT for testing common rail injectors and pumps

CR-Test4E

STAND EQUIPMENT



DL-UNI50008

Bracket for pumps, Bosch standard 125 mm installed at the stand

FLANGES



DL-UNI30428

Mounting flange for injection pump 107 mm CP-3, installed on the stand



DL-UNI30465

Mounting flange for injection pump CR (BMW, RENAULT, MB, Peugeot)



DL-UNI30464

Mounting flange for injection pump CR (MB)



DL-UNI30474

Mounting flange for injection pump MAN CP3 MAN, similar to Bosch 1685720258



DL-UNI30884

Mounting flange for injection pump MAN CP3.4, similar to Bosch 1685720312



DL-UNI30886

Mounting flange for injection pump 107 mm CP2 Bosch 0445020036 (Renault).



ΛΖ

DL-CR30860

Mounting flange for injection pump CR DENSO HP2, HP3.





DL-CR31251

COUPLINGS

Coupling cone 24mm for High pressure fuel pump CR CP-3

DL-CR31271

Coupling cone 17mm for checks of CR pumps and high pressure fuel pump VE

DL-CR31269

Cone coupling 19mm for checks of CR pumps and high pressure fuel pump VE



DL-CR31248

Coupling spline (11 spline) for testing pumps MAN CR CP-3



DL-UNI31025

Coupling for injection pump Bosch CP1 (included insert UNI31028 with groove width 8 mm) and for high pressure fuel pump VDO

(included insert UNI31027 with 9 mm groove). Can be used on Bosch stands instead of coupling 1685702090.



STAND EQUIPMENT



DL-FMDE064

Hose for measuring the "supply" of the injection pump" from the pressure accumulator to the fitting entrance to the cooling radiator (RAIL -CR PUMP FM1) ø12x3/8x200mm with bolt, Banjo fitting and 2 gaskets. 1 PC.

DL- FMDE025

Set of 2 hoses for connection from the fittings on the front panel "CR PUMP FM1" and "CR PUMP FM2" to connectors "IN1" and "IN2" of the controller flow measurement "FMDE". (hoses installed on the stand). The kit includes:

- Hose 3/8x3/8x250mm 1 pc.
- Hose 3/8x3/8x350mm 1 pc.



DL-FMDE045

Set of 2 hoses for connection from fittings "OUT 1" and "OUT 2" flow measurement controller "FMDE" to the fittings drain into the tank of the stand (hoses are installed on the stand) The set includes:

- Hose 3/8x3/8x1550mm 1 pc.
- Hose 3/8x3/8x1550mm 1 pc.



DL-1CP2304

Set of 5 hoses for pumps CP1, CP2, CP3. The set includes:

- Hose ø12x3/8x700mm -1pc.
- Hose ø12x3/8x800mm 1 pc.
- Hose ø12x3/8x850mm 1 pc.
- Hose ø12x3/8x700mm -1pc.
- Hose ø12x3/8x800mm 1 pc.
- Hose ø12x3/8x850mm 1 pc.



DL-2UMS004

Set of 7 hoses for various connections. The set includes:

- Universal hose Ø8x3/8x1000mm. 3 pcs.
- Universal hose Ø10x3/8x1000mm. 4 pcs.



STANDS and EQUIPMENT for testing common rail injectors and pumps

CR-Test4E

STAND EQUIPMENT

Connection set

DL-KUK0040



Kit includes :

- Conical fitting 3/8 "x10 mm 4 pcs.;
- Taper fitting 3/8"x8 mm 3 pcs.;
- Clamp Ø15 7 pcs.;
- Clamp Ø10 7 pcs.;
- Banjo fitting Ø16 mm x 10 mm 2 pcs.;
- Banjo fitting Ø14 mm x 10 mm 2 pcs.;
- Banjo fitting Ø12 mm x 8 mm 2 pcs.;
- Bolt Banjo M16 2 pcs.;
- Bolt Banjo M14 2 pcs.;
- Bolt Banjo M12 6 pcs.;
- Gasket Ø12 mm 16 pcs.;
- Gasket Ø14 mm 12 pcs.;
- Gasket Ø16 mm 12 pcs.;
- Gasket Ø21 mm (1/2") 1 pc.;
- Plastic fitting for VDO pumps (Siemens) 1 pc.
- Fitting 1/2"x3/8" 1 pc.;
- Fitting M16x1.5x3/8" 1 pc.
- Adapter M12xM16 (pitch 1.5 mm) 4 pcs.
- Adapter M12xM14 (pitch 1.5 mm) 4 pcs.
- Adapter M12xM12vn (pitch 1.5 mm) 4 pcs.



STAND EQUIPMENT



0 281 002 842

Pressure sensor Bosch (2pcs) on Rail, installed on the stand



pressure regulator Bosch (5pcs) on Rail, installed on the stand





















DL-CAU001 Cable for BOSCH injectors (universal)

DL-CAU002 Cable for Delphi injectors (C2i, C3i)

DL-CAU003 Delphi injector cable (C3i)

DL-CAU004 Cable for injectors BOSCH, SIEMENS

DL-CAU005 Cable for BOSCH injectors

DL-CAU007 Cable for cargo injectors

DL-CAU006 Universal cargo injector cable

DL-CAU09 Pressure sensor cable

DL-CAU10 Pressure regulator connection cable

dieselland.ru | dieselland.biz | dieselland@mail.ru

OPTIONAL EQUIPMENT AND ACCESSORIES



DL-MOK

Coupling adapter with check valve \emptyset 6 x \emptyset 6mm with collet





Valve for respons time (DELPHI)





Check valve BOSCH electromagnetic injectors on the stand



DL-CR50210

Return pressure valve for testing piezo injectors SIEMENS at the booth



DL-CR50177

Return pressure valve for Bosch piezo injectors





OPTIONAL EQUIPMENT AND ACCESSORIES



DL-CR50013

Universal adapter for CR truck injectors (Bosch , Denso, Delphi Smart) for supply and backflow lines at angles of 0° , 4° and 13° . It is used both for testing nozzles on test benches, and when checking the spray part of nozzles on a hand press.




DL-CR50140

Adapter for truck injectors CR Denso, including Volvo21952974 for connecting the supply and overflow drain



OPTIONAL EQUIPMENT AND ACCESSORIES

ADAPTERS FOR TESTING CARGO INJECTORS

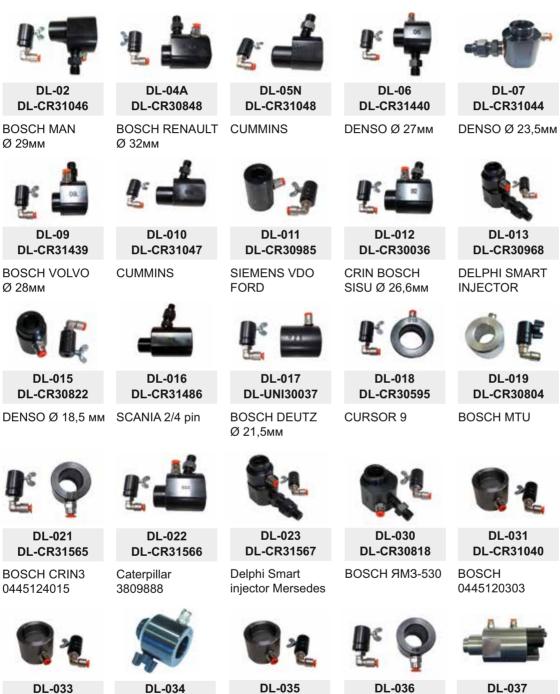

Mersedes Actros Euro 6



DI -07

DL-013

DL-019



DI -08 DL-CR31045

BOSCH MAN Ø 26мм



DL-014 DL-UNI30038

DENSO



DL-020 DL-CR30596

SCANIA 4 PIN



DI -032 DL-CR31430

BOSCH 0445120134



DL-038 DL-CR31606

5296723 DENSO



DL-CR31479 (CR31538)

DENSO 1211 11L1063 (095000-121)

DL-035 DL-CR31561

dieselland.ru | dieselland.biz | dieselland@mail.ru

DENSO

DL-CR31563

DL-036

BOSCH 0445120303



DI -031

DL-037

DL-CR50304

MB Actros

Delphi A9362187

50

DENSO

OPTIONAL EQUIPMENT AND ACCESSORIES

ACCESSORIES FOR CHECKING HEU INJECTORSI

HEUI CATERPILLAR 3126B, CATERPILLAR 3126E µ FORD 1998-2003 DIESEL 7.3 FUEL INJECTOR 128-6601, AD1831489C1 (INTERNATIONAL)



Equipment includes:

1. **DL-HEUI50223** Pump installation adapter nozzles



- 2. DL-HEUI50240 Set of hydraulic hoses and HPT 400mm 14x14mm
- 3. DL-HEUI50218 Adapter holder with clamping bar
- 4. **DL-HEUI50230** Adapter cable for connecting the pump injector
- 5. DL-UNI50084 Corner adapter M14



Attention! All accessories are sold separately.





HEUI CATERPILLAR C7-C9

Equipment includes:

- 1. DL-HEUI50221 Pump inst nozzles
 - Pump installation adapter nozzles



CR-Test4E CR-JET-4EM

OPTIONAL EQUIPMENT AND ACCESSORIES

DL-KD020 DELPHI INJECTOR CODER FOR STAND CR-TEST-4E AND CR-JET-4EM



Contents of delivery:

- 1. Control valve
- 2. Vacuum pressure gauge
- 3. *Pressure accumulator (Rail)
- 4. Sensor for coding
- 5. Pressure valve for Delphi injectors
- 6. Venturi tube
- 7. Signal booster

- 9. Tap adjustment
- 10. Electric motor ~230V 50Hz
- 11. Coupling
- 12. Bracket
- 13. Vacuum pump
- 14. Tee with fitting
- 15. Connecting hose a 8mm
- 16. Connecting hose
 a 10mm

* for additional order



CR-Test4E CR-Test-2P

OPTIONAL EQUIPMENT AND ACCESSORIES

DL-UNF20400

A set of sedimentation filters for checking high-pressure fuel pumps at the stand CR-TEST-4E and CR-TEST-2P



1.	DL-UNF20300L	Settling filter (entrance on the left) - 2 pcs.
2.	DL-UNI50211	Extended adapter 3/8" x M14 x 1.5mm - 2 pcs.
3.	DL-UNI31161	Reducer short 3/8" x M14 x 1.5mm - 2 pcs.
4.	DL-UNI50213	mounting bracket filters.

DL-UNF20410

Sump filter kit for checking injectors at the stand CR-TEST-4E

Designed for pre-cleaning nozzles before their check on the stand.



Contents of delivery:

1. DL-UNF20300L	Settling filter (entrance on the left) - 1 pc.
2. DL-UNF20300R	Settling filter (entrance on the right) - 1 pc.
3. DL-UNI31427	Adapter 1/8" x M14 x 1.5mm - 4 pcs.
4. 34-RL020602	Quick adapter straight Ø 6x1/4" – 2 pcs.
5. 34-RL310602	Quick adapter angled Ø 6x1/4" – 2 pcs.
6. DL-UNI50212	Filter mounting bracket.
7. DL-UNI30090	Mounting bolt with M14 nut.





CR-Test4E CR-Test-2P

OPTIONAL EQUIPMENT AND ACCESSORIES



DL-CR31497

Adapter for measuring the pressure of the CR booster pump

ATTENTION! The adapter is supplied without tube fittings and pressure gauge!

DL-CR31497KIT

Adapter kit for measuring the pressure of the Common Rail feed pump.

Contents of delivery:

1.	DL-SP09570	L-shaped "quick" adapter M5 x 4mm
2.	DL-SP09580	The union "mother" 1/4" x 4 mm for the manometer
3.	DL-P1002	Flexible PVC tube dia.4mm (100cm)

4. **D-12-TV63-016** Pressure gauge 16 bar with bottom fitting 1/4"



DL-ORV9

Air-cooled radiator for testing MAN high-pressure fuel pumps workbenches CR-TEST-2P/CR-TEST-4E



TRIUMFCR-Test-4ECRUISCR-JET-4EM

OPTIONAL EQUIPMENT AND ACCESSORIES

Set of split bushings (basic) for installing injectors



ATTENTION! All bushings are sold separately.

Set of split bushings (additional) for installing injectors



ATTENTION! All bushings are sold separately.




TRIUMFCR-Test-4ECRUISCR-JET-4EM

OPTIONAL EQUIPMENT AND ACCESSORIES

C4i-CODE DELPHI C4i injector coding

Software for the CASCADE program that allows code DELPHI C4i injectors on CRUIS, TRIUMF, CR-Test-4E test benches, CR Jet

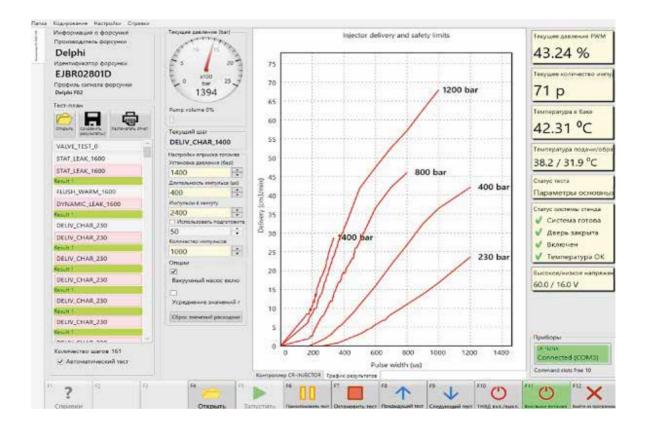



CR-Test2P

Stand **CR-Test2P** for testing high pressure fuel pumps Common Rail system.

The CR-TEST-2P test bench allows you to perform procedures related to the testing of high-pressure fuel pumps of the Common Rail system of various manufacturers (Bosch, Denso, Delphi, VDO (Siemens)). The design of the test stand CR-TEST-2P and the elements of its equipment meet the requirements of international standards in terms of static and dynamic parameters-ISO 4008/1 and ISO 4008/2.

CR-Test-2P – is a CR pump test stand with a 2-channel electronic measurement unit.





CR-Test2P

Software







STANDS and EQUIPMENT for testing common rail injectors and pumps

CR-Test2P

STAND EQUIPMENT





FMDE-520

Liquid flow meter for pumps 2-channel. Installed on a stand.



Pump control controller. Installed on a stand.





High pressure tube M14 x M14 x 600mm for pumps CP2 – 2 pcs.

High pressure tube M14 x M14 x 500mm for pumps CP1, CP3 -1 pc.



DL-CR50162

Stubs on RAIL. Installed on the stand - 4 pcs.

0 281 002 842

Safety bosch valve on rail, installed on the stand



DL-CR31053

RAIL 3 pressure accumulator for 3 regulators pressure (with cooling) to test pumps. Installed on a stand.



0 281 002 494

Bosch pressure regulator on Rail (3pcs), installed at the stand



0 281 002 842

Bosch pressure sensor on Rail, installed at the stand



DL-54127

Leg (foot with regulating bolt) (4 pcs.)



Door key (4 pcs.)

STANDS and EQUIPMENT for testing common rail injectors and pumps

CR-Test2P



DL-CAU018

Connection cable pressure sensor



STAND EQUIPMENT



DL-CAU019

Connection cable pressure regulator LP-2

DL-UNI50008

Bracket for pumps, Bosch standard 125 mm. Installed on a stand.



DL-CAU020

Connection cable pressure regulator NR-3

FLANGES



DL-UNI30428

Mounting flange for injection pump 107 mm CP-3, installed on the stand

DL-UNI30465

Mounting flange for injection pump CR (BMW, RENAULT, MB, Peugeot)





Mounting flange for injection pump CR (MB)



DL-UNI30474

Mounting flange for injection pump MAN CP3 MAN, similar to Bosch 1685720258





Mounting flange for injection pump MAN CP3.4, similar to Bosch 1685720312





DL-UNI30886

Mounting flange for injection pump 107 mm CP2 Bosch 0445020036 (Renault).

DL-CR30860

Mounting flange for injection pump CR DENSO HP2, HP3.







DL-CR31251

Coupling cone 24mm for High pressure fuel pump CR CP-3

DL-CR31271

Coupling cone 17mm for checks of CR pumps and high pressure fuel pump VE


DL-CR31269

Cone coupling 19mm for checks of CR pumps and high pressure fuel pump VE

DL-CR31248

Coupling spline (11 spline) for testing pumps MAN CR CP-3





Coupling for injection pump Bosch CP 1(included insert UNI31028 with groove width 8 mm) and for high pressure fuel pump VDO

(included insert UNI31027 with 9 mm groove). Can be used on Bosch stands instead of coupling 1685702090.



CR-Test2P

STAND EQUIPMENT



DL-FMDE014

Hose for measuring the "supply" of the injection pump" from the pressure accumulator to the inlet fitting into the cooling radiator (RAIL-CR PUMP FM1) ø 12 x 3/8 x 900 mm with bolt, Banjo fitting and 2 gaskets. - 1 PC.



DL-FMDE024

Set of 2 hoses for connection from fittings on the front panel "COOLLER OUT1" and "COOLLER OUT2" to connectors "IN1" and "IN2" of the controller flow measurement "FMDE". (hoses are installed on the stand)

The set includes:

- Hose ø 3/8 x 3/8 x 700 mm 1 pc.
- Hose ø 3/8 x 3/8 x 800 mm 1 pc.



DL-1CP2304

- Set of 5 hoses for pumps CP1, CP2, CP3. The set includes:
- Hose ø 12 x 3/8 x 700 mm 1 pc.
- Hose ø 12 x 3/8 x 800 mm 1 pc.
- Hose ø 12 x 3/8 x 850 mm 1 pc.
- Hose ø 12 x 3/8 x 900 mm 1 pc.
- Hose ø 3/8 x 3/8 x 1250 mm 1pc.



DL-2UMS004

- Set of 7 hoses for various connections. The set includes:
- Universal hose Ø 8 x 3/8 x 1000 mm 3 pcs.
- Universal hose Ø 10 x 3/8 x 1000 mm 4 pcs.



STANDS and EQUIPMENT for testing common rail injectors and pumps

CR-Test2P

STAND EQUIPMENT

Connection set

DL-KUK0040



Kit includes :

- Conical fitting 3/8 "x10 mm 4 pcs.;
- Taper fitting 3/8"x8 mm 3 pcs.;
- Clamp Ø15 7 pcs.;
- Clamp Ø10 7 pcs.;
- Banjo fitting Ø16 mm x 10 mm 2 pcs.;
- Banjo fitting Ø14 mm x 10 mm 2 pcs.;
- Banjo fitting Ø12 mm x 8 mm 2 pcs.;
- Bolt Banjo M16 2 pcs.;
- Bolt Banjo M14 2 pcs.;
- Bolt Banjo M12 6 pcs.;
- Gasket Ø12 mm 16 pcs.;
- Gasket Ø14 mm 12 pcs.;
- Gasket Ø16 mm 12 pcs.;
- Gasket Ø21 mm (1/2") 1 pc.;
- Plastic fitting for VDO pumps (Siemens) 1 pc.
- Fitting 1/2"x3/8" 1 pc.;
- Fitting M16x1.5x3/8" 1 pc.
- Adapter M12xM16 (pitch 1.5 mm) 4 pcs.
- Adapter M12xM14 (pitch 1.5 mm) 4 pcs.
- Adapter M12xM12vn (pitch 1.5 mm) 4 pcs.



ADDITIONAL EQUIPMENT FOR STANDS



DL-USN0021

Universal cradle for CR pumps

Contents of delivery:

- Rotary stand 1 pc.
- Flange kit for mounting CR pumps, 6 pcs.
- Set of 4 pump support plates.





ADDITIONAL EQUIPMENT FOR STANDS



DL-ORV2

Cooling stand of radiator-fan type.

External heat exchangers are designed for additional temperature adjustment test liquid. They can be connected to various flows with pressure up to 0.4 MPa.

- Number of radiators: 2
- Connection fitting: M14x1.5
- Supply voltage: ~220V50Hz
- Power consumption: 20W (0.23A; 0.5A max)
- Dimensions : width 500, height 770, depth 370 (mm)
- Total weight: net ~24kg, gross ~30kg



DL-MSP

Mobile oil station for stands

- Operating pressure 0-10 bar
- Capacity at 3 bar -150 liters / hour
- Fine filter 10 µm
- Tank 20 liters
- Power supply 380 V 50 Hz
- Power consumption 0.37 kW
- Dimensions: width 300, height 800, depth 420 (mm)
- Total weight: net ~54kg, gross ~60kg



ADDITIONAL EQUIPMENT FOR STANDS



DL-SRS020

Calibration fluid SRS

ISO 4113-CV-AW (VS 15665-OL-CV), canister 20 liters.

Used in test benches for testing of CR injectors, unit injectors PLD sections.

Produced in Germany.



DL-SRS200

Calibration fluid SRS

ISO 4113-CV-AW (VS 15665-OL-CV), Barrel 200 liters.

Used in test benches for testing of CR injectors, unit injectors PLD sections.

Produced in Germany.



ADDITIONAL EQUIPMENT AND ACCESSORIES FOR STANDS



DL-TVD-S

High Pressure Tube 1000 x 14 x 14 mm 1800 bar



DL-TVD–K

High Pressure Tube 1000 x 14 x 14 mm 2500 bar

DL-TVD-G

High Pressure Tube 600 x 14 x 14mm 2500Bar



DL-TVD

High Pressure Tube for stands and rigs:

TVD31212 (300x12x12), TVD31214 (300x12x14), TVD31414 (300x14x14), TVD41212 (400x12x12), TVD41214 (400x12x14), TVD41414 (400x14x14), TVD51214 (500x12x14), TVD51414 (500x14x14), TVD61212 (600x12x12), TVD61214 (600x12x14), TVD61414 (600x14x14)



DL-CR14P2000

Pressure gauge 2000 bar



DL-CR50015

Sensor for coding




ADDITIONAL EQUIPMENT AND ACCESSORIES FOR STANDS





ADDITIONAL EQUIPMENT AND ACCESSORIES FOR STANDS TRIUMF, CRUIS , CR-TEST-4E AND CR-JET-4EM

Re-equipment of stands CRUIS, TRIUMF, CR-Jet for electric motors 5.5 kW

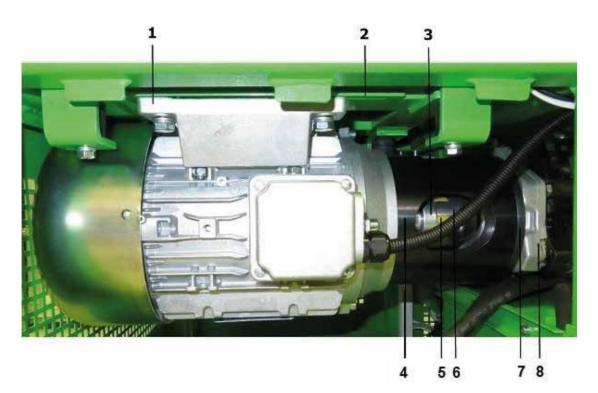

1.	DL-EDF0055	Electric motor flange 5.5 kW
2.	DL-UNI50277	Motor Mounting Bracket
	DL-UNI31521	5.5 kW for TRIUMF, CR-Jet stands Motor Mounting Bracket
		5.5 kW for CRUIS stand
3.	DL-UNI31444	Coupling for the engine for injection pump 0445020139, 0445020088
	DL-UNI31502	Coupling on the engine for injection pump 0445020078, 0445020119
4.	DL-UNI31449	Clip for fastening the injection pump to the electric motor
5.	DL-MUP0060	Compensatory polyurethane insert
6.	DL-UNI31443	Coupling for injection pump 0445020139
	DL-UNI31520	Coupling for injection pump 0445020119
7.	DL-UNI31459	Flange for injection pump 0445020078 (119,175,105)
8.	ТНВД 020139	High pressure fuel pump
		Bosch 0445020139



ADDITIONAL EQUIPMENT AND ACCESSORIES FOR STANDS TRIUMF, CRUIS , CR-TEST-4E AND CR-JET-4EM







Electric motor flange 5.5 kW

DL-UNI50277

Electric motor mounting bracket 5.5kW for stands TRIUMF, CR-Jet

DL-UNI31521 Motor mounting bracket 5.5 kW for stands CRUISE

DL-UNI31444Coupling for the engine for injection pump 0445020139, 0445020088DL-UNI31502Coupling on the engine for injection pump 0445020078, 0445020119



DL-UNI31449 Clip for fastening the injection pump to the electric motor

DL-MUP0060 Compensatory polyurethane insert

Ē



dieselland

DL-UNI31443

Coupling for injection pump 0445020139

DL-UNI31520 Coupling for injection pump 0445020119

DL-UNI31459 Flange for injection pump 0445020078 (119,175,105)

ТНВД 020139 High pressure fuel pump BOSCH 0445020139

MODERNIZATION KIT FOR CR-JET-4E STANDS. INSTALLING THE CASCADE PROGRAM

DL-KMS-JET List of modernization components:

- Electronic part / set of mounting materials
- Delphi piezo transducer for Cascade software
- Personal Computer / PC Installation Accessories
- Frequency converter / Drive control software / Mounting kit
- Vacuum system / Mounting kit
- Mounting elements for inverter and vacuum pump
- Vacuum adjustment unit / Mounting kit
- Vacuum control unit
- Bench retrofit up to 2400 bar / hydraulic kit



The Cascade software has a user-friendly interface. The program contains built-in test plans for testing and coding Bosch, Delphi, Denso, Siemens (VDO) injectors. The functions of creating new test plans, editing built-in ones, as well as creating targets for Delphi C2i, C3i, C4i injectors are available. The results and progress of testing are displayed in graphical form and saved to a file and sent to print.

Cascade software allows coding BOSCH isa / ima cod, Delphi C2i / C3i / C4i*, Denso, VDO Siemens injectors.

Stand working pressure up to 2400 bar.

* coding Delphi C4i in the configuration of the stand 5.5 kW 380 V



PUMP TEST.02

Common-Rail High Pressure Pump Testing Equipment



PUMP TEST .02

The kit includes:

1. The **PTC-2520** device is designed to provide user-programmable control signals to Common Rail injection pump pressure regulators to test their performance.

2. Device **FMDE-520**, designed to measure the performance of the Common Rail injection pump in two channels.

- 3. Tool rack on wheels for easy operation.
- 4. A set of adapter cables.
- 5. Liquid fine filters (2 pcs.)
- 6. Software.









		-	1	
	 - merete			
No. 1986	and the second		1.	
a section of	in the block			
			1000	0.020








CR-TESTER . CRT-5040


4-channel device for testing and testing Common Rail injectors Bosch, Denso, Delphi, Siemens VDO with a set of cables.

The device has the ability to connect to the FLAGMAN-FLOW beakerless measuring system with the ability to generate correction codes for Delphi C2i / C3i, BOSCH, DENSO injectors

At the CR-TESTER device. CRT-5040 has the functions of controlling the curtain of the metering unit, stopping the high-pressure pump, measuring and controlling the temperature in the tank, measuring the temperature of the back-tested injectors, measuring the injection start time, etc.

Computer control of the set through the CASCADE software.

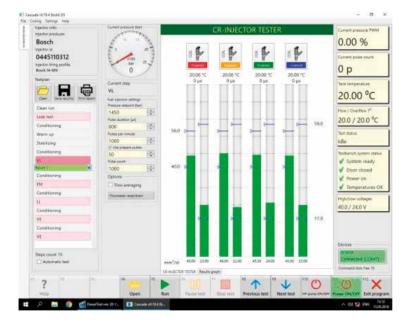





1

STANDS and EQUIPMENT for testing common rail injectors and pumps



FLAGMAN-FLOW

CR injector dosage measuring unit, 8-channel for CR-TESTER device. CRT-5040

Computer control of the set through the CASCADE software.

FLAGMAN-FULL

CR injector test kit

The FLAGMAN-FULL complex is intended for testing CommonRail injectors manufactured by Bosch, Denso, Delphi, Siemens VDO at the stand.

The measurement takes place in an 8-channel FLAGMAN-FLOW system without a beaker. There is a possibility of retrofitting with a hardware-software complex for coding injectors.

Computer control of the set through the CASCADE software.





FLAGMAN-CODE (FLAGMAN-CODE-L)

CR injector test kit

The FLAGMAN-CODE complex is designed to test common rail injectors manufactured by Bosch, Denso, Delphi, Siemens VDO at the stand.

The measurement takes place in the 8-channel FLAGMAN-FLOW system without beakers. The complex consists of a FLAGMAN-FLOW measuring unit and a CR-TESTER controller. CRT-5040. The complex is also equipped with a vacuum system for coding Deiphi C2i, C3i injectors. Computer control of the set through the CASCADE software.

The FLAGMAN-CODE-L kit is equipped with equipment for installing injectors on a test bench.

DL-CR50015

Sensor for coding



FLAGMAN-CODE

CR injector test kit

The FLAGMAN-FULL complex is intended for testing CommonRail injectors manufactured by Bosch, Denso, Delphi, Siemens VDO at the stand.

The measurement takes place in an 8-channel beakerless FLAGMAN-FLOW system. The complex consists of a FLAGMAN-FLOW measuring unit and a CR-TESTER controller. CRT-5040. The complex is also equipped with a vacuum system for coding Deiphi C2i, C3i injectors. Computer control of the set through the CASCADE software.

Kit of delivery FLAGMAN-CODE



DL-CR50015

Sensor for coding

Measurement unit without bea	ker FLAGMAN-FLOW	1 pc	
Controller CR-TESTER. CRT-	Controller CR-TESTER. CRT-5040		
Vacuum system		1 set	
Software		1 pc	
Passport (technical description	n, instruction manual)	1 pc	
Set of connecting cables for FL and CR-TESTER controller. Cl	_AGMAN-FLOW measuring unit RT-5040	1 set	
Extension cord for injector cab	les: "Injector" socket -1.5m	1 pc	
Adapter cable for injectors		1 set	
Adapter cable for high pressure regulators			
Adapter cable for low pressure regulators			
Adapter cable for pressure sensor			
Power cable 220 V			
Connectors for self-manufacturing of cables into sockets: "Protection", "TanktC", "RegtC", "Cycle", "Pump", "Invertor", "Rpm"			
Temperature sensor for monitoring	g the temperature of the liquid in the tank: "TanktC" socket	1 pc	
Temperature sensors for meas	suring the temperature of the TJ backflow	4 pcs	
Reed switch for connecting a protective screen: "Protection" socket			
Fuse 3A			
Connecting pipelines			
DL-CR50015 Injection start	measuring sensor (for coding)	1 pc	





FLAGMAN-CODE-L

CR injector test kit

The FLAGMAN-FULL complex is intended for testing common rail injectors manufactured by Bosch, Denso, Delphi, Siemens VDO at the stand.

The measurement takes place in an 8-channel beakerless FLAGMAN-FLOW system. The complex consists of a FLAGMAN-FLOW measuring unit and a CR-TESTER controller. CRT-5040. The complex is also equipped with a vacuum system for coding Deiphi C2i, C3i injectors. Computer control of the set through the CASCADE software.

Kit of delivery FLAGMAN-CODE-L



DL-CR50015

Sensor for coding

Measurement unit without beaker FLAGMAN-FLOW				
Controller CR-TESTER. CRT-5040				
Vacuum system	Vacuum system			
Software	Software			
Passport (techr	nical description, instruction manual)	1 pc		
	ng cables for FLAGMAN-FLOW measuring unit R controller. CRT-5040	1 set		
Extension cord	for injector cables: "Injector" socket -1.5m	1 pc		
Adapter cable f	or injectors	1 set		
Adapter cable f	or high pressure regulators	1 pc		
Adapter cable f	or low pressure regulators	1 pc		
Adapter cable for pressure sensor				
Power cable 220 V				
Connectors for self-manufacturing of cables into sockets: "Protection", "TanktC", "RegtC", "Cycle", "Pump", "Invertor", "Rpm"				
Temperature set	nsor for monitoring the temperature of the liquid in the tank: "TanktC" socket	1 pc		
Temperature se	ensors for measuring the temperature of the TJ backflow	4 pcs		
Reed switch for	connecting a protective screen: "Protection" socket	1 pc		
Fuse 3A				
Connecting pipelines				
DL-CR50015	Injection start measuring sensor (for coding)	1 pc		
DL-CR10015	Nozzle holder frame	1 pc		
DL-CR10025	Injector holder bracket assembly	1 pc		
DL-CR10006	Protective glass (6mm) or DL-CR10010 Protective glass (10mm)	1 pc		





DL-DIN00810

Plunger part of the measuring sensor (without solenoid valve)

Suitable for stand mounting:

- TRIUMF
- CRUISCR-Test-4E
- FLAGMAN-FLOW
 - FLAGMAN-FULL
- CR-JetCR-iXe
- FLAGMAN-CODE
- FLAGMAN-CODE-L



D-BUR00101

Solenoid valve Burkert 3-way 24V with rail mounting



D-BUR00102

solenoid valve Burkert 3 way 24V



D-BUR00103

Solenoid valve Burkert 2-way 24V





D-010094

Repair kit Electromagnetic core Burkert valve



DL-LSF-45L0-M1

Liquid flow measuring sensor. Installed on a two-channel liquid flow meter FMDE-520 and FMDE-500



DL-LSN(F)45L0-M2

Repair kit for liquid measuring sensor **DL-LSF-45L0-M1**

The kit includes:

• Measuring gear - 2 pcs.

• Sealing ring -1pc.

Flow Ranges (Accuracy: ±1%)

Viscosity Meter Size	Water	0.3mPa · s to less than 0.8mPa · s	0.8mPa · s to less than 2.0mPa · s	2.0mPa · s to less than 5.0mPa · s		5.0mPa·s to less than 1000mPa·s	Rotor Material
45		10.0 to 500	7.0 to 500	4.0 to 500		2.5 to 500	Special resin
45		25.0 to 500	15.0 to 500	7.0 to 500	3.5 to 500		Stainless steel



Unit in L/h





CR-Active

The **CR-Active** signal activator is designed to supply a control signal to the solenoid valve of Common-Rail injectors with a set of cables. It is used to measure the valve stroke when measuring the magnetic gap of electromagnetic Common-Rail injectors.

It has two delivery options: basic and complete. In addition to the signal activator and a set of cables, the complete set includes a stand for injectors, a set of measuring probes and adapters, and a measuring indicator head



CR-NeXT

Armature activator device for Common-Rail injector solenoid valve. The **CR-NeXT** device is designed to supply a control signal to the solenoid valve of Common-Rail injectors. It is mainly used to measure the valve stroke when measuring the magnetic gap of common-rail solenoid injectors.

MONICA CTV-08

The device **"MONICA"** CTV-08 for measuring the actuation current of the electromagnet of Common Rail type injectors

In its case, the device has 2 connectors for connecting a signal cable and a power cable. The measurement takes place by pressing the "Enter" button, after the flashing dot appears on the display, the device is ready for a new measurement. It is also possible to reset the measurement by pressing the "Reset" button



PTC-2520 CP TESTER

Device for testing and testing high-pressure fuel pumps of the Common Rail system with a set of cables.



FMDE-520

Device for testing the performance of fuel pumps of the Common Rail system of various manufacturers: Bosch, Delphi, Denso, Siemens, Cummins on a test bench.

It is a 2-channel liquid flow meter (pump supply and return discharge) in various modes, with digital information output to a backlit liquid crystal display.



CRISTINA

The **CRistina** complex is designed for assembling injectors of the COMMON RAIL BOSCH, DELPHI, DENSO systems using a technology that allows you to calculate and select all the necessary adjusting elements.

CRistina repair- and testing complex is dedicated to assembing and disassembling Bosch, Denso and Delphi Common Rail inejctors according to manufacturer specified steps and mechanical tolerances. The complex offers the ability to measure relevant mechanical tolerances of the injector parts and electrical characteristics of the electromagnet. The assembly/disasembly steps and critical measurement points are presented by convenient step-by-step instructions descriptions and relevant images of the work process itself.









CRistina-PIEZO

Device for testing piezo injectors and piezo element.

Features of the device:

- Feeding signal to activate the injector on the hand press
- Measuring the resistance of a piezo
- Measuring the capacity of the piezo
- Measurement function of the smooth running of the piezo



1. 2.



PR-TESTER.V05

DL-UNI20061

Electronic pressure gauge 2 channel

Delivery set for measurement pressure on 2 CHANNELS:

DL-UNI20065

Electronic pressure gauge

DL-UNI20071main adapter cablefor 2-channel connection - 1 pc.

- 3. **DL-UNI20072** adapter cable for pressure sensor BOSCH 1 type 2 pcs.
- 4. **DL-UNI20073** adapter cable for pressure sensor BOSCH 2 type 2 pcs.
- 5. **DL-UNI20074** adapter cable for pressure sensor DELPHI 2 pcs.
- 6. **DL-UNI20075** adapter cable universal for pressure sensor 2 pcs.
- 7. Charger
- 8. Passport



PR-TESTER.V05

PR-TESTER.V05

Electronic pressure gauge 2 channel

DL-UNI20060

2.

Delivery set for measurement pressure on 1 CHANNEL:

- 1. **DL-UNI20065** Electronic pressure gauge
 - **DL-UNI20070** main adapter cable for single-channel connection 1 pc.
- 3. **DL-UNI20072** adapter cable for pressure sensor BOSCH 1 type 1 pc.
- 4. **DL-UNI20073** adapter cable for pressure sensor BOSCH 2 type 1 pc.
- 5. **DL-UNI20074** adapter cable for pressure sensor DELPHI 1 pc.
- 6. **DL-UNI20075** adapter cable universal for pressure sensor 1 pcs.
- 7. Charger
- 8. Passport









Electronic pressure gauge included with charger



DL-UNI20077

adapter cable for pressure sensor BOSCH 1500 bar

DL-UNI30237



DL-UNI21030

mounting bracket electronic manometer





DL-CR10058 DL-CR10059

with nut M12 x 1.25 mm

Pressure gauge leg (fitting) G1/2

DL-CR10060



Manometer leg (fitting) M20 x 1.5mm with nut M12 x 1.25 mm

Pressure sensor 1500 bar

DL-UNI20065 PR-TESTER.V05

Electronic pressure gauge suitable for manual presses:



DL-RP420 (without pressure sensor)

DL-RP425 (with pressure sensor 1500 bar)

Hand press RP 400 for injector testing with electronic pressure gauge DL-UNI20065

Contents of delivery:

- mechanical press 1 pc. connecting tube 2 pcs.
- electronic pressure gauge with cable 1 pc.
- battery charger 1 pc.
- pressure sensor (for RP 425) for 1500 bar 1 pc.

DL-RP520	(without pressure sensor)
DL-RP525	(with pressure sensor 1500 bar)

ZECA hand press for injector testing with electronic pressure gauge DL-UNI20065

Contents of delivery:

- \bullet mechanical press 1 pc. \bullet connecting tube – 2 pcs.
- electronic pressure gauge with cable 1 pc.
- battery charger 1 pc.
- pressure sensor (for RP 525) for 1500 bar 1 pc.



BASIC KITS FOR CR NOZZLE TESTING

WITH THE HELP OF A MEASURING BLOCK. FROM POSSIBILITY OF CONNECTING TO ELECTRONIC MEASURING FLAGMAN-MUFI-CR UNIT AND CODING RETROFIT FLAGMAN CODE.



DL-CR10030

A set of basic equipment for testing CR injectors with a controller CR-TESTER CRT-5040 and High pressure fuel pump Basic equipment kit designed to test Common Rail injectors various manufacturers (Bosch, Denso, Delphi, VDO (Siemens) Cummins, Caterpillar, AZPI.

1. DL-CR10031

Basic equipment kit for testing CR injectors with controller CR-TESTER CRT-5040 without injection pump kit CP3 **DL-CR00088**

2. DL-CR10020

Basic kit for testing CR injectors without controller CR-TESTER CRT-5040

3. DL-CR10021

Basic kit for testing CR injectors without controller CR-TESTER CRT-5040 and injection pump CP3 **DL-CR00088**

The DL-CR10030 set is completed with a DL-CR00088 injection pump with a working pressure of 1800 bar.

DL-CR00139


The injection pump kit **DL-CR00139** is used with a working pressure of 2400 bar and is supplied by separate order. Also, when installing **DL-CR00139** in the basic equipment kit, it is necessary to replace the sensor and pressure regulator for 2400 Bar and 2200 Bar, respectively.



BASIC KITS FOR CR NOZZLE TESTING

DL-CR10030 Basic equipment kit for testing CR injectors with controller CR-tester CRT-5040 and injection pump. The basic equipment kit is designed to test CommonRail injectors from various manufacturers (Bosch, Denso, Delphi, VDO (Siemens) Cummins, Caterpillar, AZPI.

The injection pump kit **DL-CR00139** is used for operating pressures of 2400 bar or 2200 bar and is available upon separate order. When installing DL-CR00139 in the basic equipment kit, it is necessary to replace the sensor and pressure regulator with 2400 bar or 2200 bar, respectively.

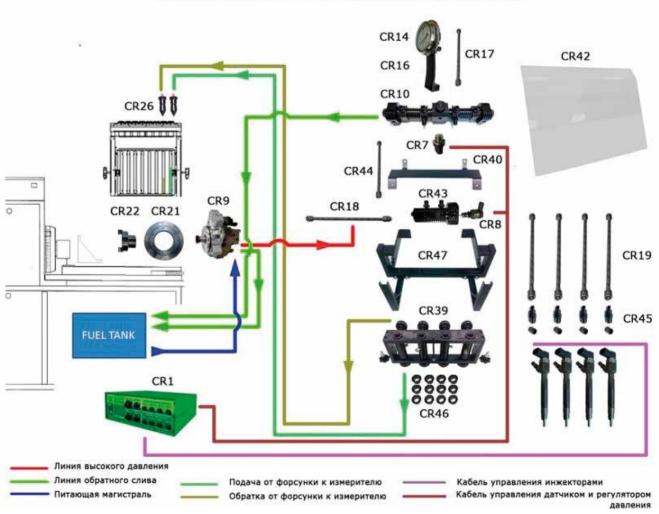

Принципиальная схема установки комплекта базовой оснастки



DL-CR10030

EQUIPMENT KIT FOR TESTING CR INJECTORS

CR1	Common Rail Injector Test Controller	CRT-5040	1 pc
	Pressure sensor 1800 bar	DL-CR10050	1 pc
CR7	*Pressure sensor 2200 bar	DL-CR10052	1 pc
	*Pressure sensor 2400 bar	DL-CR10053	1 pc
	Pressure regulator 1800 bar	DL-CR10051	1 pc
CR8	*Pressure regulator 2200 bar	DL-CR10054	1 pc
	*Pressure regulator 2700 bar	DL-CR10055	1 pc
CR43	Rail pressure accumulator small	DL-CR30180	1 pc
CR10	Rail pressure accumulator for 2 regulators	DL-CR30181	1 pc
CR43	*Rail pressure accumulator for 2 regulators with cooling	DL-CR30188	1 pc
CR32	*Safety valve for pressure accumulator 1800 bar	DL-CR10056	1 pc
CR32	*Safety valve for pressure accumulator 2400 bar	DL-CR10057	1 pc
CR30	Plug M14 cap	DL-UNI50271	4 pcs
CR19	High pressure pipes M14 x 14 x 400 mm / M12 x 14 x 400 mm for injectors	DL-TVD41414 DL-TVD41214	4 pcs
CR17	High pressure tube M14 x 14 x 300 mm for pressure gauge	DL-TVD31414	1 pc
CR44	High pressure tube M14 x 14 x 300 mm for rail connection	DL-TVD31414	1 pc
CR45	Adapter from M14 to M12 / M12 to M12	DL-UNI50083 DL-UNI50087	4 pcs
CR39	Nozzle holder frame	DL-CR10015	4 pcs
CR46	Bushing set DL-UNI31019 -Ø 17 (4pcs); DL-UNI31020 -Ø 18.9 (1pc); DL-UNI31021 -Ø 19.2 (1pc); DL-UNI31022 -Ø21 (1pc) and DL- UNI31231 -Ø21.4(1pc)	DL-UNI50161	1 set
CR24	Beaker - Clamp for 9mm atomizers	DL-UNI30997	2 pcs
CR47	Bracket - injector frame holder	DL-CR10025	1 pc
CR29	Tube TEFLON for connection of injectors to dia. 6 mm	P1004	16 m
CR31	Plug instead of pressure regulator	DL-UNI30497	2 pcs
CR32	Plug instead of safety valve	DL-CR30493	1 pc
CR36	Backflow connection kit DENSO banjo fitting, bolt M8 x 1 mm, copper washers 2 pcs.	DL-CR20060	4 sets



CR38	Return fitting for "rail" (banjo 12 mm + M12 bolt + rubber-metal washers)	DL-CR20062	2 sets		
CR35	A set of fittings for measuring the return flow of fuel from the injectors	DL-24CRM	1 set		
CR40	Bracket-holder "rail" on the frame	DL-CR10028	1 pc		
CR41	Mounting kit for rail and frame	DL-CR20063	1 set		
CR42	Protective cover (plexiglass) + 2 brackets-holders	DL-CR10006	1 pc		
CR26	Defoamers	DL-UNI30156	8 pcs		
CR28	Quick connect adapters for defoamers	34-RL310602	8 pcs		
CR14	Pressure gauge 0-2500 bar	DL-CR14P2500	1 pc		
CR15	Adapter 1/2" X M14 (for pressure gauge)	DL-UNI30287	1 pc		
CR16	Pressure gauge holder	DL-KM2500	1 pc		
Set of equipment injection pump CP3 DL-CR00088 1800 bar					
CR9	High pressure fuel pump SR-3 1800 bar	DL-CR10088	1 pc		
CR18	High pressure pipe M14 X 14 X 400 mm for injection pump	DL-TVD51414	1 pc		
CR21	Pump bracket adapter (diameter 107 mm)	DL-UNI30428	1 pc		
CR22	Coupling for connecting the pump to the drive	DL-M24/DL-M19	1 pc		
CR34	Rubber hose dia.8 mm for fuel supply to the pump	D-18-806-008	2,4 m		
CR38	Fitting (banjo 12 mm + M12 bolt + rubber-metal washers) for injection pump	DL-CR20062	1 set		
_	Clamps 13 mm for rubber hoses Φ 8 mm	DL-CR20066	4 pcs		
_	Conical fitting M12x1.5, for a hose with a diameter of 8 mm	DL-UNI30112	3 pcs		
_	Washer, rubber-metal, M12	D-GM1537AN	5 pcs		
	*Set of equipment injection pump CP3 DL-CR00139 2400 bar				
CR9	High pressure fuel pump SR-3 2400 bar	DL-CR10139	1 nc		

CR9	High pressure fuel pump SR-3 2400 bar	DL-CR10139	1 pc
CR18	High pressure pipe M14 X 14 X 400 mm for injection pump	DL-TVD51414	1 pc
CR21	Pump bracket adapter (diameter 107 mm)	DL-UNI30428	1 pc
CR22	Coupling for connecting the pump to the drive	DL-M24	1 pc
CR34	Rubber hose dia.8 mm for fuel supply to the pump	D-18-806-008	2 m
CR38	Fitting (banjo 12 mm + M12 bolt + rubber-metal washers) for injection pump	DL-CR20062	2 sets
—	Clamps 13 mm for rubber hoses Φ 8 mm	DL-CR20066	4 pcs
—	Conical fitting M12x1.5, for a hose with a diameter of 8 mm	DL-UNI30112	3 pcs
—	Washer, rubber-metal, M12	D-GM1537AN	5 pcs

* for additional order



1

STANDS and EQUIPMENT for testing common rail injectors and pumps

CR INJECTOR TEST KITS





DL-CR10000

Basic set of equipment CR with CR-Tester and with high pressure fuel pump CP-3

DL-CR10001

CR tool kit (without pump, without CR-Tester)

DL-C4-CODE

Software for CR-Tester with test-BOSCH injector plans

DL-CR10000 BASIC EQUIPMENT KIT COMMON RAIL

Electronic part:

CR1	Signal simulator 4-channel CR-Tester	1 pc
CR2	Cable kit (basic)	1 pc
CR3	Connector-adapter (male) for connecting injectors "on the thread"	1 pc
CR4	Connector-adapter for connecting Delphi injectors	1 pc
CR5	Connector-adapter for connecting MB injectors	1 pc
CR6	Connector-adapter for connecting BMW injectors	1 pc
CR7	Pressure sensor (0281002921 -1800 bar)	1 pc
CR8	Pressure regulator (0281002494)	1 pc



Mechanical part:

CR9	injection pump (CP3) BOSCH	1 pc
CR10	"Rail" for 4 nozzles on 2 RD	1 pc
CR11	Fitting for "Rail" M14xM14 in a set with gaskets	5 pcs
CR12	Fitting for "Rail" M14xM12(M14) in a set with gaskets	1 pc
CR14	Pressure gauge 0-2500 bar D-CR14P2500	1 pc
CR15	Pressure gauge adapter	1 pc
CR16	Pressure gauge holder	1 pc
CR17	High pressure pipes M14 x M12 (M14) x 300 mm for pressure gauge	1 pc
CR18	High pressure pipes M12 x M12 (M14) x 300 mm for injection pump	1 pc
CR19	High pressure pipes M14XM14 x300mm for injectors	4 pcs
CR20	Straight adapter from M14 to M12 for high pressure tube	4 pcs
CR21	Adapter for mounting the pump on a bracket (Ø107mm.)	1 pc
CR22	Coupling for connecting the pump to the drive	1 pc
CR23	BOSCH-DENSO injector adapter	4 pcs
CR24	Adapter-glass for installing DELPHI injectors	4 pcs
CR25	Clamp (collet) for injector nozzles 7mm	4 pcs
CR26	Defoamers	8 pcs
CR27	1/8" adapters for quick connection (Ø 6mm angled)	4 pcs
CR28	1/4" adapters for quick connection (Ø 6mm) straight	8 pcs
CR29	PVC spout Ø 6 mm	16 m
CR30	Plug M14 for "Rail"	4 pcs
CR31	Plug instead of RD	1 pc
CR32	Plug instead of safety valve	1 pc
CR33	Plug M12 instead of return fitting "Rail"	1 pc
CR34	PVC hose 8mm for fuel supply to the pump	1,5 m
CR35	BOSCH injector return fitting	4 pcs
CR36	DENSO injector return fitting	4 pcs
CR37	"Bolts" for DENSO injector return fittings	4 pcs
CR38	Return fitting for "Rail" (banjo12mm + bolt M12 + washers)	2 sets
CR39	Nozzle holder frame	1 pc
CR40	Rail bracket on frame	1 pc
CR41	Mounting kit for "Rail" and frame	1 pc
CR42	Protective cover	1 set





DL-12CRM

Reverse flask set draining CR injectors



DL-24CRM

Set of flasks with measuring adapters return flow of CR injectors



DL-36CRM

Connection adapter set return flow of CR injectors



DL-80CRM

Set of connections for measuring the fuel backflow from Common Rail injectors



Kit includes :

1	DL-6015168	Fitting for injectors FORD (Siemens VDO)	4 pcs
2	DL-6015188	Fitting for FORD Transit (Siemens VDO)	4 pcs
3	DL-60151111	Fitting for injectors BOSCH Piezo	4 pcs
4	DL-6015166	Fitting for SIEMENS VDO injectors	4 pcs
5	DL-GSDE	L-shaped fitting with bracket for Denso injectors	4 pcs
6	DL-OCDE	Banjo fitting for Denso injectors	4 pcs
7	DL-6015195	Fitting for DELPHI injectors	4 pcs
8	DL-6015176	Fitting for injectors 0445110368 (BOSCH)	4 pcs
9	DL-6015130	DELPH injector fitting	4 pcs
10	DL-6015161	Fitting for SIEMENS injectors	4 pcs
11	DL-KLB01	Fitting with bracket for BOSCH injectors	4 pcs
12	DL-SMS01	Clamp long for clamping SIEMENS fitting	4 pcs
13	DL-SMS02	Medium bracket for clamping the SIEMENS fitting	4 pcs
14	DL-SMS03	Bracket standard for clamping the SIEMENS fitting	4 pcs



1

STANDS and EQUIPMENT for testing common rail injectors and pumps



DL-6015168

Nozzle fitting FORD (Siemens VDO)



(7)

DL-GSDE

Fitting L-shaped with bracket for injectors Denso



DL-6015188

Nozzle fitting FORD Transit (Siemens VDO)



DL-OCDE

Banjo fitting for Denso injectors

10



DL-60151111

Nozzle fitting BOSCH Piezo



DL-6015195 Nozzle fitting DELPHI



DL-6015166

Nozzle fitting SIEMENS VDO



DL-6015176

Nozzle fitting 0445110368 (BOSCH)



¹¹

DL-KLB01

Union with clamp for Bosch injectors



12

DL-SMS01

Bracket long for fitting clamp SIEMENS



DL-6015130 Nozzle fitting DELPHI



DL-SMS02

Bracket medium for fitting clamp SIEMENS





Nozzle fitting

SIEMENS

DL-6015161

DL-SMS03

Bracket standard for fitting clamp SIEMENS

DL-90CRM

Set of connections for measuring the fuel backflow from Common Rail injectors



Kit includes :

1	DL-6015168	Fitting for injectors FORD (Siemens VDO)	4 pcs
2	DL-6015188	Fitting for FORD Transit (Siemens VDO)	4 pcs
3	DL-60151111	Fitting for injectors BOSCH Piezo	4 pcs
4	DL-6015166	Fitting for SIEMENS VDO injectors	4 pcs
5	DL-GSDE	L-shaped fitting with bracket for Denso injectors	4 pcs
6	DL-OCDE	Banjo fitting for Denso injectors	4 pcs
7	DL-6015195	Fitting for DELPHI injectors	4 pcs
8	DL-6015176	Fitting for injectors 0445110368 (BOSCH)	4 pcs
9	DL-6015130	DELPH injector fitting	4 pcs
10	DL-6015161	Fitting for SIEMENS injectors	4 pcs
11	DL-KLB01	Fitting with bracket for BOSCH injectors	4 pcs
12	DL-6015181	Fitting for SIEMENS injectors	4 pcs
13	DL-6015193	Fitting for injectors 0445110550 (BOSCH)	4 pcs
14	DL-SMS01	Clamp long for clamping SIEMENS fitting	4 pcs
15	DL-SMS02	Medium bracket for clamping the SIEMENS fitting	4 pcs
16	DL-SMS03	Bracket standard for clamping the SIEMENS fitting	4 pcs



1

STANDS and EQUIPMENT for testing common rail injectors and pumps



DL-6015168

Nozzle fitting FORD (Siemens VDO)





DL-GSDE

Fitting L-shaped with bracket for injectors Denso



DL-6015130 Nozzle fitting DELPHI





DL-6015193







DL-6015188

Nozzle fittingFORD Transit (Siemens VDO)



DL-OCDE

Banjo fitting for Denso injectors



DL-6015161

Nozzle fitting SIEMENS



DL-SMS01

Bracket long for fitting clamp SIEMENS



DL-60151111

Nozzle fitting BOSCH Piezo



DL-6015195 Nozzle fitting DELPHI



DL-KLB01

Union with clamp for Bosch injectors



DL-SMS02

Bracket medium for fitting clamp SIEMENS



DL-6015166

Nozzle fitting SIEMENS VDO



DL-6015176

Nozzle fitting 0445110368 (BOSCH)



DL-6015181

Nozzle fitting SIEMENS

16



DL-SMS03

Bracket standard for fitting clamp SIEMENS

DL-100CRM

Set of connections for measuring the fuel backflow from Common Rail injectors



Kit includes :

1	DL-6015168	Fitting for injectors FORD (Siemens VDO)	4 pcs
2	DL-6015188	Fitting for FORD Transit (Siemens VDO)	4 pcs
3	DL-60151111	Fitting for injectors BOSCH Piezo	4 pcs
4	DL-6015166	Fitting for SIEMENS VDO injectors	4 pcs
5	DL-GSDE	L-shaped fitting with bracket for Denso injectors	4 pcs
6	DL-OCDE	Banjo fitting for Denso injectors	4 pcs
7	DL-6015195	Fitting for DELPHI injectors	4 pcs
8	DL-6015176	Fitting for injectors 0445110368 (BOSCH)	4 pcs
9	DL-6015130	DELPH injector fitting	4 pcs
10	DL-6015161	Fitting for SIEMENS injectors	4 pcs
11	DL-KLB01	Fitting with bracket for BOSCH injectors	4 pcs
12	DL-6015181	Fitting for SIEMENS injectors	4 pcs
13	DL-6015193	Fitting for injectors 0445110550 (BOSCH)	4 pcs
14	DL-CR31256	Fitting for injectors Denso M8 x 1mm	4 pcs
15	DL-CR31312	Fitting for injectors Denso M8 x 1.25mm	4 pcs
16	DL-CR31254	Fitting for Denso injectors	4 pcs
17	DL-CR31255	Fitting for Denso injectors	4 pcs
18	DL-SMS01	Clamp long for clamping SIEMENS fitting	4 pcs
19	DL-SMS02	Medium bracket for clamping the SIEMENS fitting	4 pcs
20	DL-SMS03	Bracket standard for clamping the SIEMENS fitting	4 pcs



6

11

16

STANDS and EQUIPMENT for testing common rail injectors and pumps

3

8



DL-6015168

Nozzle fitting FORD (Siemens VDO)



DL-6015188

Nozzle fitting FORD **BOSCH** Piezo Transit (Siemens VDO)



DL-60151111 Nozzle fitting

Δ

9

DL-6015166

Nozzle fitting SIEMENS VDO



DL-GSDE

Fitting L-shaped with bracket for injectors Denso

10



DL-OCDE Banjo fitting for Denso injectors

DL-KLB01

DL-CR31254

Nozzle fitting Denso

Union with clamp

for Bosch injectors



7

12

DL-6015195

Nozzle fitting DELPHI



DL-6015181

DL-CR31255

Nozzle fitting Denso

Nozzle fitting SIEMENS

17



DL-6015193

18

0445110550 (BOSCH)

DL-SMS01

Bracket long for

fitting clamp

SIEMENS



19

DL-CR31256

Nozzle fitting Denso M8 x 1mm

DL-SMS02

Bracket medium for

fitting clamp

SIEMENS



Nozzle fitting

DL-6015161

DL-CR31312

Nozzle fitting Denso M8 x 1,25mm



20

DL-SMS03

Bracket standard for fitting clamp SIEMENS





DL-6015130

Nozzle fitting DELPHI





DL-6015176



Nozzle fitting

Universal adapter for truck CR injectors (Bosch , Denso, Delphi Smart) for supply and backflow lines at angles of 0°, 4° and 13°

DL-CR50013



Kit includes :

DL-CR30219	Adapter housing
DL- CR50035	Holding bracket with fitting and fitting for backflow
DL- CR30419	Nozzle for backflow of CR Delphi Smart injectors
DL- CR30238	The fitting extended for connection of giving
DL- CR30225	Standard fitting for supply connection
DL- CR30661	Nozzle for backflow of injectors CR Bosch 0445120147,0445120098
DL- CR30269	A fitting with a fitting for backflow of injectors Delphi, Smart, Denso,
	Bosch 0445120147, 0445120098
D-27-200078	O-ring for backflow fitting (2pcs).
	Hex wrench 3mm.



Universal adapter repair kit Kit includes :

- D-27-026000
 Sealing rubber ring 1 pc.

 2.
 D-27-026210
 Sealing rubber ring 1 pc.
- 3. **D-27-200078** Sealing rubber ring 4 pcs.



EXAMPLES OF USING THE UNIVERSAL ADAPTER DL-CR50013





Installation in nozzle adapter Bosch 0445120218 with direct connection "0°".

Used:

- **DL-CR30219** Adapter body (wide shelf towards sprayer)
- DL-CR30225 Standard fitting for supply connection
- DL-CR50035 Holding bracket with fitting and fitting for backflow



Installation in nozzle adapter Bosch 0445120067 with approach angle "13°".

Used:

- DL-CR30219 Adapter body (wide shelf towards sprayer)
 - DL-CR30238 The fitting extended for connection of giving
- DL-CR50035 Holding bracket with fitting and fitting for backflow
- Allen key for fixing the swivel base of the adapter housing by 13°



EXAMPLES OF USING THE UNIVERSAL ADAPTER DL-CR50013



Installation in nozzle adapter Bosch 0445120147, 0445120098 with direct connection "0°".

Used:

- DL-CR30219 Adapter body (wide shelf towards sprayer)
- DL-CR30661 Backflow nozzle
- DL-CR30225 Standard fitting for supply connection
- DL-CR30269 Short fitting with backflow fitting





Installation in nozzle adapter Denso with approach angle "0°".

Used:

- **DL-CR30219** Adapter body (wide shelf towards sprayer)
 - **DL-CR30225** Standard fitting for supply connection
- DL-CR30269 Short fitting with backflow fitting



EXAMPLES OF USING THE UNIVERSAL ADAPTER DL-CR50013





Installation in nozzle adapter Delphi Smart with direct "0°" approach.

Used:

- DL-CR30219 Adapter body (wide shelf towards sprayer)
- DL-CR30225 Standard fitting for supply connection
- DL-CR30419 Nozzle for backflow of nozzles
- DL-CR30269 Short fitting with backflow fitting



Adapter for CR Denso truck injectors, incl. Volvo 21952974 for supply and return connection

DL-CR50140







Kit includes :

- 1. DL-CR31031 Adapter housing
- 2. DL-CR30225 Feed connector
- 3. **DL-CR50035** Holding bracket with fitting and fitting for backflow





ADAPTERS FOR TESTING CARGO INJECTORS



DL-01 (UIS31524)

Adapter for testing mechanical injectors sections PLD MB ACTROS and MB ATEGO

Contents of delivery: adapter - 1 pc, cola receiver (7mm) - 1 pc, side fitting - 1 pc, fitting - 1 pc, screw - 1 pc.



DL-02 (DL-CR31046)

Truck injector adapter Bosch 0445120098, 0445120147 MAN Ø 29mm

Contents of delivery: adapter - 1 pc, cola receiver (7mm) - 1 pc, side fitting - 1 pc, fitting - 2 pcs, screw - 1 pc.



DL-04A (DL-CR30848)

Adapter for truck injectors RENAULT Ø 32mm 0445120020, 0445120019, 0445120003, 0445120004

Contents of delivery: adapter - 1 pc, cola receiver (9mm) - 1 pc, side fitting - 1 pc, fitting - 2 pcs, screw - 1 pc.



DL-05N (DL-CR31048)

Truck injector adapter CUMMINSIS Be110/162kW; KAMAZ 11TS 150/133kW, 20TS 207kW, 25TS 207W 0445120123

Contents of delivery: adapter - 1 pc, cola receiver (7mm) - 1 pc, side fitting - 1 pc, fitting - 2 pcs, screw - 1 pc.



DL-06 (DL-CR31440)

Truck injector adapter DENSO Ø 27mm

Contents of delivery: adapter - 1 pc, cola receiver (7mm) - 1 pc, side fitting - 1 pc, fitting - 2 pcs, screw - 1 pc.



ADAPTERS FOR TESTING CARGO INJECTORS



DL-07 (DL-CR31044)

Truck injector adapter DENSO Ø 23.5mm

Contents of delivery: adapter - 1 pc, cola receiver (7mm) - 1 pc, side fitting with axial compression of the core without rotation - 1 pc, fitting - 2 pcs, screw - 1 pc.



DL-08 (DL-CR31045)

Truck injector adapter MAN Ø 26mm

Contents of delivery: adapter - 1 pc, cola receiver (7mm) - 1 pc, side fitting - 1 pc, fitting - 2 pcs, screw - 1 pc.



DL-09 (DL-CR31439)

Truck injector adapter MAN Ø 28mm (Volvo) 0445120044

Contents of delivery: adapter - 1 pc, cola receiver (7mm) - 1 pc, side fitting 1 pc, fitting 2 pcs, screw - 1 pc.



DL-010 (DL-CR31047)

Truck injector adapter CUMMINS 0445120121, 0445120125

Contents of delivery: adapter - 1 pc, cola receiver (7mm) - 1 pc, side fitting - 1 pc, fitting - 2 pcs, screw - 1 pc.



100

DL-011 (DL-CR30985)

Adapter for connecting the return flow of cargo injectors SIEMENS VDO FORD

Contents of delivery: adapter - 1 pc, cola receiver (7mm) - 1 pc, fitting - 2 pcs, screw - 1 pc.



ADAPTERS FOR TESTING CARGO INJECTORS







Truck injector adapter Bosch 0445120063

DL-012 (DL-CR30036)

Contents of delivery: adapter - 1 pc, cola receiver (7mm) - 1 pc, side fitting - 1 pc, fitting - 2 pcs, screw - 1 pc.

DL-013 (DL-CR30968)

Truck injector adapter Delphi Smart Contents of delivery: adapter - 1 pc, cola receiver (7mm) - 1 pc, side fitting with axial compression of the core without rotation - 1 pc, fitting - 2 pcs, screw - 1 pc.

DL-014 (DL-CR30038)

Adapter for connecting the return flow of cargo injectors Denso 24mm Contents of delivery: adapter - 1 pc, cola receiver (7mm) - 1 pc, fitting - 2 pcs, screw - 1 pc.



DL-015 (DL-CR30822)

Adapter for connecting the return flow of cargo injectors Denso 18.5mm Contents of delivery: adapter - 1 pc, cola receiver (7mm) - 1 pc, fitting - 2 pcs, screw - 1 pc.



DL-016 (DL-CR31486)

Adapter for connecting the return line of SCANIA 2/4 pin cargo injectors Contents of delivery: adapter - 1pc, cola receiver (9mm) - 1pc, fitting - 2 pcs, screw - 1 pc.




DL-017 (DL-UNI30037)

Adapter for connection of return to cargo injectors Bosch 0445120066 Contents of delivery: adapter - 1 pc, cola receiver (7mm) - 1 pc, fitting - 2 pcs, screw - 1 pc.



ADAPTERS FOR TESTING CARGO INJECTORS





nozzles Cursor 9 Contents of delivery: adapter - 1 pc, cola receiver (7mm) - 1 pc, fitting - 2 pcs, screw - 1 pc.





Adapter for connecting the return flow of trucks injectors Bosch MTU Contents of delivery: adapter - 1 pc, cola receiver (7mm) - 1 pc, fitting - 2 pcs, screw - 1 pc.



DL-020 (DL-CR30596)

Adapter for connecting the return flow of trucks injectors MB 4PIN Contents of delivery: adapter - 1 pc, cola receiver (7mm) - 1 pc, fitting - 2 pcs, screw - 1 pc.



DL-021 (DL-CR31565)

BOSCH injector test adapter CRIN3 0445124015 Contents of delivery: adapter - 1 pc, cola receiver (7mm) - 1 pc, fitting - 1 pc, screw - 1 pc.



DL-022 (DL-CR31566)

Truck injector test adapter Caterpillar 3809888 Contents of delivery: adapter - 1 pc, cola receiver (7mm) - 1 pc, side fitting with axial compression of the core without rotation - 1 pc. fitting - 2 pcs, screw - 1 pc.



102


DL-023 (DL-CR31567)

Truck injector test adapter Delphi Smart injector Mersedes Contents of delivery: adapter - 1 pc, cola receiver (7mm) - 1 pc, side fitting with axial compression of the core without rotation - 1 pc. fitting - 2 pcs, screw - 1 pc.



ADAPTERS FOR TESTING CARGO INJECTORS





Truck injector adapter Bosch 0445120178 YaMZ-530 Contents of delivery: adapter - 1 pc, cola receiver (7mm) - 1 pc, side fitting - 1 pc, fitting - 2 pcs, screw - 1 pc.





DL-031 (DL-CR31040)

Adapter for connecting backflow of injectors Bosch 0445120303 Contents of delivery: adapter - 1 pc, cola receiver (7mm) - 1 pc, fitting - 2 pcs, screw - 1 pc.

DL-032 (DL-CR31430)

Backflow connection adapter injectors Bosch 0445120134 Contents of delivery: adapter - 1 pc, cola receiver (7mm) - 1 pc, fitting - 2 pcs, screw - 1 pc.



DL-033 (DL-CR31479)

Adapter for connecting the return flow of trucks injector DENSO 7140 08S02953 33800-52000 Contents of delivery: adapter - 1 pc, cola receiver (7mm) - 1 pc, fitting - 2 pcs, screw - 1 pc.



DL-034 (DL-CR31538)

Nozzle Backflow Adapter DENSO 1211 11L1063 (095000-121) Contents of delivery: adapter - 1 pc, sealing rubber ring - 2 pcs. fitting - 1 pc, locking screw - 1 pc.



DL-035 (DL-CR31561)

Nozzle Backflow Adapter DENSO 2300/3100 07T00365 (5213417 Komatsu) Contents of delivery: adapter - 1 pc, cola receiver (7mm) - 1 pc, fitting - 2 pcs, screw - 1 pc.



ADAPTERS FOR TESTING CARGO INJECTORS

Delphi A9362187 Mercedes Actros Euro 6

adapter - 1 pc, cola receiver (7mm) - 1 pc,

adapter - 1 pc, clamp - 1 pc, bracket - 1 pc,

DL-036 (DL-CR31563)

Injector test adapter

Contents of delivery:

fitting - 1 pc, screw - 1 pc.

Adapter for testing 4-pin injectors MB Actros Contents of delivery:

DL-037 (DL-CR50304)

set of screws - 1 pc, fitting - 2 pcs.

DL-037KIT (DL-CR50304KIT)

форсунки MB Actros 0445120303

Комплект для проверки 4-х контактной

Adapter for fixing the 4-pin nozzle MB Actros - 1 pc.

Fitting with external threads G1/4 to G1/8-1 piece.

20mm x 150mm reverse drain hose for the stand - 1 pc.

Fitting quick-release adapter G1/4", type "dad" - 1 piece.








Contents of delivery:

• DL-037	
----------	--

- DL-SHL02037
- DL-ADS04020
- DL-UNI31616
- 34-GU11-21-0014
- DL-34-N3-213B
- D-GM1537AN
- •



Rubber-metal washer Ø12mm - 1 piece.


Fitting Ø 6mm x 1/8"- 1 piece.

Adapter cable with 2 connectors - 1 pc.





DL-CR30429 (DL-EA) Side fitting for cargo adapters



injectors 5296723 DENSO Contents of delivery: Adapter - 1 pc, cola receiver (7mm) - 1 pc, fitting (quick adapter) - 2 pcs, screw-"butterfly" - 1 pc.



DL-CR30972 Feed connector for weight adapter



DL-CR50303

Feed connector for weight adapter assembly (nipple + bushing + nut + copper washer)



EQUIPMENT FOR CHECKING PUMPS AND INJECTORS



DL-K7 (DL-CR30161)

Fuel jet catcher (cola receiver) for nozzle nozzles (nozzle on the nozzle) Ø7 mm Contents of delivery: cola receiver - 1 pc, fitting - 1 pc, fixing screw - 1 pc.



DL-K9 (DL-CR30505)

Fuel jet catcher (cola receiver) for nozzle nozzles (nozzle on the nozzle) Ø9 mm Contents of delivery: cola receiver - 1 pc, fitting - 1 pc, fixing screw - 1 pc.



DL-UNI30156 (DL-PG)

Defoamer Liquid

Contents of delivery: defoamer - 1 pc, fitting - 1 pc.



DL-MOK 6мм х 6мм

Quick coupling with return valve Connection holes Ø 6mm X 6mm



DL-CR10028 DL-KD (CR40)

Bracket for Rail DL-CR30181KIT, DL-CR30522KIT from CR accessories



DL-ASB (CR23)

Adapter cup for Bosch injectors to frame CR-equipment



DL-ASD (CR24)

Adapter cup for Delphi injectors to frame CR-equipment



DL-RF (CR39) Frame - nozzle holder





EQUIPMENT FOR CHECKING PUMPS AND INJECTORS



00000

DL-CR10015 DL-RFJ

Nozzle holder frame with cups for nozzles 7 mm and clamping sleeves

DL-UNI31019	inner Ø 17 mm – 4pcs
DL-UNI31020	inner Ø 18,9 mm – 1pc
DL-UNI31021	inner Ø 19,2 mm – 1pc
DL-UNI31022	inner Ø 21 mm – 1pc
DL-UNI31031	inner Ø 21,4 mm - 1pc

Set of split sleeves (basic) to install injectors

DL-UNI31019	inner Ø 17 mm
DL-UNI31020	inner Ø 18,9 mm
DL-UNI31021	inner Ø 19,2 mm
DL-UNI31022	inner Ø 21 mm
DL-UNI31031	inner Ø 21,4 mm

Attention! All bushings are also sold separately.

Split sleeve kit for nozzle settings

000

 DL-UNI31015
 inner Ø 24 mm

 DL-UNI31016
 inner Ø 25 mm

 DL-UNI31017
 inner Ø 26 mm

Attention! All bushings are also sold separately.





EQUIPMENT FOR CHECKING PUMPS AND INJECTORS



DL-CR50302

Nozzle holder frame for one channel Included in the package:

DL-UNI31019	inner Ø 17 mm – 1pc*
DL-UNI31020	inner Ø 18,9 mm – 1pc
DL-UNI31021	inner Ø 19,2 mm – 1pc
DL-UNI31022	inner Ø 21 mm – 1pc
DL-UNI31031	inner Ø 21,4 mm – 1pc
DL-SZR	cup-clamp sprayer 7 mm

* mounted on a frame




DL-UNI21032

holder bracket injectors per channel

equinment for diesel



Nozzle holder frame for one channel with bracket assembly

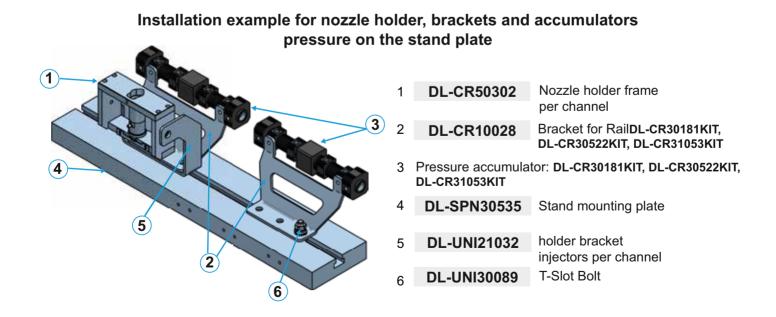



1

STANDS and EQUIPMENT for testing common rail injectors and pumps

EQUIPMENT FOR CHECKING PUMPS AND INJECTORS



DL-CR10029

Bracket for pressure accumulator (Rail)

Suitable for the following pressure accumulators:

DL-CR30181KIT DL-CR30522KIT DL-CR31053KIT for 2 pressure regulators for 3 pressure regulators

rail with cooling for 3 pressure regulators)

Some drives can be installed from various vehicles

It is established on any stands.

For installation, it is necessary to fix the bracket with one or two bolts on top of the stand plate. One or two bolts are preliminarily installed in the T-slot of the plate.

The number of bolts is determined independently or depending on the location of the bracket. For example, with a longitudinal installation on the stand plate, it is possible to fix the bracket with 1-2 bolts, and with a transverse arrangement, fastening is possible with only one bolt. The bracket is put on the bolts through the holes and the bracket is fixed to the plate with nuts.

ATTENTION!

DL-CR10027

Bolts and nuts are not included in the scope of delivery!

Suitable for the following pressure accumulators:

Bracket for pressure accumulator (Rail)





for 2 pressure regulators
for 3 pressure regulators
rail with cooling for
3 pressure regulators)

Some drives can be installed from various vehicles

DL-CR30181KIT

DL-CR30522KIT

DL-CR31053KIT

It is installed regularly on stands CR-TEST 4E, CR-TEST-2P, on stands of the SPF series manufactured by Dieselland.

For installation on other stands, it is necessary to make two M10 threaded holes on the side of the plate in a convenient place.





DL-CR10025 DL-KDRJ

Bracket - injector frame holder



DL-CR10006

Protective glass from polycarbonate 6 mm thick. Protective glass is mounted on brackets DL-CR10011 or DL-CR-10025

Contents of delivery: Protective glass - 1 pc. U-shaped handle - 2 pcs.



DL-CR10010

Protective glass from polycarbonate 8 mm thick. Protective glass is mounted on brackets DL-CR10011 or DL-CR-10025

Contents of delivery: Protective glass - 1 pc. U-shaped handle - 2 pcs.



DL-CR10011

A set of brackets for installing a protective fences

Installed with protective railing polycarbonate **DL-CR10006** and **DL-CR10010** directly on the stand plate.

Contents of delivery: Protection mounting bracket - 2 pcs. Nut "lamb" for fixing the protection - 2 pcs.





Pressure accumulator (Rail) for checking nozzles and CR pumps on the stand

The rail has holes for:

- pressure sensor connection M18x1.5
- pressure regulator connections M24x1.5 (2 holes)
- backflow connections M12x1.5 (4 holes)
- liquid supply to rail M14x1.5 (2 holes)
- exit of liquid from railan M14x1.5 (4 holes)
- connection of safety valve M20x1.5
- pressure relief in case of its excess Ø 3mm. or M5
- M6 pressure gauge mounts (2 blind holes)
- M8 rail attachments (2 or 4 blind holes).

Contents of delivery:

- 1. DL-CR30181 ramp (Rail) - 1 pc,
- 2. DL-UNI30218 fitting M14x1.5 in a set with washers-gaskets SHP15084 - 6 pcs,
- plug with internal thread M14x1.5 5 pcs, 3. DL-UNI50271
- 4. DL-UNI30497 plug instead of pressure regulator - 2 pcs.,
- plug instead of safetyvalve M20x1.5 1 pc. 5. DL-CR30493
- washer-gasket for pressure sensor 6. DL-SHP15084
- 7. DL-UNI30162 M18x1.5 plug instead of pressure sensor

DL-CR30522KIT (for 3 regulators)

Pressure accumulator (Rail) for testing pumps CP1, CP2, CP3, CP4, Delphi, Denso and CR injectors on the bench

The rail has holes for:

- pressure sensor connection M18x1.5
- pressure regulator connections M24x1.5 (3 holes)
- backflow connections M12x1.5 (5 holes)
- liquid supply to rail M14x1.5 (2 holes)
- liquid outlet from railan M14x1.5 (2 holes)
- connection of safety valve M20x1.5
- pressure relief in case of its excess Ø3mm. or M12x1.5
- M6 pressure gauge mounts (2 blind holes)
- M8 rail attachments (2 or 4 blind holes).

- DL- CR30522 ramp (Rail) - 1 pc, 1.
- itting M14x1.5 in a set with washers-gaskets 2. DL-UNI30218 SHP15084 - 6 pcs,
- plug with internal thread M14x1.5 5 pcs, 3. **DL-UNI50271**
- 4. plug instead of pressure regulator - 3 pcs., DL-UNI30497
- plug instead of safetyvalve M20x1.5 1 pc. 5. DL-CR30493
- washer-gasket for pressure sensor 6. DL-SHP15084
- 7. DL-UNI30162 M18x1.5 plug instead of pressure sensor









DL-CR30777KIT

Pressure accumulator (Rail) for testing CR injectors, pumps BOSCH CP1, CP2, CP3, CP4, various types High pressure fuel pump Delphi, Denso, Siemens and other CR pumps. (Mounting holes 90° away from fittings.)

The rail has threaded holes for:

- pressure sensor connection M18x1.5
- pressure regulator connections M24x1.5
- backflow connections 1 hole M12x1.5
- supply and exit of liquid from the rail 2 holes
- for fittings M14x1.5
- mounting rail M8 (2 blind holes)
- additional fitting made in one
- whole with rail M14x1.5

Contents of delivery:

- 1. **DL-CR30777** ramp (Rail) 1 pc.
- 2. **DL-UNI30218** fitting M14x1.5 in a set with washers-gaskets SHP15084 2 pcs.
- 3. DL-UNI30497 plug instead of pressure regulator 1 pc.
- 4. **DL-UNI50271** plug with internal thread M14x1.5 2 pcs.





DL-CR30180KIT

Pressure accumulator (Rail) for testing pumps CP1, CP2, CP3, CP4, Delphi, Denso and CR injectors

The rail has threaded holes for:

- pressure regulator connections M24x1.5
- backflow connections 1 hole. M12x1.5
- supply and exit of liquid from the rail 2 holes. for fittings M14x1.5
- M8 rail attachments (2 blind holes)
- nipple M14x1.5

Комплект поставки:

- 1. **DL-CR30180** ramp (Rail) 1 pc.
- 2. **DL-UNI30218** fitting M14x1.5 in a set with washers-gaskets SHP15084 2 pcs.
- 3. **DL-UNI30497** plug instead of pressure regulator 1 pc.
- 4. **DL-UNI50271** plug with internal thread M14x1.5 2 pcs.





DL-CR30526KIT

Pressure accumulator (Rail) for testing pumps CP1, CP2, CP3, CP4, Delphi,Denso and CR injectors below the pressure sensor. (Mounting holes 180° from fittings.)

The rail has threaded holes for:

- pressure sensor connection M18x1.5
- pressure regulator connections M24x1.5
- backflow connections 1 hole M12x1.5
- supply and exit of liquid from the rail 2 holes
- for fittings M14x1.5
- mounting rail M8 (2 blind holes)

Contents of delivery:

- 1. **DL-CR30526** ramp (Rail) 1 pc.
- 2. **DL-UNI30218** fitting M14x1.5 in a set with washers-gaskets SHP15084 2 pcs.
- 3. **DL-UNI30497** plug instead of pressure regulator 1 pc.
- 4. DL-UNI50271 plug with internal thread M14x1.5 2 pcs.

DL-CR30878KIT

Pressure accumulator (Rail) for testing pumps CP1, CP2, CP3, CP4, Delphi,Denso and CR injectors below the pressure sensor. (Mounting holes 90° away from fittings.)

The rail has threaded holes for:

- pressure sensor connection M18x1.5
- pressure regulator connections M24x1.5
- backflow connections 1 hole M12x1.5
- supply and exit of liquid from the rail 2 holes for fittings M14x1.5
- mounting rail M8 (2 blind holes)

- 1. **DL-CR30878** ramp (Rail) 1 pc.
- 2. **DL-UNI30218** fitting M14x1.5 in a set with washers-gaskets SHP15084 2 pcs.
- 3. **DL-UNI30497** plug instead of pressure regulator 1 pc.
- 4. **DL-UNI50271** plug with internal thread M14x1.5 2 pcs.







DL-CR30479KIT

Pressure accumulator (Rail) for testing pumps and CR injectors for pressure regulator and safety valve.

The rail has threaded holes for:

- connection of the pressure regulator M24x1.5 (1 hole)
- backflow connections M12x1.5 (1 hole)
- supply and exit of liquid from the rail M14x1.5 (3 holes)
- connection of safety valve M20x1.5
- pressure relief if it is exceeded M12x1.5
- M6 pressure gauge mounts (2 blind holes)
- M8 rail attachments (4 blind holes)

ATTENTION!

Pressure regulators and pressure sensor included supplies are not included! The pressure sensor is connected through the fitting-adapter M14xM18

Contents of delivery:

1. DL-CR30479 Ramp (Rail) - 1 piece

2.	DL-UNI30218	Fitting M14x1.5 complete with washers-gaskets
		SHP15084 - 3 pcs.
3.	DL-UNI30497	Plug instead of pressure regulator - 1 pc.
4.	DL-UNI50271	Plug with internal thread M14x1.5 - 3 pcs.
5.	DL-UNI30796	Special fitting-adapter for the sensor
		pressure M14xM18 - 1 pc.
6.	DL-UNI30493	Plug instead of safety valve - 1 pc.
7.	22-HS-06	M12x1.5 bolt-banjo fitting for connection
		backflow, hole next to the pressure regulator - 1 pc.
8.	22-RSN-06	Banjo fitting Ø12mm x 8mm (herringbone) for connection
		back drain - 1 pc.
9.	D-GM1537AN	Rubber-metal washer Ø12mm, installed on the plug
		DL-UNI30636, banjo bolt 22-HS-06 and similar parts providing
		connection tightness - 2 pcs.
		-

*Instead of a banjo fitting Ø12mm x 8mm **22-RSN-06**, an M12" x 8 fitting can be used **34-R0608** M12 x 1.5 allowing backflow through Teflon tube **P1006**





dieselland

DL-CR50269

Drive holder bracket Pressure (RAIL) DL-CR30180

Also suitable for pressure accumulators DL-CR30479, DL-CR30526, DL-CR30878, DL-CR30777

DL-CR50268

Drive holder bracket Pressure (RAIL) DL-CR30188





DL-CR30188KIT

Pressure accumulator (Rail) for testing pumps CP1, CP2, CP3, CP4, Delphi, Denso and CR injectors. Rail has channels cooling for improved thermal stability during testing and testing of nozzles and pumps of the Common-Rail system.

The rail has threaded holes for:

- pressure sensor connection M18x1.5
- pressure regulator connections
- backflow connections 1 hole. M12x1.5
- fitting for connecting a hose or tube for rail cooling Ø8mm
- supply and exit of liquid from the rail 3 holes. for fittings M14x1.5
- fixings, 4 blind holes. M8.

Contents of delivery:

- 1. DL-CR30188 рампа (Rail) 1 шт.
- DL-UNI30218 2 fitting M14x1.5 complete with washers-gaskets SHP15084 - 3 pcs. 3.
 - **DL-UNI30497** plug instead of pressure regulator - 1 pc.
- 4. **DL-UNI50271** plug with internal thread M14x1.5 - 2 pcs. 5.
 - fitting 1/8"x8 (herringbone) for connecting hoses **DL-UNI30293** cooling - 2 pcs.
- 6 DL-UNI30162 plug instead of pressure sensor M18x1.5 - 1 pc.





DL-CR31068KIT

Pressure accumulator (Rail) for testing pumps CP1, CP2, CP3, CP4, Delphi, Denso and CR injectors. The rail has cooling channels for improved thermal stability in testing and testing nozzles and pumps of the Common-Rail system.

The rail has threaded holes for:

- pressure sensor connection M18x1.5
- pressure regulator connections
- backflow connections 1 hole M12x1.5
- safety valve
- fitting for connecting a hose or tube for
- cooling rail diameter 8mm
- supply and exit of liquid from the rail 3 holes for fittings M14x1.5
- fixings, 4 blind holes M8

- 1. **DL-CR31068** ramp (Rail) 1 pc.
- 2. **DL-UNI30218** fitting M14x1.5 in a set with washers-gaskets SHP15084 - 3 pcs.
- 3. DL-UNI30497 plug instead of pressure regulator - 1 pc.
- **DL-UNI50271** plug with internal thread M14x1.5 - 1 pc. 4.
- DL-UNI30293 5. fitting 1/8"x8 (herringbone) for connecting hoses cooling - 2 pcs.
- 6. **DL-UNI30162** plug instead of pressure sensor M18x1.5 1 pc.





DL-CR31053KIT

Pressure accumulator for 3 regulators with cooling for testing injection pump CR

Contents of delivery:

00	intents of deliv	y.	
1.	DL-CR31053	ramp (Rail)) - 1 pc.
2.	DL-UNI3015	Plug instea	id of pressure regulator - 3 pcs.
3.	DL-UNI3016	Plug M18x	1.5 instead of pressure sensor - 1 pc.
4.	34-R0608M12X	5 Fitting M1	2 "x8 for backflow - 3 pcs.
5.	34-RL0408	Fitting-angle 8n	nmx8mm for backflow - 2 pcs.
6.	34-RL0508	Tee fitting 8mm	x8mmx8mm for backflow - 1 pc.
7.	P1006	Teflon tube d.8	mmx180mm - 2 pcs.
8.	22-HS-06	M12x1.5 bolt-b	anjo fitting for hose connection
		return drain - 1	pc.
9.	22-RSN-06	Banjo fitting Ø	12mmx8mm (herringbone) for
		backflow hose	connections - 1 pc.
10.	D-GM1537	Rubber-me	tal washer Ø12mm - 2pcs
11.	DL-UNI306	Plugs in ba	ckflow channels - 2 pcs.
12.	DL-UNI302	1/8"x8 (her	ringbone) fitting for connecting hoses
		cooling - 2	pcs.
13.	DL-UNI302	High press	sure fitting M14(1.5)xM14(1.5)
		in a set wi	th washers-gaskets SHP15084 - 2 pcs.
14.	DL-UNI502	Plug for hi	gh pressure fitting - 2 pcs.
15.	DL-SHP150	Gasket for	r pressure sensor - 1 pc.





DL-UNI30828KIT

high pressure Bosch filter adapter for testing pumps CP2-CP4.

The adapter is mounted in one of the 2 holes M14x1.5 in Rail. Used with pressure accumulators (rail) DL-CR31053, DL-CR30181 and DL-CR30522

The adapter has threaded holes:

- for a filter for a special fitting M18x1.5 (1 hole)
- for liquid supply M14x1.5 (2 holes from above)
- for connecting a pressure sensor M18x1.5 (1 hole)
- for connecting a safety valve
- M20x1.5 (1 hole)
- to relieve pressure in case of its excess M5 (1 hole)

- Adapter housing 1 pc, 1. DL-UNI30828
- 2. DL-UNF21100 High pressure filter - 1 pc.,
- 3. DL-UNI30871 Special fitting for high pressure filter
- M14xM18 1 pc., 4. DL-UNI30218 Fitting M14x1.5 -2 pcs.,
- 5. DL-SHP15084
- Sealing washer 3 pcs., 6. **DL-UNI50271** Plug M14x1.5 -1 pc.,
- 7. 34-RL01006M5
 - Straight fitting Ø 6mm x M5 or 34-RL3106M5 elbow fitting Ø 6mm x M5.,
- 8. DL-SHP15084 Gasket for pressure sensor 1 pc.







DL-CR31049KIT

Pressure accumulator (rail) for checking injectors and pumps with cooling (for 3 pressure regulators)

Pressure accumulator (Rail) for testing pumps CP1, CP2, CP3, CP4, Delphi, Denso and CR injectors The rail has cooling channels for improved thermal stabilization during testing and testing nozzles and pumps of the Common-Rail system.

Contents of delivery:

1.	DL-CR31049	Pressure accumulator for 3 pressure regulators
2.	DL-CR30497	Plug (M24x1.5mm) instead of regulator
		pressure - 2 pcs.
3.	DL-UNI30162	Plug (M18x1.5mm) instead of pressure sensor
		- 1 pc
4.	DL-UNI30056	Cooling fitting (1/2"x8mm) - 2 pcs.
5.	DL-UNI30020	Fitting (1/4 "x8mm) outlet of the return drain
		from the pressure regulator - 3 pcs.
6.	DL-UNI31478	Fitting (M18x1.5mm X M14x1.5mm)
		for high pressure tube - 3 pcs.
7.	DL-UNI50271	Plug for fitting DL-UNI31478 - 1 pc.
8.	DL-UNI30203	Plugs (1/8") for cooling channels - 4 pcs.
9.	DL-UNI30635	Plug (M12x1.5) for rubber-metal
		washer - 1 pc.

ATTENTION! Regulators and pressure sensor not included!

DL-UNI21042

Pressure accumulator bracket



DL-CR31514 Drain rail

Designed to work with the main pressure accumulator (rail) with installed 3 taxiways. This drain rail facilitates switching drain hoses. Normally, the pressure accumulator **DL-CR31049** is drained from

each pressure regulator (RD). When using this rail drain is made from one fitting.



116

DL-CR31528 Drain rail

Designed to work with the main pressure accumulator (rail) with installed 2 taxiways. This drain rail facilitates switching drain hoses. Normally, the pressure accumulator **DL-CR31049** is drained from each pressure regulator (RD). When using this rail drain is made from one fitting.



STANDS and EQUIPMENT for testing common rail injectors and pumps

EQUIPMENT FOR CHECKING PUMPS AND INJECTORS





DL-CR31257KIT

Pressure accumulator (rail) for checking injectors and pumps with cooling (for 2 pressure regulators)

The rail has threaded holes for:

- pressure sensor connection (M18x1.5)
- pressure regulator connection (2 holes M24x1.5mm)
- backflow connections and plugs (4 holes 1/8")
- a fitting for connecting a hose or tube for rail cooling and plugs (5 holes 1/4")
- supply and output of high pressure fluid from the rail (2 holes M24x1.5mm)
- high-pressure fluid inlet and outlet from the rail on the side (2 holes M14x1.5mm)
- rail mounting (4 blind holes M8)

Contents of delivery:

- 1. **DL-CR31257** Pressure accumulator for 2 pressure regulators
- 2. **DL-CR30497** Plug (M24x1.5mm) instead of pressure regulator (1 pc.)
- 3. **DL-UNI30162** Plug (M18x1.5mm) instead of pressure sensor (1 pc.)
- 4. **DL-UNI30020** Fitting (1/4"x8mm) for inlet and outlet of TJ for cooling (2 pcs.)
- 5. DL-UNI30202 Plug (1/4") cooling channel (3 pcs.)
- 5. **DL-UNI30293** Fitting (1/8"x8mm) for backflow outlet from RD (1 pc.)
- 6. **DL-UNI30203** Plug (1/8") for the rubber gasket in the channel back drain (1 pc.)
- 7. **DL-UNI31082** Plug (1/8") slotted in the backflow channel with rail ends (2 pcs.)
- 6. **DL-UNI31041** Fitting (M24x1.5mm X M14x1.5mm) for TVD (1 pc.)
- 7. DL-UNI31039 Plug (M24x1.5mm) for HP channel (1 pc.)
- 8. DL-UNI31535 Fitting (M14x1.5 X M14x1.5mm) for TVD (2 pcs.)
- 9. **DL-UNI50271** Plug for fitting DL-UNI31535 (1 pc.)

ATTENTION!

Regulators and pressure sensor not included!




DL-UNI21041

Pressure accumulator bracket



ANGLE ADAPTERS




Article	a (mm)	b (mm)
DL-UNI50278	M14 x 1,5	M14 x 1,5
DL-UNI50279	M14 x 1,5	M12 x 1,5
DL-UNI50280	M14 x 1,5	M16 x 1
DL-UNI50281	M14 x 1,5	M16 x 1,5
DL-UNI50282	M14 x 1,5	M18 x 1,5

DL-UNI50283	M12 x 1,5	M14 x 1,5	
DL-UNI50284	M12 x 1,5	M12 x 1,5	
DL-UNI50285	M12 x 1,5	M16x1	
DL-UNI50286	M12 x 1,5	M16x1,5	
DL-UNI50287	M12 x 1,5	M18 x 1,5	



ADAPTERS STRAIGHT




Article	a (mm)	b (mm)
DL-UNI50288	M14 x 1,5	M14 x 1,5
DL-UNI50289	M14 x 1,5	M12 x 1,5
DL-UNI50290	M14 x 1,5	M16 x 1
DL-UNI50291	M14 x 1,5	M16 x 1,5
DL-UNI50292	M14 x 1,5	M18 x 1,5

DL-UNI50293	M12 x 1,5	M14 x 1,5	
DL-UNI50294	M12 x 1,5	M12 x 1,5	
DL-UNI50295	M12 x 1,5	M16 x 1	
DL-UNI50296	M12 x 1,5	M16 x 1,5	
DL-UNI50297	M12 x 1,5	M18 x 1,5	




ANGLE ADAPTERS WITH INTERCHANGEABLE NUT

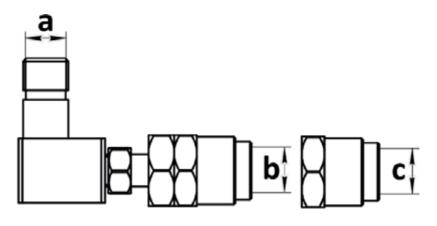

Article	a (mm)	b (mm)	c (mm)	
DL-UNI50084	M14 x 1,5	M12 x 1,5	M14 x 1,5	Statistics in a
DL-UNI50088	M12 x 1,5	M12 x 1,5	M14 x 1,5	

ADAPTERS STRAIGHT WITH INTERCHANGEABLE NUT



Article	a (mm)	b (mm)	c (mm)	
DL-UNI50083	M14x1,5	M12x1,5	M14x1,5	
DL-UNI50087	M12x1,5	M12x1,5	M14x1,5	









DL-UNI30980


Replaceable nut from M16x1.0 to M18x1.5 for injector CR Bosch 0445120303 (MB)

DL-UNI30981

Replacement nut from M16x1.5 to M18x1.5 for pumps CR Bosch CP4 0445010637, 0445010506, 0445010512.

DL-UNI31398

Replaceable nut from M18x1.5 to M18x1.5 for connection to pressure accumulator BOSCH EPS-815 / EPS-708

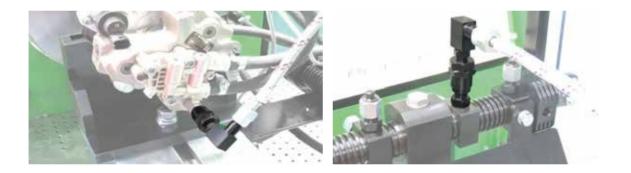







DL-UNI50175

Adapter straight long M14xM12 (pitch 1.5mm) with inner cone

Used for installation on a pressure accumulator

Can be installed for testing BOSCH PIEZO injectors.



1

EQUIPMENT FOR CHECKING PUMPS AND INJECTORS









DL-UNI50055

Thread adapter M14x1.5mm to M12x1.5mm

Contents of delivery adapter - 1 pc.

DL-UNI50056

Thread adapter M12x1.5mm to M14x1.5mm

Contents of delivery adapter - 1 pc.

DL-UNI50276

Thread adapter M14x1.5mm to M14x1.5mm

Contents of delivery adapter - 1 pc.

DL-CR50121

High pressure filter adapter DL-UNF21100 Mounted instead of a conventional fitting in the drive pressure (Rail) DL-CR30479, DL-CR30180, DL-CR30181, DL-CR30188, DL-CR30522, DL-CR30526 Contents of delivery: adapter - 1 pc., adapter body with M14x1.5 thread - 1 pc.

ВНИМАНИЕ! Фильтр высокого давления DL-UNF21100 в комплект поставки не входит и заказывается отдельно!



DL-UNI30650

Safety valve adapter for pressure accumulator (Rail) DL-CR30188, DL-CR30180 Contents of delivery: adapter - 1 pc.



122

DL-UNI30796

Adapter from M14 to M18 thread for installation pressure sensor in pressure accumulators DL-CR30479,DL-CR30180 Contents of delivery: adapter - 1 pc.





DL-CR14014

Angle adapter with thread M14x1.5mm to M14x1.5mm

Convenient when connected to pumps high pressure, pressure accumulators (rails) and nozzles.

Delivery set: adapter 1 pc.



DL-CR14012

Angle adapter with thread M14x1.5mm to M12x1.5mm

Convenient when connected to pumps high pressure, pressure accumulators (rails) and nozzles.

Delivery set: adapter 1 pc.







DL-UNI30287

Adapter with internal thread G1/2" for pressure gauge at 2000 bar. Has a connecting M14x1.5mm thread with 60° cone for tube high pressure (HPT)

Contents of delivery: adapter - 1 pc.



DL-UNI30508

Adapter with internal thread M20x1.5mm for pressure gauge at 2500 bar. Has a connecting M14x1.5mm thread with 60° cone for tube high pressure (HPT).

Contents of delivery: adapter - 1 pc.



DL-SM Gasket for pressure gauge





DL-CR14P2500 Pressure gauge 2500 bar







DL-KM2000

Pressure gauge bracket for 2000bar. For rail DL-CR30181 and DL-CR30522

Contents of delivery:

- bracket
- clamping bar
- M6x60 bolt, nuts, washers 2 sets
- M6x45 bolt, washers 2 sets

DL-KM3000

Pressure gauge bracket 2000bar for installation on a stand plate.

Contents of delivery:

- bracket
- Profile bolt with nut, washer and grommet
- clamping bar
- M6X60mm bolt with nut, washer and grommet 2 sets



DL-KM2500

Pressure gauge bracket for 2500bar. For rail DL-CR30181 and DL-CR30522

Contents of delivery:

- main bracket
- pressure gauge mounting ring
- M6x45 bolt, washers 2 sets
- M6x30 bolt, washers 2 sets
- M6x10mm bolt 3 pcs.



DL-KM3500

Pressure gauge bracket 2500bar for installation on a stand plate

- main bracket
- pressure gauge mounting ring
- Profile bolt with nut, washer and grommet
- M6 x30mm bolt with washer and grommet 2 sets
- M6x10mm bolt 3 pcs.







DL-CR10058 Bosch pressure sensor 1500 bar

DL-CR10059 Bosch pressure sensor 1500 bar



DL-CR10060 Bosch pressure sensor 1500 bar



DL-CR10050 Bosch pressure sensor 1800 bar



DL-CR10061 Bosch pressure sensor 1800 bar



DL-CR10052 Bosch pressure sensor 2200 bar







Bosch pressure sensor 2400 bar

DL-CR10053

DL-CR10062 Bosch pressure sensor 2400 bar

DL-CR10063 Bosch pressure sensor 2400 bar



126



DL-CR10051 Bosch pressure regulator 1800 bar



DL-CR10064 Bosch pressure regulator 1800 bar



DL-CR10065 Bosch pressure regulator 1800 bar



DL-CR10054 Bosch pressure regulator 2200 bar



DL-CR10055 Bosch pressure regulator 2700 bar



DL-CR10056 Safety valve Bosch 1800 bar



DL-CR10066 Safety valve Bosch 1800 bar



DL-CR10057 Safety valve Bosch 2400 bar









DL-CR50204

Set with pressure gauge for testing back pressure in the injector return BOSCH Piezo.

The test is carried out on the vehicle. The pressure gauge is installed in the device with a hook fixing it over the motor space (eg under the hood).

Using this valve kit backwater **DL-CR50177** possible control the correct operation this valve when testing injectors BOSCH Piezo **on the stand.**



Contents of delivery:

1.	D-12-TV63-016	Pressure gauge 0-16 bar
2.	DL-CR31311	Special adapter for pressure gauge
3.	DL-CR31310	Union with rubber gasket for connection to the trunk back drain in the car.
4.	DL-CR31285	Union with fixing screw for installation in the return connection drain nozzle
5.	34-RL0506	Tee with quick fittings 6mm
6.	34-RL010601	Straight quick-release fitting 1/8x6mm - 2 pcs.
7.	DL-CR50246	Suspended Mounting Bracket
8.	D-P1004	Teflon tube - 300cm

ATTENTION! Valve DL-CR50177 is not included in the scope of delivery!









DL-UNI31498

DL-CR30493

M14x1.5 x M14x1.5 fitting for pressure accumulator (Rail)

M14x1.5 x M12x1.5 fitting for pressure accumulator (Rail)

Plug with external thread M20 x1.5 instead of safety valve for pressure accumulator (Rail)





DL-UNI30159

Plug with external thread M24x1.5 heat-treated instead of pressure regulator for pressure accumulator (Rail)



DL-UNI30162

Plug with external thread M18x1.5 instead of pressure sensor for pressure accumulator (Rail)



DL-UNI30636

Plug with external thread M12x1.5 for drain hole in the pressure accumulator (Rail)



DL-UNI30529

Plug with external thread M14x1.5



DL-UNI50271 (CR30)

Plug with internal thread M14x1.5 for fitting DL-UNI30218 for pressure accumulator (Rail)



130

DL-UNI50275

Plug with internal thread M12x1.5 for fitting DL-UNI3021 for pressure accumulator (Rail)





DL-UNI30003

Fitting M14x1.5 X M14x1.5 60° cone for connecting two high pressure pipes



DL-UNI31589

Fitting M14x1.5 X M12x1.5 60° cone for connecting two high pressure pipes



DL-UNI31592 Fitting M12x1.5 X M12x1.5 60° cone for connecting two high pressure pipes



DL-UNI50312

Set of fittings and plugs for (TVD) fuel lines high pressure

Contents of delivery:

DL-UNI30003Tubing adapterM14x1.5 X M14x1.5mm. Has a cone on both sides for tightfit to the cone of the tubeDL-UNI31589Tubing adapterM14x1.5 X M12x1.5mm. Has a cone on both sides for tightfit to the cone of the tubeDL-UNI31592Tubing adapterM12x1.5 X M12x1.5mm. Has a cone on both sides for tightfit to the cone of the tubeDL-UNI31592Tubing adapterM12x1.5 X M12x1.5mm. Has a cone on both sides for tightfit to the cone of the tubeDL-UNI31590Plug M12x1,5 cone 60°DL-UNI31591Plug M14x1,5 cone 60°



DL-UNI31591

M14x1.5 plug 60° cone for high pressure pipe



DL-UNI31590

M12x1.5 plug 60° cone for high pressure pipe







DL-TVD–S (Type 5/4 grey)

High Pressure Tube 1000x14x14 mm 1800 bar

DL-TVD-K1000

High Pressure Tube 1000x14x14 mm 2500 bar



DL-TVD–K830

High Pressure Tube 840x14x14 mm 2500 bar



DL-TVD-K700

High Pressure Tube 700x14x14 mm 2500 bar



DL-TVD-G

High Pressure Tube 600x14x14 mm 2500 Bar



132

DL-TVD

High Pressure Tube for stands and rigs:

TVD31212 (300x12x12), TVD31214 (300x12x14), TVD31414 (300x14x14), TVD41212 (400x12x12), TVD41214 (400x12x14), TVD41414 (400x14x14), TVD51214 (500x12x14), TVD51414 (500x14x14), TVD61212 (600x12x12), TVD61214 (600x12x14), TVD61414 (600x14x14)



DL-CR50149 Retrofit kit for CR-Jet stands for pressure 2400 bar



Kit includes:

- 1. Plug in Rail 4 pcs.
- 2. Plug instead of pressure regulator
- 3. Pressure sensor 2400 bar
- 4. Pressure regulator 2400 bar
- 5. Bracket for rail
- 6. Tree fitting 1/8" x1.5 2 pcs.
- 7. Fitting quick adapter M12x1.5 2 pcs.
- 8. Corner fittings 8x8 2 pcs.
- 9. Fitting M14x M14 (step 1.5) 4 pcs.
- 10. Teflon tube Ø 8mm
- 11. Rail with cooling
- 12. Flange Ø 107mm
- 13. Hose Ø 8mm
- 14. Banjo 14.5x8 mm, banjo bolt M14x1.5 (for supplying TJ to high-pressure fuel pump)
- 15. Rubber-metal gasket M14x1.5 2 pcs.
- 16. M14x1.5 fitting for backflow from high pressure fuel pump
- 17. Rubber-metal gasket 14x1.5
- 18. Fitting M12x1.5 3 pcs. (two for injection pump and one for rail drain)
- 19. Rubber-metal gasket M12
- 20. Clamp 13 mm 3 pcs.
- 21. High pressure fuel pump

DL-CR50149 Retrofit kit for CR-Jet stands for pressure 2400 bar without injection pump



CRISTINA

CRistina High-quality testing and assembly complex of BOSCH, DENSO and DELPHI Common Rail injectors.

CRistina repair- and testing complex is dedicated to assembing and disassembling Bosch, Denso and Delphi Common Rail inejctors according to manufacturer specified steps and mechanical tolerances.

The complex offers the ability to measure relevant mechanical tolerances of the injector parts and electrical characteristics of the electromagnet. The assembly/disasembly steps and critical measurement points are presented by convenient step-by-step instructions descriptions and relevant images of the work process itself.

Available in options:

- CRISTINA-BASE
- CRISTINA-BASE-F
- CRISTINA-FULL
- CRISTINA-PROF
- CRISTINA-PROF-FULL
- CRISTINA-SPECIAL







CRISTINA-BASE

- 1. DL-CRN005 Stand for measuring and adjusting injector parameters 1 set
- 2. DL-KIP020 or DL-KIP025 Indicator digital measuring head
- 3. DL-KIP0023 or DL-KIP0028 Communication device for measuring head
- 4. DL-CRN50094 Probe set and adapters
- 5. DL-CRN50099 Set of 4 adapters for measuring clearances of injectors BOSCH, DENSO
- 6. **DL-CRistina** Injector control signal activator "Valve stroke actuator" with kit cables including:
 - Power cable 220V 1 pc.
 - Main cable for connection to the electromagnet 1 pc.
 - Adapter cable for light injector 1 pc.
 - Adapter cable for cargo injector 1 pc.
- 7. CRistina Software
- 8. DL-PASSCRistina Passport (technical description, instruction manual)
- NOTE: Dedicated workbench table is not included.





CRISTINA-BASE-F

Contents of delivery:

- 1. DL-CRN005 Stand for measuring and adjusting injector parameters 1 set
- 2. **DL-ST01** Clamp for disassembling and assembling nozzle elements and measuring its parameters.
- 3. DL-KIP020 or DL-KIP025 Indicator digital measuring head
- 4. DL-KIP0023 or DL-KIP0028 Communication device for measuring head
- 5. DL-CRN50094 Probe set and adapters
- 6. DL-CRN50099 Set of 4 adapters for measuring clearances of injectors BOSCH, DENSO
- 7. **DL-CRistina** Injector control signal activator in large case with a set of cables including:
 - Power cable 220V 1 pc.
 - Main cable for connection to the electromagnet 1 pc.
 - Adapter cable for light injector 1 pc.
 - Adapter cable for cargo injector 1 pc.
- 8. Personal Computer
- 9. CRistina Software
- 10. DL-PASSCRistina Passport (technical description, operating instructions)

NOTE: Dedicated workbench table is not included.





CRISTINA-FULL

Contents of delivery:

- 1. DL-CRN005 Stand for measuring and adjusting injector parameters 1 set
- 2. DL-KIP020 or DL-KIP025 Indicator digital measuring head
- 3. DL-KIP0023 or DL-KIP0028 Communication device for measuring head
- 4. DL-CRN50094 Probe set and adapters
- 5. **DL-CRN50099** Set of 4 adapters for measuring clearances of injectors BOSCH, DENSO
- 6. **DL-CRistina** Injector control signal activator "Valve stroke actuator" with kit cables including:
 - Power cable 220V 1 pc.
 - Main cable for connection to the electromagnet 1 pc.
 - Adapter cable for light injector 1 pc.
 - Adapter cable for cargo injector 1 pc.
- 7. PC with monitor or laptop
- 8. CRistina Software

CR-NEXT-ST01

11.

- 9. DL-PASSCRistina Passport (technical description, operating instructions)
- 10. **DL-125** Vice L=250mm

Special table-workbench with two drawers included:

- Table with two drawers
- Perforated wall for tool placement
- Lighting ramp with two holders
- PC shelf
- Shelf for signal generator





or





CRISTINA-PROF

- 1. DL-CRN005 Stand for measuring and adjusting injector parameters 1 set
- 2. DL-KIP020 or DL-KIP025 Indicator digital measuring head
- 3. DL-KIP0023 or DL-KIP0028 Communication device for measuring head
- 4. DL-CRN50094 Probe set and adapters
- 5. **DL-CRN50099** Set of 4 adapters for measuring clearances of injectors BOSCH, DENSO
- 6. **DL-CRistina** Injector control signal activator "Valve stroke actuator" with kit cables including:
 - Power cable 220V 1 pc.
 - Main cable for connection to the electromagnet 1 pc.
 - Adapter cable for light injector 1 pc.
 - Adapter cable for cargo injector 1 pc.
- 7. CRistina Software
- 8. **DL-PASSCRistina** Passport (technical description, operating instructions)
- 9. **D-MV200UM** Electron microscope
- 10. D-07147122 Torque wrench 1/2" 20-100 Nm
- 11. DL-CR50104 Support ring set
- 12. **DL-UNI30390** Wrench for removing the solenoid for CR injectors with a 30 mm hexagon.
- 13. DL-UNI30389 Wrench for removing the solenoid for CR injectors with a 29 mm hexagon.
- 14. **DL-UNI30435** Wrench for removing the solenoid of CR injectors with a 28 mm dodecahedron.
- 15. **DL-UNI30434** Wrench for removing the solenoid of CR injectors with a 27 mm dodecahedron.
- 16. **DL-UNI50046** 3 prong wrench for removing the nut in the electronic part of DENSO injectors.
- 17. DL-UNI30545 Wrench for removing the nut in the electronic part of Siemens injectors DL-UNI30545
- 18. **DL-UNI50050** A set of wrenches for dismantling the atomizer nut (hexagon 14 mm, 15 mm, 17mm, 19mm, 16mm and 17.5mm octagon and 27mm wrench)
- 19. **DL-CR30561** Wrench for dismantling the multiplier nut for Bosch CR injectors, hexagon 10 mm.
- 20. **DL-TORX10** Wrench for removing the nut in the electronic part of Bosch injectors 10 mm.



- 21. **DL-TORX12** Wrench for removing the nut in the electronic part of Bosch injectors 12 mm.
- 22. **DL-AP2** Set of 2 anti-magnetic tweezers.
- 23. DL-08CR5-244 Adjusting washers 55 pcs.
- 24. DL-09CR5-219 Adjusting washers 55 pcs.
- 25. **DL-11CR5-236** Adjusting washers 55 pcs.
- 26. DL-12CR5-230 Adjusting washers 130 pcs.
- 27. **DL-16CR5-232** Adjusting washers 60 pcs.
- 28. **DL-18CR5-271** Adjusting washers 55 pcs.
- 29. **DL-19CR5-273** Adjusting washers 55 pcs.
- 30. DL-25CR5-288 Adjusting washers 55 pcs.
- 31. DL-28CR5-287 Adjusting washers 110 pcs.

NOTE: Dedicated workbench table is not included.





CRISTINA-PROF-FULL

- 1. DL-CRN005 Stand for measuring and adjusting injector parameters 1 set
- 2. DL-KIP020 or DL-KIP025 Indicator digital measuring head
- 3. DL-KIP0023 or DL-KIP0028 Communication device for measuring head
- 4. DL-CRN50094 Probe set and adapters
- 5. **DL-CRN50099** Set of 4 adapters for measuring clearances of injectors BOSCH, DENSO
- 6. **DL-CRistina** Injector control signal activator "Valve stroke actuator" with kit cables including:
 - Power cable 220V 1 pc.
 - Main cable for connection to the electromagnet 1 pc.
 - Adapter cable for light injector 1 pc.
 - Adapter cable for cargo injector 1 pc.
- 7. CRistina Software
- 8. DL-PASSCRistina Passport (technical description, operating instructions)
- 9. **D-MV200UM** Electron microscope
- 10. **D-07147122** Torque wrench 1/2" 20-100 Nm
- 11. DL-CR50104 Support ring set
- 12. **DL-UNI30390** Wrench for removing the solenoid for CR injectors with a 30 mm hexagon.
- 13. DL-UNI30389 Wrench for removing the solenoid for CR injectors with a 29 mm hexagon.
- 14. **DL-UNI30435** Wrench for removing the solenoid of CR injectors with a 28 mm dodecahedron.
- 15. **DL-UNI30434** Wrench for removing the solenoid of CR injectors with a 27 mm dodecahedron.
- 16. **DL-UNI50046** 3 prong wrench for removing the nut in the electronic part of DENSO injectors.
- 17. DL-UNI30545 Wrench for removing the nut in the electronic part of Siemens injectors DL-UNI30545
- 18. **DL-UNI50050** A set of wrenches for dismantling the atomizer nut (hexagon 14 mm, 15 mm, 17mm, 19mm, 16mm and 17.5mm octagon and 27mm wrench)
- 19. **DL-CR30561** Wrench for dismantling the multiplier nut for Bosch CR injectors, hexagon 10 mm.
- 20. **DL-TORX10** Wrench for removing the nut in the electronic part of Bosch injectors 10 mm.



2

EQUIPMENT and TOOLS for repairing common rail injectors

- 21. **DL-TORX12** Wrench for removing the nut in the electronic part of Bosch injectors 12 mm.
- 22. **DL-AP2** Set of 2 anti-magnetic tweezers.
- 23. **DL-08CR5-244** Adjusting washers 55 pcs.
- 24. DL-09CR5-219 Adjusting washers 55 pcs.
- 25. **DL-11CR5-236** Adjusting washers 55 pcs.
- 26. DL-12CR5-230 Adjusting washers 130 pcs.
- 27. **DL-16CR5-232** Adjusting washers 60 pcs.
- 28. **DL-18CR5-271** Adjusting washers 55 pcs.
- 29. DL-19CR5-273 Adjusting washers 55 pcs.
- 30. **DL-25CR5-288** Adjusting washers 55 pcs.
- 31. DL-28CR5-287 Adjusting washers 110 pcs.
- 32. **DL-125** Vice L=250 mm
- 33. CR-NEXT-ST01 Special table-workbench with two drawers included:Table with two drawers
 - Perforated wall for tool placement
 - Lighting ramp with two holders
 - PC shelf
 - Shelf for signal generator
- 34. PC with monitor or laptop
- 35. **DL-KIP010** Digital measuring head 0.01mm, travel 12.7mm (1pc)
- 36. DL-KIP011 Digital measuring heads 0.001mm, travel 12.7mm (2pcs)
- 37. DL-KIP012 Digital measuring head 0.001mm, stroke 25.4mm (1pc.)
- 38. **DL-ST-01** Clamp for disassembly-assembly of injectors.





CRISTINA-SPECIAL

- 1. DL-CRN005 Stand for measuring and adjusting injector parameters 1 set
- 2. DL-KIP020 or DL-KIP025 Indicator digital measuring head
- 3. DL-KIP0023 or DL-KIP0028 Communication device for measuring head
- 4. DL-CRN50094 Probe set and adapters
- 5. **DL-CRN50099** Set of 4 adapters for measuring clearances of injectors BOSCH, DENSO
- 6. **DL-CRistina** Injector control signal activator "Valve stroke actuator" with kit cables including:
 - Power cable 220V 1 pc.
 - Main cable for connection to the electromagnet 1 pc.
 - Adapter cable for light injector 1 pc.
 - Adapter cable for cargo injector 1 pc.
- 7. CRistina Software
- 8. DL-PASSCRistina Passport (technical description, instruction manual)
- 9. **D-MV200UM** Electron microscope
- 10. **D-07147122** Torque wrench 1/2" 20-100 Nm
- 11. **DL-CR50104** Support ring set
- 12. **DL-UNI30390** Wrench for removing the solenoid for CR injectors with a 30 mm hexagon.
- 13. **DL-UNI30389** Wrench for removing the solenoid for CR injectors with a 29 mm hexagon.
- 14. **DL-UNI30435** Wrench for removing the solenoid of CR injectors with a 28 mm dodecahedron.
- 15. **DL-UNI30434** Wrench for removing the solenoid of CR injectors with a 27 mm dodecahedron.
- 16. **DL-UNI50046** 3-prong wrench for removing the nut in the electronic part of DENSO injectors.
- 17. DL-UNI30545 Wrench for removing the nut in the electronic part of Siemens injectors DL-UNI30545
- 18. **DL-UNI50050** A set of wrenches for dismantling the atomizer nut (hexagon 14 mm, 15 mm, 17mm, 19mm, 16mm and 17.5mm octagon and 27mm wrench)
- 19. **DL-CR30561** Wrench for dismantling the multiplier nut for Bosch CR injectors, hexagon 10 mm.
- 20. **DL-TORX10** Wrench for removing the nut in the electronic part of Bosch injectors 10 mm.



EQUIPMENT and TOOLS for repairing common rail injectors

- **DL-TORX12** 21. Wrench for removing the nut in the electronic part of Bosch injectors 12 mm.
- 22. DL-AP2 Set of 2 anti-magnetic tweezers.
- DL-08CR5-244 23. Adjusting washers 55 pcs.
- DL-09CR5-219 24. Adjusting washers 55 pcs.
- Adjusting washers 55 pcs. 25. DL-11CR5-236
- 26. DL-12CR5-230 Adjusting washers 130 pcs.
- DL-16CR5-232 Adjusting washers 60 pcs. 27.
- 28. DL-18CR5-271 Adjusting washers 55 pcs.
- 29. DL-19CR5-273 Adjusting washers 55 pcs.
- DL-25CR5-288 Adjusting washers 55 pcs. 30.
- DL-28CR5-287 Adjusting washers 110 pcs. 31.
- 32. **DL-125** Vice L=250 mm
- 33. **DL-STN** Special table-workbench with two drawers included: Table with two drawers
 - Perforated wall for tool placement • Lighting ramp with two holders
 - PC shelf
 - Shelf for signal generator
- 34. PC with monitor or laptop
- DL-KIP010 35. Digital measuring head 0-12.7mm, 0.01µm (1pc) 36. DL-KIP011 Digital measuring head 0-12.7mm, 0.001µm (2pcs) DL-KIP012 37. Digital measuring head 0-25.4mm, 0.001µm (1pc) 38. DL-ST-01 Clamp for disassembly-assembly of injectors. D-07147122 39. Torque wrench 1/4"-1/2" with a force of 1-25 Nm 40. D-1012020001 Stainless steel bath **DL-M035** 41. **Digital micrometer DL-M040** 42. Tripod stand for micrometer **DL-CRN50113** Set of goniometers to control the tightening of the atomizer nut 43. 44. DL-TX10 T-key Tx10 45. DL-TX25 T-wrench 2.5 mm. 46. DL-TX30 T-key 3 mm



46.	DL-TR13U	The key is six-sided extended 13 mm.
47.	DL-TR14U	The key is six-sided extended 14 mm.
48.	DL-TR15U	The key is six-sided extended 15 mm.
49.	DL-TR19U	The key is six-sided extended 19 mm.
50.	DL-CR50052	Device for filling the hydraulic compensator of the Bosch piezo injector.
51.	DL-UNI50043	Universal clamping tool for CR injectors.
52.	DL-UNI50032	Universal clamping tool for CR DENSO injectors.
53.	DL-1219KIT	Set of box spanners 10mm, 12mm, 13mm, 14mm, 15mm, 17mm, 19mm
54.	DL-UNI30776	Adapter from 1/4" to 1/2" for torque wrench

For additional payment: DL-UNI31117 Long hex wrench 17 mm.







DL-CRN50134

Table stand for tripod CR-CRistina

Contents of delivery :

- Base **CRN30918** 1pc
- Rack CRN30919 4 pcs
- Bolt with internal hexagon DIN912 M8x25 8 pcs.





DL-1019KIT

Open-end spanner set:

Contents of delivery :

• DL-UNI31210	- 10 mm
---------------	---------

- DL-UNI31212 12 mm
- DL-UNI31213 13 mm
- **DL-UNI31214** 14 mm
- **DL-UNI31215** 15 mm
- **DL-UNI31217** 17 mm
- **DL-UNI31219** 19 mm





DL-PNP08

Pneumatic press for pressing in the stop sleeve adjusting washer of the magnetic gap of the injectors Common Rail Bosch with pressure range 0-8 bar.

Contents of delivery :

- pneumatic press •
- **DL-CRN30914** adapter
- **DL-CRN30921** pusher
- **DL-CRN30915** adapter
- **DL-CRN30920** pusher



DL-CRN30915

adapter

DL-CRN30920

pusher for pneumatic press

.



DL-CRN30914

adapter

DL-CRN30921

pusher for pneumatic press



DL-CRNRLS02

Adapter kit for pneumatic press

Contents of delivery :

- **DL-CRN30914** adapter
 - pusher **DL-CRN30921**
 - **DL-CRN30915** adapter
 - pusher
 - **DL-CRN30920**



146



1 DL-CR50104

Support ring removal/installation kit

CR injector solenoid wrench with 30 mm hexagon

- 2 DL-UNI30390
- 3 DL-UNI30389 Wrench for removing the solenoid for CR injectors with a 29 mm hexagon
- 4 DL-UNI30435
- 5 DL-UNI30434
- 6 DL-UNI50046
- 7 DL-UNI30545
- 8 DL-UNI50050

DL-CR30561

DL-UNI31010

DL-UNI31012

DL-AP2

9

10

11

12

Wrench for removing the nut in the electronic part of Siemens injectors Dismantling wrench set, 14,15,17,19 mm hex, 16, 17.5 mm octagon and 27 mm wrench for torque handle Wrench for dismantling the nut of the Bosch CR injector multiplier, hexagon 10 Wrench

Wrench for removing the solenoid for CR injectors with 28 mm dodecahedron

Wrench for removing the solenoid for CR injectors with 27 mm dodecahedron

3-prong wrench for removing the nut in the electronic part of Denso injectors

for removing the nut in the electronic part of the Bosch injectors 10 mm Wrench for removing the nut in the electronic part of Bosch injectors 12mm

- Set of 2 anti-magnetic tweezers DL-AP2
- 13 DL-UNI31110 T-key Tx10
- 14 **DL-UNI31125** T-wrench 2.5mm 15 **DL-UNI31130** T-key 3 mm 16 Allen wrench hexagon 13 mm **DL-UNI31113** 17 **DL-UNI31114** Allen key 14 mm hex 18 Allen key hexagonal 15 mm **DL-UNI31115** 19 **DL-UNI31119** Allen key 19 mm hex 20 **DL-CR50052** Bosch piezo injector hydraulic compensator filling tool **DL-UNI50043** 21 Universal clamping tool for CR injectors
- 22 **DL-UNI50032** Universal clamping tool for CR Denso injectors



148

EQUIPMENT and TOOLS for repairing common rail injectors

DL-CRTOOLKIT-12

CR injector repair tool kit



1	DL-CR50104	Support ring removal/installation kit
2	DL-UNI30390	CR injector solenoid wrench with 30 mm hexagon
3	DL-UNI30389	Wrench for removing the solenoid for CR injectors with a 29 mm hexagon
4	DL-UNI30435	Wrench for removing the solenoid for CR injectors with 28 mm dodecahedron
5	DL-UNI30434	Wrench for removing the solenoid for CR injectors with 27 mm dodecahedron
6	DL-UNI50046	3-prong wrench for removing the nut in the electronic part of Denso injectors
7	DL-UNI30545	Wrench for removing the nut in the electronic part of Siemens injectors
8	DL-UNI50050	Dismantling wrench set, 14,15,17,19 mm hex, 16, 17.5 mm octagon and 27 mm
		wrench for torque handle
9	DL-CR30561	Wrench for dismantling the nut of the Bosch CR injector multiplier, hexagon 10 Wrench
10	DL-UNI31010	for removing the nut in the electronic part of the Bosch injectors 10 mm
11	DL-UNI31012	Wrench for removing the nut in the electronic part of Bosch injectors 12mm
12	DL-AP2	Set of 2 anti-magnetic tweezers DL-AP2







DL-CRN50113

Set of goniometers to control the tightening of the atomizer nut

Contents of delivery:





DL-CRN50107

Protractor for injectors with nut diameter atomizer 17 mm Angle range: 0° - 360°

DL-CRN50110

Protractor for injectors with diameter atomizer nuts 19 mm

Angle range: 0° - 360°



DL-CRN50108

Protractor for injectors with diameter atomizer nuts 21 mm

Angle range: 0° - 360°



All goniometers are for sale also separately.





DL-ST01

Clamping stand for assembling and disassembling CR injectors

Clamping stand for assembling and disassembling CR injectors allows the installation and fixation of the following types of injectors and producers:

- Injectors CR BOSCH CRI/CRIN;
- Injectors CR DENSO ;
- Injectors CR DELPHI
- Injectors Smart ;
- Injectors CR SIEMENS, Continental VDO

Contents of delivery:

- 1. Rack STD50115 1 pc.
- 2. Large vice **STD50116** 1 pc.
- 3. Replaceable foot **STD30498** 2 pcs.
- 4. Guide post **STD30540** 1 pc.
- 5. Small vice **STD50117** 1 pc.
- 6. Stop Ø 7mm **STD30148** 1 pc.
- 7. Stop Ø 9mm **STD30147** 1 pc.
- 8. Replaceable foot **STD30752** 2 pcs.
- 9. Bracket STD30610 1 pc.
- 10. Handle **STD30811** 3 pcs.
- 11. Clamping screw STD30810 1 pc.
- 12. Holder STD30813 1 pc.
- 13. **STD30812** axle 1 pc.



- 14. Retainer **STD30468** 3 pcs.
- 15. Screw M4x8 **Din012** 4 pcs.
- 16. Screw M4x16 Din012 1 pc.
- 17. Screw M4x20 Din012 2 pcs.
- 18. Nut M20 Din034 2 pcs.
- 19. Washer 21x37x3 Din0125 2 pcs.
- 20. Grover 20 Din127 2 pcs.
- 21. Bolt M10x30 Din033 4 pcs.
- 22. Nut M10 Din034 4 pcs.
- 23. Washer 10.5x20x2 Din0125 4 pcs.
- 24. Grover10 Din127 4 pcs.
- 25. Viewfinder for goniometer DL-STD30874
- 26. Axis under the sight DL-STD30873

OPTIONAL CLAMP DL-ST01

DL-STD50072 KIT

Single pump section holder kit (PLD sections) and unit injectors Audi / VW



DL-STD50070 K

Set of single section holders pumps (PLD sections)

Contents of delivery:

1	STD-50077	AT holder
2	STD-50078	speaker holder
3	STD-30671	plank
4	STD-30672	rack
5	STD-30673	emphasis
		_





DL-STD50071 K

Set of holders for unit injectors Audi/VW

Contents of delivery:

1	STD-50009	clip VW2.0
2	STD-50010	clip VW1.9
3	STD-30656	plank
4	STD-30657	stand - 2 pcs.
5	STD-30678	emphasis
6	STD-30658	bolt
7	STD31245	Rack shortened
		UIS - 2 pcs.



DL-STD30874 Viewfinder for goniometer

-



DL-STD30873 Axis under sight





SPARE PARTS FOR CLAMP DL-ST01



STD-30498

Sponges for **DL-ST01** clamping interchangeable universal







STD-30752

Sponges for **DL-ST01** replacement clamps for Denso injectors







OPTIONAL CLAMP DL-ST01





DL-STD50206

Injector holder AUDI / VW 1.9 to adjust el. magnetana clamp ST-01 / ST-02







DL-STD50207

Injector holder AUDI / VW 2.0 to adjust el. magnetana clamp ST-01 / ST-02





DL-CRN50091

Set of adapters with digital indicators

Adapter set with digital dial indicators for assembly gaps measurement and nozzle valve and needle stroke measurement.



Kit includes:

1. DL-CRI 2.1-RLS-N, CRN 30031 BOSCH CR 12.1 injector magnetic gap adapter	1.1	CRN 30032
2. DL-CRI 1-AHE, CRN 50089 Valve travel adapter for injectors BOSCH CRI 1, CF	2.1 RI 2.0/2.2	CRN 30708 , CRIN 1/1.6
3. DL-DENSO016-N, CRN 30033 Denso injector overstroke adapter	3.1	CRN 30034
4. DL-CRI-DNH-N, CRN 30027 BOSCH needle stroke adapter, BOSCH CRI 2.0/2.2	4.1 2 excess	CRN 30028 stroke adapter
5. DL-CRI-RLS-N, CRN 30029 Magnetic gap adapter BOSCH CRI 1, CRI 2.0/2.2, overstroke adapter BOSCHCRI2.0/2.2	5.1 CRIN 1/1	CRN 30030 .6,
6. DL-CRI 2.1-AHE1 CRN 30705 BOSCH CRI 2.1 injector valve stroke adapter indire	6.1 ct measu	CRN 30706 urement
7. DL-CRI 2.1-АНЕ 2, CRN 30707 Адаптер хода клапана инжекторов BOSCH CRI 2	7.1 2.1 прямс	CRN 50007 ой замер
8. DL-VFK-DFK, CRN 30709 BOSCH Atomizer Spring and Armature Spring Adap	8.1 oter for B	CRN 30710 OSCH Injectors
9. DL-CRIN 2/3AHE, CRN 50299 Valve travel and overstroke adapter for BOSCH CR	IN 2, CR	IN 3 injectors
10. Digital measuring head 0-12.7mm, 0.001mm	DL-KIP0 [,]	11
11. Digital measuring head 0-25.4mm, 0.001mm	DL-KIP01	12

12. Allen key 2.5 mm



DL-CRN50092

Set of adapters with digital indicators

Adapter set with digital dial indicators for assembly gaps measurement and nozzle valve and needle stroke measurement.



Катипания в ключает:

	CRI 2.1-RLS-N, CRN 30031 CR 12.1 injector magnetic gap a	1.1 adapter	CRN 30032
	-CRI 1-AHE, CRN 50089 vel adapter for injectors BOSCH	2.1 H CRI 1, CRI 2.0/2.	
	-DENSO016-N, CRN 30033 ector overstroke adapter	3.1	CRN 30034
	-CRI-DNH-N, CRN 30027 needle stroke adapter, BOSCH	4.1 CRI 2.0/2.2 excess	
Magnetic	-CRI-RLS-N, CRN 30029 gap adapter BOSCH CRI 1, C e adapter BOSCHCRI2.0/2.2	5.1 RI 2.0/2.2, CRIN 1/	••••••••
	-CRI 2.1-AHE1 CRN 30705 CRI 2.1 injector valve stroke ad	6.1 apter indirect meas	
	CRI 2.1-AHE 2, CRN 30707 хода клапана инжекторов ВС	7.1 SCH CRI 2.1 прям	••••••••
	VFK-DFK, CRN 30709 Atomizer Spring and Armature S	8.1 Spring Adapter for I	•••••••••
	-CRIN 2/3AHE, CRN 50299 vel and overstroke adapter for I	30SCH CRIN 2, CI	RIN 3 injectors
10. DL-K	IP025MS Digital measuring hea	ad 0-12.7mm, 0.00	1mm (PC connec

11. DL-KIP027MS Digital measuring head 0-25.4mm, 0.001mm (PC connection possible)

12. Allen key 2.5 m

156





DL-CRN50090

Adapter for measuring valve stroke of CRIN 2/3 injectors. Used together with probe DL-CRN30708.

Contents of delivery:

 DL-CRN50090
 adapter CRIN 2/3 — 1 pc.

 DL-CRN30708
 probe - 1 pc.

DL-CRN50299

Адаптер измерения хода клапана и избыточного хода форсунок CRIN 2/3



Contents of delivery:

DL-CR31555	adapter case — 1 pc
DL-CR31527	adapter nut — 1 pc
DL-CRN30708	measuring probe — 1 pc.
DL-CR31556	anchor fixing sleeve — 1 pc



DL-CRN50299KIT

Valve Stroke Measurement Kit and overstroke CRIN 2 / CRIN 3 with collapsible and a non-separable anchor

Contents of delivery

- Digital indicator head **DL-KIP012** 1 pc.
- Adapter case **DL-CR31555** 1 pc.
- Adapter nut **DL-CR31527** 1 pc.
- Measuring probe **CRN30708** 1 pc.
- Fixing bushing with toujon **DL-CR31556** 1 pc.
- L-shaped hex wrench 2.5 for fixing measuring head 1 pc.
- L-shaped hex wrench 1.5 for fixing bushings 1 pc

Attention! Positions are specified according to kit **DL-CRN50091**. Others may also apply indicator measuring heads are of higher quality and more expensive. CIG have the same measuring range (stroke 0-25.4 mm and resolution 0.001 mm). As an example **DL-KIP021**, **DL-KIP026**, **DL-KIP031**. All of them are available upon request.





DL-CRN50299KIT

Kit for measuring the valve stroke (AH) of CRIN 2 / CRIN 3 injectors with detachable and non-demountable armature

Contents of delivery:

DL-CR31586	Base - 1 pc.
DL-CR31583	Height adapter springs - 1 pc.
DL-CR31584	Height adapter washers Ahe - 1 pc.
DL-CR31585	Washer height adapter Rls - 1 pc
DL-CRN30033	Adapter for measuring the height of washers and
	springs - 1 pc.
DL-KIP0036	Indicator digital measuring head with an accuracy
	of 0.001 mm and a stroke of 25 mm - 1 pc



DL-CR50311

Set of tools and adapter for measuring the height of washers and springs CRI1/CRI2

Contents of delivery:

	•
DL-CR31586	Base - 1 pc.
DL-CR31583	Height adapter springs - 1 pc.
DL-CR31584	Height adapter washers Ahe - 1 pc.
DL-CR31585	Washer Height Adapter Rls - 1 pc
DL-CRN30033	Adapter for measuring the height of washers and
	springs - 1 pc.

DL-CR50306

Set of devices for measuring the height of washers and springs of CRI1/CRI2 injectors



Contents of delivery:

DL-CR31586	Base - 1 pc.
DL-CR31583	Height adapter springs - 1 pc.
DL-CR31584	Height adapter washers Ahe - 1 pc.
DL-CR31585	Washer Height Adapter Rls - 1 pc





DL-UNI20150 CRISTINA - PIEZO

The device is designed to test piezo injectors and piezo package.

The device confidently determines all the faults of the piezo package. Identifies problems that similar instruments or stands do not detect. The device was developed for the assembly of Siemens injectors, but it is also efficient with BOSCH injectors.

Device capabilities:

- 1. Signal giving to activate the nozzle on the hand press
- 2. Measurement of the resistance of the piezo package
- 3. Breakdown test on the case
- 4. Measuring the capacity of the piezo package
- 5. Measurement of the smooth running of the piezo package

Contents of delivery:

- 1. Signal generator "CRistina-PIEZO"
- 2. A set of cables to the signal generator "CRistina-PIEZO"
- Power cable 220V
- Main cable for connecting to the piezo package
- Cable adapter universal
- Adapter cable with crocodile clips
- Earthing cable
- 3. Passport (technical description, operating instructions) 1 pc.

ATTENTION ! ADDITIONAL EQUIPMENT ARE POSSIBLE TOGETHER WITH THE DEVICE!





____A_ acoustic testing ____



DL-UNI20150A CRISTINA - PIEZO ACOUSTIC

The device is designed to test piezo injectors and piezo package.

The device confidently determines all the faults of the piezo package. Identifies problems that similar instruments or stands do not detect.

The device was developed for the assembly of Siemens injectors, but it is also efficient with BOSCH injectors.

Device capabilities:

- 1. Signal giving to activate the nozzle on the hand press
- 2. Measurement of the resistance of the piezo package
- 3. Breakdown test on the case
- 4. Measuring the capacity of the piezo package
- 5. Measurement of the smooth running of the piezo package
- 6. Valve opening/closing control with acoustic test
- 7. Precise detection of valve opening and closing with an acoustic test

Contents of delivery:

- 1. Signal generator "CRistina-PIEZO"
- 2. A set of cables to the signal generator "CRistina-PIEZO"
 - Power cable 220V
 - Main cable for connecting to the piezo package
 - Cable adapter universal
 - Adapter cable with crocodile clips
- Earthing cable
- 3. Microphone
- 4. Microphone holder
- 5. Passport (technical description, operating instructions) 1 pc.

ATTENTION ! ADDITIONAL EQUIPMENT ARE POSSIBLE TOGETHER WITH THE DEVICE!







DL-UNI20050 CRISTINA - PIEZO

The device is designed to test piezo injectors and piezo package.

The device confidently determines all the faults of the piezo package. Identifies problems that similar instruments or stands do not detect. The device was developed for the assembly of Siemens injectors, but it is also efficient with BOSCH injectors.





Device capabilities:

- 1. Signal giving to activate the nozzle on the hand press
- 2. Measurement of the resistance of the piezo package
- 3. Breakdown test on the case
- 4. Measuring the capacity of the piezo package
- 5. Measurement of the smooth running of the piezo package

Contents of delivery:

- 1. Controller CRistina-Piezo
- 2. The clamp-holder of injectors Piezo ST-04
- 3.Bracket holder.
- 4. The air meter.
- 5. The air filter.
- 6. The distributive air valve.
- 7. Reducer for air.
- 8. The electronic manometer.
- 9. Set of tubes.
- 10. Quick coupling 6mm.
- 11. Set of 2 nozzles for the backflow of the Siemens VDO injectors
- 12. **DL-CR50157** Set of adapters for measuring f the valve stroke of CR VDO Siemens injector
- (DL-CR50165 for DL-UNI20050-F)
- 13.Connector M12x1,5X1/8"

ATTENTION ! ADDITIONAL EQUIPMENT ARE POSSIBLE TOGETHER WITH THE DEVICE!

It differs from the DL-UNI20050F set in a less complete set of adapters for injectors.





DL-UNI20050F CRISTINA - PIEZO

The device is designed to test piezo injectors and piezo package.

The device confidently determines all the faults of the piezo package. Identifies problems that similar instruments or stands do not detect. The device was developed for the assembly of Siemens injectors, but it is also efficient with BOSCH injectors.







DL-CR50165

Device capabilities:

- 1. Signal giving to activate the nozzle on the hand press
- 2. Measurement of the resistance of the piezo package
- 3. Breakdown test on the case
- 4. Measuring the capacity of the piezo package
- 5. Measurement of the smooth running of the piezo package

Contents of delivery:

- 1. Controller CRistina-Piezo
- 2. Clamp-holder for injectors Piezo ST-04
- 3. Bracket holder for equipment.
- 4. Air meter.
- 5. Air filter.
- 6. Air distribution crane.
- 7. Reducer for air.
- 8. Electronic manometer.
- 9. Set of tubes.
- 10. Coupling of quick connection 6mm.
- 11.Set of 2 fittings for backflow of Siemens VDO injectors
- 12. **DL-CR50165** Set of adapters for measuring the stroke of the injector valve CR VDO Siemens 13. Adapter M12x1.5X 1/8 "

ATTENTION ! ADDITIONAL EQUIPMENT ARE POSSIBLE TOGETHER WITH THE DEVICE!

It differs from the **DL-UNI20050** kit in a more complete set of adapters for injectors.



162

_A_acoustic testing___



DL-UNI20050A CRISTINA - PIEZO ACOUSTIC

The device is designed to test piezo injectors and piezo package.

The device confidently determines all the faults of the piezo package. Identifies problems that similar instruments or stands do not detect. The device was developed for the assembly of Siemens injectors, but it is also efficient with BOSCH injectors.







DL-CR50157

Device capabilities:

- 1. Signal giving to activate the nozzle on the hand press
- 2. Measurement of the resistance of the piezo package
- 3. Breakdown test on the case
- 4. Measuring the capacity of the piezo package
- 5. Measurement of the smooth running of the piezo package
- 6. Valve opening / closing control with acoustic test

Contents of delivery:

- 1. Controller CRistina-Piezo
- 2. Clamp-holder for injectors Piezo ST-04
- 3. Bracket holder for equipment.
- 4. Air meter.
- 5. Air filter.
- 6. Air distribution crane.
- 7. Reducer for air.
- 8. Electronic manometer.
- 9. Set of tubes.
- 10. Coupling of quick connection 6mm.
- 11.Set of 2 fittings for backflow of Siemens VDO injectors
- 12. **DL-CR50157** Set of adapters for measuring the stroke of the valve injector CR VDO Siemens 13.Adapter M12x1.5X 1/8 "
- 14. Microphone
- 15. Microphone holder
- 16. Passport

ATTENTION ! ADDITIONAL EQUIPMENT ARE POSSIBLE TOGETHER WITH THE DEVICE!

It differs from the DL-UNI20050F (A) kit in a less complete set of adapters for injectors.



____A_ acoustic testing ____



DL-UNI20050FA CRISTINA - PIEZO ACOUSTIC

The device is designed to test piezo injectors and piezo package.

The device confidently determines all the faults of the piezo package. Identifies problems that similar instruments or stands do not detect. The device was developed for the assembly of Siemens injectors, but it is also efficient with BOSCH injectors.

CRIstina - Piezo





DL-CR50165

Device capabilities:

- 1. Signal giving to activate the nozzle on the hand press
- 2. Measurement of the resistance of the piezo package
- 3. Breakdown test on the case
- 4. Measuring the capacity of the piezo package
- 5. Measurement of the smooth running of the piezo package
- 6. Valve opening / closing control with acoustic test

Contents of delivery:

- 1. Controller CRistina-Piezo
- 2. Clamp-holder for injectors Piezo ST-04
- 3. Bracket holder for equipment.
- 4. Air meter.
- 5. Air filter.
- 6. Air distribution crane.
- 7. Reducer for air.
- 8. Electronic manometer.
- 9. Set of tubes.
- 10. Coupling of quick connection 6mm.
- 11.Set of 2 fittings for backflow of Siemens VDO injectors
- 12. **DL-CR50165** Set of adapters for measuring the stroke of the injector valve CR VDO Siemens
- 13.Adapter M12x1.5X 1/8 "
- 14. Microphone
- 15. Microphone holder
- 16. Passport

ATTENTION ! ADDITIONAL EQUIPMENT ARE POSSIBLE TOGETHER WITH THE DEVICE!

Differs from DL-UNI20050 (A) kit in more complete set of injector adapters





DL-UNI20051 Комплект с CRistina-PIEZO

Repair kit for piezo injectors CR Siemens / VDO (without clamp for clamping injectors and acoustic test). The device confidently detects all malfunctions of the piezoelectric package. Identifies problems that similar instruments or benches do not detect.

The device was developed for assembling Siemens injectors, but it is also functional with Bosch injectors.





Device capabilities:

- 1. Signal giving to activate the nozzle on the hand press
- 2. Measurement of the resistance of the piezo package
- 3. Breakdown test on the case
- 4. Measuring the capacity of the piezo package
- 5. Measurement of the smooth running of the piezo package

Contents of delivery:

- 1. Controller CRistina-Piezo
- 2. Bracket holder for equipment.
- 3. Air meter.
- 4. Air filter.
- 5. Air distribution crane.
- 6. Reducer for air.
- 7. Electronic manometer.
- 8. Set of tubes.
- 9.Quick coupling 6mm.

10.Set of 2 fittings for backflow of Siemens VDO injectors

11.Adapter M12x1.5X 1/8 "

DL-UNI20051A CRistina-PIEZO kit with acoustic test

Repair kit for piezo injectors CR Siemens / VDO (without clamp for clamping injectors)

ATTENTION ! ADDITIONAL EQUIPMENT ARE POSSIBLE TOGETHER WITH THE DEVICE!



____A_ acoustic testing ____



DL-UNI20051A Комплект с CRistina-PIEZO

Repair kit for piezo injectors CR Siemens / VDO (without clamp for clamping injectors with acoustic test). The device is designed to test the piezo injector of the piezo package. The device confidently detects all malfunctions of the piezoelectric package. Identifies problems that similar instruments or benches do not detect.

The device was developed for assembling Siemens injectors, but it is also functional with Bosch injectors.







Device capabilities:

- 1. Signal giving to activate the nozzle on the hand press
- 2. Measurement of the resistance of the piezo package
- 3. Breakdown test on the case
- 4. Measuring the capacity of the piezo package
- 5. Measurement of the smooth running of the piezo package
- 6. Valve opening / closing control with acoustic test


Contents of delivery:

- 1. Controller CRistina-Piezo
- 2. Bracket holder for equipment.
- 3. Air meter.
- 4. Air filter.
- 5. Air distribution crane.
- 6. Reducer for air.
- 7. Electronic manometer.
- 8. Set of tubes.
- 9. Quick coupling 6mm.
- 10. Set of 2 fittings for backflow of Siemens VDO injectors
- 11. Adapter M12x1.5X 1/8 "
- 12. Microphone
- 13. Microphone holder
- 14. Passport

ATTENTION ! ADDITIONAL EQUIPMENT ARE POSSIBLE TOGETHER WITH THE DEVICE!



ADDITIONAL EQUIPMENT FOR CRISTINA-PIEZO

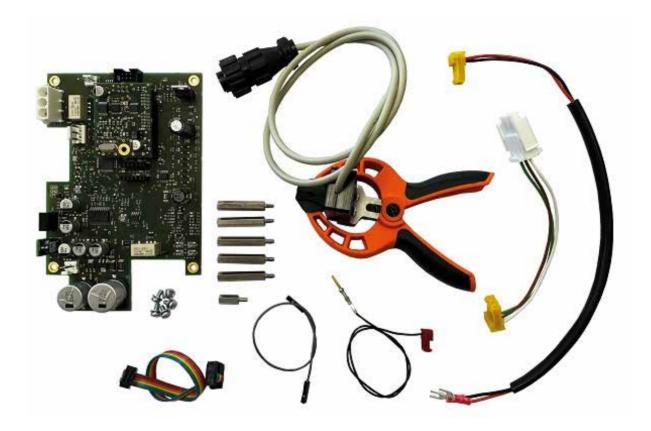

DL-UNI20054 ACOUSTIC BOARD

Acoustic test kit for CRISTINA - PIEZO

The kit includes:

- 1. Microphone in a plastic case
- 2. Clip for fixing the microphone on the nozzle body
- 3. Acoustic test board for installation inside the instrument CRISTINA -PIEZO
- 4. Set of connecting wires
- 5. Set of racks and bolts for fixing the board
- 6. Instructions for assembly.





DL-UNI20052

Injector repair kit CR Siemens VDO (without controller Cristina-Piezo.

Contents of delivery:

- 1. Clamp-holder of nozzles PiezoST-04
- 2. Equipment holder bracket.
- 3. Air meter.
- 4. Air filter.
- 5. Air distribution valve.
- 6. Reducer for air.
- 7. Electronic pressure gauge.
- 8. Set of tubes.
- 9. 6mm quick coupling.
- 10. Set of 2 fittings for reverse Siemens injector drain
- 11. Adapter M12x1.5 X 1/8"



DL-UNI20053

Injector repair kit CR Siemens VDO (without controller CRistina-Piezo and clamps ST-04)

Contents of delivery:

- 1. Equipment holder bracket.
- 2. Air meter.
- 3. Air filter.
- 4. Air distribution valve.
- 5. Reducer for air.

- 6. Electronic pressure gauge.
- 7. Set of tubes.
- 8. 6mm quick coupling.
- 9. Set of 2 fittings for

backflow of SiemensVDO injectors 10. Adapter M12x1.5 X 1/8"

ADDITIONALLY! For kits DL-UNI20051,DL-UNI20052, DL-UNI20053 requires a set of adapters with measuring head DL-CR50157 for 6 pos. or DL-CR50165 for 8 positions





DL-CR50146

Adapter set without indicator head for measurement injector parameters CR VDO Siemens.

Contents of delivery:

- 1. **DL-CR31079** Adapter for testing the piezo package.
- 2. **DL-CR50147** Adapter (body with nut) for measuring valve travel.
- 3. DL-CR31177 Measuring probe
- 4. **D-7153136** Hex key 2mm



DL-CR50157

Adapter kit with indicator head for measuring parameters injectors CR VDO Siemens.

Contents of delivery:

1.	DL-CR31079	Ada
2.	DL-CR50147	Ada
3.	DL-CR31177	Me
4.	D-7153136	He
5	DI -KIP002	Ind

Adapter for testing the piezo package.
Adapter (body with nut) for measuring valve travel.
Measuring probe
Hex key 2mm
Indicator measuring mechanical head with precision 0.001mm, travel 5mm

6. Organizer





DL-CR50165

Adapter set with indicator head for measuring valve travel CR VDO Siemens injectors of all types.

Contents of delivery:

1.	DL-CR31079	Adapter for measuring the parameters of the piezo injector package new type M25x1
2.	DL-CR31179	Adapter for measuring the parameters of the piezo injector package old type M27x1
3.	DL-CR31080	Adapter housing for measuring the stroke of the injector valve
4	DL-CR31081	Nut to body of adapter for measuring valve travel
		nozzles of a new type M25x1
5.	DL-CR31178	Nut to the body of the adapter for measuring the valve travel
		nozzles of a new type M27x1
6.	D-7153136	Hex key 2mm
7.	DL-KIP002	Indicator measuring head mechanical
		0.001mm travel 5mm
8.	DL-CR31177	Measuring probe
~	• •	

9. Organizer

DL-CR50166

Adapter kit without indicator head for measuring valve travel CR VDO Siemens injectors of all types.

The kit is identical to **DL-CR50165**, except for the indicator mechanical measuring head.





Set of adapters and wrenches for repairing CR VDO Siemens injectors

Contents of delivery:

- 1. DL-CR50165 Set of adapters with indicator head for measuring valve travel of the CR VDO Siemens injector of all types.
 - 1. **DL-CR31079** Adapter for measuring the parameters of the piezo injector package new type M25x1
 - 2. **DL-CR31179** Adapter for measuring the parameters of the piezo injector package old type M27x1
 - 3. **DL-CR31080** Adapter housing for measuring the stroke of the injector valve
 - 4 **DL-CR31081** Nut to body of adapter for measuring valve travel nozzles of a new type M25x1
 - 5. **DL-CR31178** Nut to the body of the adapter for measuring the valve travel nozzles of a new type M27x1
 - 6. **D-7153136** Hex key 2mm
 - 7. **DL-KIP002** Indicator measuring head mechanical 0.001mm travel 5mm

 - 8. **DL-CR31177** Measuring probe
 - 9. Organizer

2. DL-CR50163 Wrench for mounting / dismounting the piezo package of CR injectors VDO Siemens.



With the help of an elongated base, this wrench provides convenient work with CR VDO Siemens injectors. The closed zones of the nozzle are excluded and the adjustment of the piezo package is facilitated. Landing dimensions of the key:

a) hexagon for piezo package 25mmb) 1/2" square for torque wrench



3. DL-CR50164 Wrench for mounting / dismounting the piezo package of CR injectors VDO Siemens.



With the help of an elongated base, this wrench provides convenient work with CR VDO Siemens injectors. The closed zones of the nozzle are excluded and the adjustment of the piezo package is facilitated. Landing dimensions of the key:

a) hexagon for piezo package 27mmb) 1/2" square for torque wrench

4. DL-UNI30545 Wrench for mounting / dismounting the multiplier nut SIEMENS injectors



ATTENTION! All keys are sold separately.



DL-CR30843

Key attachment for convenient and safe tube removal piezo injectors (turnkey 27 mm).

Prevents nozzle breakage injector backflow.



DL-RP430

Manufacturer - ZECA (Italy) Flame test chamber (aspirator) nozzle spray.

Allows visual sprayer quality control diesel injectors without harm to health. The device collects the working fluid for reuse.







DL-RP400

Manual press for injector testing with mechanical pressure gauge

Contents of delivery:

- mechanical press 1 pc.
- mechanical pressure gauge 1 pc.
- connecting tube 2 pcs.

DL-RP410 (without pressure sensor)

DL-RP415 (with pressure sensor. 1500 bar)

Manual press for injector testing with electronic pressure gauge

Contents of delivery:

- mechanical press 1 pc.
- connecting tube 2 pcs.
- electronic pressure gauge with cable 1 pc.
- battery charger 1 pc.
- pressure sensor (for **RP 415**) for 1500 bar 1 pc.

DL-RP420	(without pressure sensor)
DL-RP425	(with pressure sensor. 1500 bar)

Manual press for injector testing with 2-channel electronic pressure gauge

Contents of delivery:

- mechanical press 1 pc.
- connecting tube 2 pcs.
- electronic pressure gauge with cable 1 pc.
- battery charger 1 pc.
- pressure sensor (for RP 425) for 1500 bar 1 pc.

DL-RP430

Manufacturer - ZECA (Italy) Flame test chamber (aspirator) nozzle spray Allows for visual inspection performance of diesel i njectors without harm to health. The device is going to work liquid for reuse.







DL-RP500

Manufacturer - ZECA (Italy) Manual press for injector testing with mechanical pressure gauge

Contents of delivery:

- mechanical press 1 pc.
- mechanical pressure gauge 1 pc.
- connecting tube 2 pcs.

DL-RP510	(without pressure sensor)
DL-RP515	(with pressure sensor. 1500 bar)

ZECA hand press for injector testing with electronic pressure gauge

Contents of delivery:

- mechanical press 1 pc.
- connecting tube 2 pcs.
- electronic pressure gauge with cable 1 pc.
- battery charger 1 pc.
- pressure sensor (for RP 515) for 1500 bar 1 pc.

DL-RP520 (without pressure sensor)

DL-RP525 (with pressure sensor. 1500 bar)

ZECA hand press for injector testing with 2-channel electronic pressure gauge

Contents of delivery:

- mechanical press 1 pc.
- connecting tube 2 pcs.
- electronic pressure gauge with cable 1 pc.
- battery charger 1 pc.
- pressure sensor (for **RP 525**) for 1500 bar 1 pc.

DL-UNI20150

CRistina-PIEZO instrument

The device is designed to test piezo injectors and piezo package

Instrument capabilities:

- Sending a signal to activate the nozzle on the hand press
- Piezo resistance measurement
- Case breakdown test
- Measuring the capacitance of a piezo pack
- Measuring the smooth running of a piez

ATTENTION! Hand press not included!

0





MP-250 SASH

Machine for fast and precise valve seat restoration injector multiplier BOSCH Common Rail.

Restoration is achieved by the translational-rotational action of the lap in a special abrasive medium on the seat of the damaged nozzle valve.

Available in 2 versions:

- MP-250 SASH-Z with collet chuck
- MP-250SASH-S with self-locking chuck.
- Vibration mechanism in a protective case.
- Screw adjustment on table height.
- Compactness.

Contents of delivery:

- MPS30515 Lapping at 120 ° 5 pcs.
- MPS30516 Lapping at 124 ° 5 pcs.
- grinding paste diamond ASM 7/5(k)
- grinding paste diamond ASM 5/3 (k)
- grinding paste diamond ASM 3/2 (k)
- DL-MPZ30336 valve holder electromagnetic injectors



A set of lapping diamond pastes for the MP-250 machine DL-ACM3(K) KIT



DL-ACM75KLapping paste diamond fraction 7/5 microns, 25 gr.**DL-ACM53K**Lapping paste diamond fraction 5/3 microns, 25 gr.**DL-ACM32K**Lapping paste diamond fraction 3/2 microns, 25 gr.





DL-MPS31241

Spray body holder piezo injectors BOSCH

Used for hull restoration atomizer of piezo injectors BOSCH. Suitable for lapping machine MP-250 SASH.

Application: Suitable for BOSCH injectors piezo series 0445115





DL-MPS31240 N

Medium soft lap (CM)

for restoring the atomizer housing of CR BOSCH piezo injectors. Sharpening angle 60 degrees. Example: BOSCH CR 04455115





DL-MPS31250 Medium hard lap

для восстановления корпуса распылителя пьезо форсунок CR BOSCH. Угол заточки 60 градусов. Пример: BOSCH CR 04455115





DL-MPS31322

Elbor lap of increased hardness (PT)

for restoring the atomizer housing of CR BOSCH piezo injectors. Sharpening angle 60 degrees. Example: BOSCH CR 04455115



DL-MPS31291

Lapping for the restoration of the valve regulators pressure pumps CR CP-1

Restoration is carried out using a machine lapping of injector valves MP-250 SASH





DL-CR31199

BOSCH CR piezoelectric valve seat retainer during its restoration

- Suitable for piezo injectors BOSCH 0445115
- Adapted for lapping machine SASH MP-250
- It can also be used for machines of other manufacturers.





DL-MPS50173

Restoration Lapping Kit BOSCH Piezo injector valve

The kit includes laps with different angles: 1. DL-MPS31220 (angle 77 gr.) - 7 pcs. 2. DL-MPS31221 (angle 127 gr.) - 7 pcs.

ATTENTION! All laps are also sold separately!



ACCESSORIES FOR MACHINE MP-250



DL-MPS50033	Self-tightening chuck for MP-250S assy	1 pc
DL-MPS30341	Axle (Shaft Ø12) for MP-250S	1 pc
DL-MPS30298	Chuck body for MP-250S	1 pc
DL-MPS30299	Cartridge cover for MP-250S	1 pc
DL-MPS30297	Capture for MP-250S	2 pcs
DL-MPS30364	Cartridge cover (protective) for MP-250S	1 pc
DL-MPS30338	Washer for plastic cover for MP-250S	1 pc
DL-MPS30337	Upper washer for MP-250S	1 pc



DL-MPS30364

Cartridge protective cover





Capture for MP-250S



DL-MPZ30506

plastic pad for MP-250S and MP-250Z



DL-MPS30337

Top washer for MP-250S



DL-MPS30338

Washer for plastic trim for MP-250S





DL-ACM3(K) KIT

Lapping diamond set pastes for the MP-250 machine

DL-ACM75K DL-ACM53K DL-ACM32K Lapping paste diamond. Fraction of grain large 7/5 microns, 25 gr. Lapping paste diamond. Fraction of grain average 5/3 microns, 25 gr. Lapping paste diamond. Grain fraction small 3/2 microns, 25 gr.



DL-CR50112

Set of laps for CR injector valve seat recovery



D-261102

Lapping plate Size: 200X200 mm D-261106

Lapping plate Size: 250X250 mm D-261108

Lapping plate Size: 400X400 mm



DL-UNI50270

Set of holders for grinding washers

Set of holders for grinding washers The set includes two holders with diameters for different washers. We recommend sanding on a special lapping plate





CP-230 Grinding machine for dressing of the laps



- The greatest transverse movement 100mm.
- The greatest longitudinal movement 70mm.
- Width of a working surface of a table 200mm.
- Length of a working surface of a table 90mm.
- Power supply: ~220 B±15%;
- Engin power 0,23 kWt.
- Dimensions (length x width x height), mm 400x280x260
- Weight, kg 21
- Revolutions per minute on the engine: 2760
- Revolutions per minute on the drive shaft: 200



TOM-2









Additional equipment and accessories

DL-UNI20212

Stone abrasive with grain 36

- outer diameter 125 mm
- internal diameter 12.7 mm
- thickness 16 mm
- processing speed 35 m/s

DL-UNI20213

Stone abrasive with grain 60

- outer diameter 125 mm
- internal diameter 12.7 mm
- thickness 16 mm
- processing speed 40 m/s

DL-UNI20214

Stone abrasive with grain 80

- outer diameter 125 mm
- internal diameter 32 mm
- thickness 10 mm
- processing speed 40 m/s

DL-UNI20215

Stone abrasive with grain 120

- outer diameter 125 mm
- internal diameter 12.7 mm
- thickness 16 mm
- processing speed 40 m/s

DL-UNI20218

Stone abrasive with grain 220

- outer diameter 125 mm
- internal diameter 12.7 mm
- thickness 16 mm
- processing speed 40 m/s

DL-UNI20220

Stone abrasive with grain 400

- outer diameter 125 mm
- internal diameter 12.7 mm
- thickness 16 mm
- processing speed 40 m/s



TOM-5

Grinding machine for dressing of the laps and other bodies of revolution





The largest transverse movement	+/-50mm
The largest longitudinal movement	+/-50mm
Angle of rotation of the working carriage	270°
Type of electronic protractor	Absolute
Granularity of abrasive stone (cup)	100 grit
Supply voltage	~ 220 V ± 15%
Power of the electric motor of the main drive	0.2 kW
Maximum power consumption of the machine	0.3 kW
The number of revolutions per minute of the electric motor	0–12000
The number of revolutions per minute of the drive shaft	0–2000
Dimensions (Depth x Width x Height), mm	335x250x300
Dimensions with lamp (Depth x Width x Height), mm	335x250x450
Machine weight (net), kg	22



TOM-5

Additional equipment and accessories



DL-UNI20224

Cup abrasive with grain 80

- •outer diameter 50 mm
- internal diameter 13 mm
- height 32 mm
- processing speed 35 m/s



DL-UNI20225

Stone abrasive with grain 100

- диаметр наружный 125 мм
- диаметр внутренний 12,7 мм
- толщина 16 мм
- скорость обработки 35 м/с



DL-UNI20226

Stone abrasive with grain 200

- outer diameter 125 mm
- internal diameter 12.7 mm
- thickness 16 mm
- processing speed 35 m/s







Contents of delivery:

1.	DL-CR50160	Clamp for pressing pins
		injector valve core.
2.	DL-CR31199	Valve seat holder for BOSCH CR piezo injectors
		during its restoration.
3.	DL-CR50169	Adapter for measuring the stroke of the BOSCH piezo injector valve
4.	DL-MPS31220	Lapping 77 degrees (6 pcs.)
5.	DL-MPS31221	Lapping 127 degrees (6 pcs.)
6.	DL-CR50171	Collet chuck valve holder for BOSCH piezo injectors.
7.	DL-CR31204	Plate N1 for injector valve recovery
		CR BOSCH Piezo
8.	DL-CR31205	N2 plate for injector valve recovery
		CR BOSCH Piezo
9.	DL-KIP002	Indicator measuring head of the clock type.



2



DL-CR50160

Press-in clamp CR injector valve core pins piezo BOSCH.

Suitable for BOSCH piezo series injectors 0445115



DL-CR50169


Adapter for measuring the stroke of the injector valve piezo BOSCH.

Suitable for BOSCH piezo series injectors 0445115

Contents of delivery:


- 1. Adapter DL-CR31201
- 2. Measuring probe DL-CR31206

ATTENTION! The measuring head is not included in the scope of delivery!



DL-CR31204

Lapping plate N1 for valve recovery injectors CR BOSCH Piezo



DL-CR31205

Lapping plate N2 for valve recovery injectors CR BOSCH Piezo





DL-CR50171

Collet chuck valve holder for BOSCH piezo injectors for restoration geometry by lapping.

Suitable for BOSCH piezo series injectors 0445115



DL-CR50209

collet chuck valve holder piezo injectors BOSCH for restoration geometry by lapping.

Suitable for BOSCH piezo series injectors 0445115

The cartridge has a tapered tail and shank diameter 7 mm.

The cartridge can be used both on a desktop drilling machines, as well as grinding machines GR-7300, GR-7400, GR-7500 and also on lapping machines MP-250.



DL-CR50052

Filler hydraulic compensator for Bosch piezo injectors.

Consists of two parts: housings with guides and clamps.



DL-GR7500 Grinding machine for the needles of nozzles



Grinding machine for dressing needles of nozzles with rotation speed indicators

The machine is controlled by PWM controllers.

The control of the speed of rotation of the spindle and the processed body is regulated by means of rotary knobs located on the control panel.

Adjusting the brightness of the lower illumination of the processed body of rotation is performed using the rotary knob located in the upper part of the control panel. The control panel has a general power switch for the machine and three power switches on each electric motor of the corresponding drive and lower lighting bulbs.

On the rear side of the machine body there is a connector for supplying a 220-volt power cable, two 220-volt sockets and a 12-volt connector for connecting a monitor.

On the front side of the machine body there is a 12 volt connector for connecting the electric motor power cable to drive rotation bodies.

The grinding machine **DL-GR7500** can be used in conjunction with the kits: **DL-UNI20025**, **DL-UNI20026**, **DL-UNI20027**, **DL-UNI20030**.

which includes: electronic industrial microscope, tripod holder, top illumination and monitor. This kit is not included in the scope of supply and is available by separate order.



DL-GR7400

Grinding machine for nozzle needles with rotation speed indicators in percent



The **DL-GR7400** machine is used for grinding needles of nozzles and other bodies of rotation. The machine is controlled by PWM controllers.

The control of the speed of rotation of the spindle and the processed body is regulated by means of rotary knobs located on the control panel.

Rotation speed (revolutions) is displayed as a percentage.

Adjusting the brightness of the lower illumination of the processed body of rotation is performed using the rotary knob located in the upper part of the control panel.

The control panel has a general power switch for the machine and three power switches for each electric motor of the corresponding drive and a backlight.

On the rear side of the machine body there is a connector for supplying a 220-volt power cable, two 220-volt sockets and a 12-volt connector for connecting a monitor.

On the front side of the machine body there is a 12 volt connector for connecting the electric motor power cable to drive rotation bodies.

The grinding machine DL-GR7400 can be used in conjunction with the kits: **DL-UNI20025**, **DL-UNI20026**, **DL-UNI20027**, **DL-UNI20030**.

which includes: electronic industrial microscope, tripod holder, top illumination and monitor. This kit is not included in the scope of supply and is available by separate order.



DL-GR7300

Grinding machine for the needles of nozzles with speed indicators



The **DL-GR7300** machine is used for sharpening needles of atomizers and other bodies of rotation. The machine is controlled by PWM controllers.

The control of the speed of rotation of the spindle and the processed body is regulated by means of rotary knobs located on the control panel.

Adjusting the brightness of the lower illumination of the processed body of rotation is performed using the rotary knob located in the upper part of the control panel.

The control panel has a general power switch for the machine and three power switches on each electric motor of the corresponding drive and lower lighting bulbs.

On the rear side of the machine body there is a connector for supplying a 220-volt power cable, two 220-volt sockets and a 12-volt connector for connecting a monitor.

On the front side of the machine body there is a 12 volt connector for connecting the electric motor power cable to drive rotation bodies.

The grinding machine DL-GR7300 can be used in conjunction with the kits: **DL-UNI20025**, **DL-UNI20026**, **DL-UNI20027**, **DL-UNI20030**.

which includes: electronic industrial microscope, tripod holder, top illumination and monitor. This kit is not included in the scope of supply and is available by separate order.



DL-UNI20025

Set with industrial microscope, elongated tripod, light and monitor.

The microscope has a clear image and high resolution.



Technical data:

- 1. The magnification of the microscope: 8x-130x
- 2. Working distance : 50-200mm
- 3. Connect to monitor via ports: HDMI/VGA
- 4. Microscope size (width x length): 40mm x 115mm

Contents of delivery:

- 1. DL-UNI20016 Industrial electronic microscope with power supply (HDMI / VGA / AV).
- 2. DL-UNI20019 Tripod holder extended for microscope
- 3. **DL-UNI20018** Lamp diode for a microscope.
- 4. DL-UNI20021 Monitor
- 5. DL-UNI20022 Dedicated monitor holder on a tripod





DL-UNI20030

Set with industrial microscope, elongated tripod, light and monitor.

The microscope has a clear image and high resolution.



Technical data:

- 1. The magnification of the microscope: 8x-130x
- 2. Working distance : 50-200mm
- 3. Connect to monitor via ports: HDMI/VGA
- 4. Microscope size (width x length): 40mm x115mm

Contents of delivery:

- 1. **DL-UNI20010** Industrial electronic microscope with power supply (HDMI / USB / AV).
- 2. DL-UNI20019 Tripod holder extended for microscope
- 3. **DL-UNI20018** Lamp diode for a microscope.
- 4. DL-UNI20021 Monitor
- 5. DL-UNI20022 Dedicated monitor holder on a tripod





DL-UNI20026

Set with industrial microscope, elongated tripod, light and monitor.

The microscope has a clear image and high resolution.





Technical data:

- 1. The magnification of the microscope: 5x-100x
- 2. Working distance : 50-170mm
- 3. Connect to monitor via ports: HDMI
- 4. Microscope size (width x length): 40mm x 115mm

Contents of delivery:

- 1. **DL-UNI20013** Industrial electronic microscope with power supply and backlight (HDMI / USB).
- 2. DL-UNI20019 Tripod holder extended for microscope
- 3. DL-UNI20021 Monitor
- 4. DL-UNI20022 Dedicated monitor holder on a tripod





DL-UNI20027

Set with industrial microscope, elongated tripod, light and monitor.

The microscope has a clear image and high resolution.



Technical data:

- 1. The magnification of the microscope: 10x-180x
- 2. Working distance : 100-150mm
- 3. Connect to monitor via ports: HDMI
- 4. Microscope size (width x length): 40mm x115mm

Contents of delivery:

- 1. **DL-UNI20014** Industrial electronic microscope with power supply (HDMI / USB / AV).
- 2. DL-UNI20019 Tripod holder extended for microscope
- 3. **DL-UNI20018** Lamp diode for a microscope
- 4. DL-UNI20021 Monitor
- 5. DL-UNI20022 Dedicated monitor holder on a tripod





DL-UNI20031

Microscope kit HDMI USB 1080P FHD 48MP x 200

The microscope has a clear image and high resolution Lens: 200X C-MOUNT magnification



Technical data:

1. Photo / video shooting

2. Additional functions: adding guide lines, image fixation,

mirroring, image rotation, digital zoom

- 3. Housing: aluminum alloy
- 4. Matrix: Panasonic
- 5. Matrix resolution 48 MP
- 6. Frame rate: at 1920*1080 / 60fps
- 7. Outputs: USB, HDMI, TF card, infrared sensor for remote control
- 8. Power supply: DC-12V/1A
- 9. Max TF card capacity: 64G
- 10.HDMI image resolution: 8168*6128 4:3 (50MP) 8168*4592 16:9 (37MP) (for TF card),
- 11. USB image resolution: 1920*1080 (for PC USB)
- 12. Video resolution: 1920*1080/60fps for HDMI, 1920*1080/
- 30fps 1280*720 / 30fps 640*480 / 30fps 320*240 /
- 30 fps for USB
- 13. Video format: MP4
- 14. Picture format: JPG
- 15. Remote control
- 16. Language support: Russian, Chinese, English, French, Spanish, Portuguese,
- German, Italian, Japanese
- 17. Lens: 200X C-MOUNT magnification
- 18. Working distance: 95mm (maximum working distance 16cm)
- 19. Zoom Ratio: 6.5:1

Contents of delivery:

- 1. DL-UNI20023 Microscope electronic promiscuous with block pitaniya (HDMI / USB / AV)
- 2. DL-UNI20019 Tripod holder extended for microscope
- 3. **DL-UNI20018** Lamp diode for a microscope
- 4. DL-UNI20021 Monitor
- 5. **DL-UNI20022** Dedicated monitor holder on a tripod



DL-UNI20032

Set with industrial microscope, elongated tripod, light and monitor.

The microscope has a clear image and high resolution Lens: 180X C-MOUNT magnification





Technical data:

- 1. Photo / video shooting
- 2. Additional functions: adding guide lines, image fixation,
- mirroring, image rotation, digital zoom
- 3. Housing: aluminum alloy
- 4. Matrix: Panasonic
- 5. Matrix resolution 37.0 MP
- 6. Frame rate: at 1920*1080 / 60fps
- 7. Outputs: USB, HDMI, TF card, infrared sensor for remote control
- 8. Power supply: DC-12V/1A
- 9. Max TF card capacity: 64G
- 10.HDMI image resolution: 8168*6128 4:3 (50MP) 8168*4592 16:9 (37MP) (for TF card),
- 11. USB image resolution: 1920*1080 (for PC USB)
- 12. Video resolution: 1920*1080/60fps for HDMI, 1920*1080/
- 30fps 1280*720 / 30fps 640*480 / 30fps 320*240 /
- 30 fps for USB
- 13. Video format: MP4
- 14. Picture format: JPG
- 15. Remote control
- 16. Language support: Russian, Chinese, English, French, Spanish, Portuguese,
- German, Italian, Japanese
- 17. Lens: 180X C-MOUNT magnification
- 18. Working distance: 95mm (maximum working distance 16cm)
- 19. Zoom Ratio: 6.5:1

Contents of delivery:

- 1. **DL-UNI20011** Industrial electronic microscope with power supply (HDMI / USB / AV).
- 2. DL-UNI20019 Tripod holder extended for microscope
- 3. DL-UNI20018 Lamp diode for a microscope
- 4. DL-UNI20021 Monitor
- 5. **DL-UNI20022** Dedicated monitor holder on a tripod





DL-UNI20200 Stone abrasive with grain 400

DL-UNI20201 Stone abrasive with grain 200

DL-UNI20202 Stone abrasive with grain 100









DL-GR60007

Diamond pencil for grooving abrasive stones (standard)



DL-GR60008

Diamond pencil for grooving abrasive stones (reinforced)



DL-NG31309

Editing pencil abrasive wheel (needle)









DL-GR1050 Stone holder (mandrel)

DL-GR1060

Axle for stone balancing (Gem with holder not included)





DL-GR1070

Balancing device (Gem with holder not included)





DL-NG50196

Stone remover with mandrel with spindle taper.



DL-NG50194

Set of drive pulleys for machine tools GR-7300, GR-7400, GR-7500. Material: polyurethane

Package Included:

1. DL-NG31264 Pulley Ø15x3 for atomizer nee
--

2. DL-NG31264-01 Pulley Ø15x4 for atomizer needle

3. DL-NG31264-02 Pulley Ø15x5 for holder piezo injector valve

4. DL-NG31196 Pulley Ø15x7 for lapping

Attention! All pulleys are also sold separately!







DL-GR1080

Angle measuring kit

Contents of delivery:

- 1. Protractor electronic
- 2. Protractor bracket
- 3. Protractor axis NG31249
- 4. A set of M4 screws 3 pcs.

Specifications:

- 1. Measuring range: 0-360 degrees
- 2. Graduation: 0.1 degree
- 3. Accuracy : +-0.2 degree
- 4. Accuracy : 0.1 degree
- 5. Battery: 3V CR20032
- 6. Battery life: 1 year



DL-NG31263

Gauge for setting the angle of 60 degrees



DL-NG31253

Valve holder (pin) injectors BOSCH piezo to polish it







DL-GR1090

Measurement kit angles of increased accuracy


Contents of delivery:

- 1. Protractor electronic
- 2. Protractor bracket
- 3. Protractor axis NG50205
- 4. A set of M4 screws 2 pcs.

Specifications:

- 1. Measuring range: 0-360 degrees
- 2. Division value: 0.005 degrees (10 seconds)
- 3. Accuracy: +-0.2 degree
- 4. Accuracy: 0.08 degree (±30 seconds)
- 5. Working temperature range: 0 ÷40°C
- 6. Battery: 3V CR20032
- 7. Battery life: 1 year

On two lines at the same time the measurement value is displayed in decimal degrees (upper line) and in seconds (bottom line)

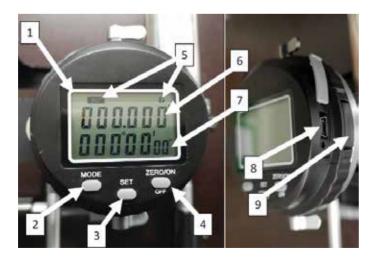

1.Display
 2. MODE button
 3. "SET" button
 4. "ZERO / ON-OFF" button
 5. Display selected
 measuring range
 (360°, 180° x 2, 90° x 4)
 6. Display angle in decimal
 fractions of a degree.
 7. Display in degrees, minutes
 and seconds.
 8.USB socket
 9. Retractable battery slot





DL-NG50201

Prisms with electric motor assembly

Contents of delivery:

- 1. DL-NG50200 Prisms assemblies
- 2. DL-NG31189 platform
- 3. DL-NG50199 electric motor assembly
- 4. **DL-NG31246** Pencil holder for editing (no pencil)
 - DL-NG31309 Editing pencil
- 5. **DL-NG31290** Stop extension bracket
- 6. DL-NG31183 stop bracket standard



DL-NG50200 Prisms with holder assembly



DL-NG31189

Mounting platform prisms, electric motor and bracket with pencil for straightening stone.



DL-NG50199

Electric motor 12 volt 1000 rpm with protective cover with mounting bracket and pulley.



DL-NG31246

Editing pencil holder abrasive stone (no pencil). **DL-NG31309** Straightening Pencil abrasive wheel.



DL-NG31290

stop extension for installation of long details for their grinding.



DL-NG31183

stop bracket workpiece with standard length





GM-08

Surface grinding machine with bottom movable desktop.

Designed for grinding shims, nozzle ends and other parts of fuel equipment.



Specifications:

Motor power	0.37 kW
Value of division	1 µm
Working stroke of the stone	35 mm
Height length Width	505 / 370 / 340 mm
Supply voltage	~220 V ±15%
Tolerance of parallelism of the surface of the workpiece	0,002-0,004 mm
The weight	60 kg





2

SPARE PARTS AND ACCESSORIES K SURFACE GRINDING MACHINE GM-08



DL-UNI20205

Grinding stone for GM-08 straight, seating diameter 20mm, outer diameter 100mm at 80grit

DL-UNI20206

Grinding stone for GM-08 straight, seating diameter 20mm, outer diameter 100mm at 60 grit

DL-UNI20207

Grinding stone for GM-08 straight, seating diameter 20mm, outer diameter 100mm at 40 grit



DL-UNI20208

Grinding stone for GM-08 conical, landing diameter 32mm, outer diameter 125mm at 80 grit



DL-GM50248

mandrel stone holder for modernized machines GM-08



DL-GM31280

Drive shaft with taper fit under the mandrel for the modernization of machines GM-08, issued before 04.2020.



DL-GM50263

Stone puller with mandrel with cone shaft.



MGM-500

Surface grinding machine with moving column

Machine **MGM-500** is designed for grinding shims and other elements and bodies of revolution when they are fixed with a magnetic plate or clamps.



The design of the machine includes:

- The base housing in which the gearbox for the vertical movement of the column with grinding stone
- Electric motor with direct drive of the grinding cup
- Powerful magnet for grinding washers
- High-precision vise for trimming parts
- Protective cover
- Handle for vertical movement of the column
- Rotary handle
- Protective corrugation
- Indicator head with 0.001mm pitch
- Bracket with a cutter for straightening a stone is mounted on a protective cover

Specifications:

Vertical movement of the column	40 mm
Vise Width	50 mm
vise stroke	65 mm
stone grain	80 grit
Supply voltage	~220 V ±15%
Motor power	0.5 kW
Height length Width	310x260x450
Machine weight	43 kg
The number of revolutions per minute of the electric motor	2800 / 3600
Tolerance of parallelism of the surface of the workpiece	0,003-0,006 mm





DL-CR50167

Set of CR injector holders for vise

The block has undergone heat treatment, which increases many times its service life.

Contents of delivery:

DL-CR31054	Universal block for vise with groove dimensions 11,12,13,19mm for installation
	injectors CR BOSCH and DELPHI.
DL-CR31055	Universal block for vise with groove sizes 14,16,20 mm for installation
	injectors CR VOLVO, Fiat Dukato, BMW (similar to SIRINI AB0122-02)
DL-CR31056	Universal block for vise with groove sizes 15,17,18,22 mm for installation
	injectors CR (similar to SIRINI AB0122-03)
DL-CR31158	Universal block for vise with groove sizes 13, 15, 18, 22 mm for installation
	injectors CR PIEZO SIEMENS and BOSCH



DL-CR50158

Set of CR injector holders for vices.

The blocks have been heat treated, which increases many times their service life.

Contents of delivery:

DL-CR31054	Universal block for vise with groove dimensions 11,12,13,19mm for installation
	injectors CR BOSCH and DELPHI.
DL-CR31055	Universal block for vise with groove sizes 14,16,20 mm for installation
	injectors CR VOLVO, Fiat Dukato, BMW (similar to SIRINI AB0122-02)
DL-CR31056	Universal block for vise with groove sizes 15,17,18,22 mm for installation
	injectors CR (similar to SIRINI AB0122-03)





DL-CR31054

Universal block for vise with slot sizes 11, 12, 13.19mm for installation of CR BOSCH injectors and DELPHI. (similar to BOSCH 0986612786, analogue SIRINI AB0122-01) The block has undergone heat treatment, which increases many times its service life.



DL-CR31055

Universal block for vise with slot sizes 14, 16, 20 mm for installation of CR VOLVO injectors, FiatDukato, BMW (similar to SIRINI AB0122-02) The block has undergone heat treatment, which increases many times its service life.







DL-CR31056


Universal block for vise with slot sizes 15, 17, 18, 22 mm for mounting CR injectors (similar to SIRINI AB0122-03) The block has undergone heat treatment, which increases many times its service life.

DL-CR31058

Universal block for vise with slot sizes 13, 15, 18, 22 mm for installation of CR BOSCH piezo injectors and Siemens The block has undergone heat treatment, which increases many times its service life.







DL-UNI50043

Universal fixture for clamps in the vise of CR injectors

Clamps in two positions:

- spray up;
- spray down.





DL-UNI50032

Universal fixture for clamp in the vise of CR Denso injectors

Clamps in two positions:

- spray up;
- spray down.





DL-CR31093

Wrench for dismantling the injector solenoid DENSO, CAT, PERKINS

Key Features:

- 1. The key has 12 faces.
- 2. Distance between faces27,5mm
- 3. Connecting square 1/2"

Analog SIRINI AC0529-00



DL-UNI50046

Three-pin wrench for disassembly and Denso injector assembly.

Completeness:

- key;
- guide nut;
- drift;
- 3 additional pins.

Technological holes are provided in the key, through which you can knock out broken or worn pins and install new pins.



DL-NG50194

Set of wrenches for mounting / dismounting nuts in electronic part of BoschCR injectors.

Contents of delivery:

DL-CR30543	Wrench 10-17 for mounting/dismounting the multiplier nut for BOSCH CR injectors,
	hexagon 10 mm with internal Ø7.5 mm wrench 17
DL-CR30558	Wrench for mounting / dismounting the nut in the electronic part of the BOSCH CR injectors,
	10 mm hexagon with □1/2" square for torque wrench
DL-CR30561	Wrench 10-13 for mounting / dismounting the multiplier nut for BOSCH CR injectors,
	hexagon 10 with internal Ø7.5 mm for a torque wrench
DL-CR30393	Wrench for mounting / dismounting the nut in the electronic part of the Bosch CR injectors





DL-UNI50058

Wrench 32 with teeth for mounting / dismounting the nozzle nut DELPHI trucks.



DL-CR30545

Wrench for mounting / dismounting the multiplier nut SIEMENS injectors



DL-UNI30434

Wrench for mounting / dismounting the nut of the solenoid injectors CR with dodecahedron 27 mm



DL-UNI30435

Wrench for mounting / dismounting the nut of the solenoid injectors CR with dodecahedron 28 mm



DL-UNI30389

Wrench for mounting / dismounting the solenoid nut CR injectors with hexagon 29 mm



DL-UNI30390

Wrench for mounting / dismounting the nut of the solenoid injectors CR with hexagon 30 mm



DL-CR31092

Allen key 7/8 for mounting / dismounting CR injector solenoid inner ring nut Denso. Connecting square 1/2







DL-UNI50050

A set of keys designed for tightening the CR injector nozzle nut any manufacturers (BOSCH, DELPHI, DENSO, Siemens).

Includes: hexagons for 14, 15, 17, 19 mm, octahedrons 16, 17.5 mm and a 27 mm wrench for a torque handle.

DL-UNI30384

socket wrench with hexagon socket by 14 mm

DL-UNI30385

socket wrench with hexagon socket by 15 mm

DL-UNI30386

socket wrench with hexagon socket by 17 mm

DL-UNI30387

socket wrench with hexagon socket by 19 mm

DL-UNI30388

Key socket with internal octagon by 16 mm

DL-UNI30692

Key socket with internal octagon at 17.5 mm

DL-UNI30382

Allen key 27 mm with square hole for torque arm



210



DL-UNI50054

A set of keys designed for tightening the CR injector nozzle nut any manufacturers (BOSCH, DELPHI, DENSO, SIEMENS).

Includes: hexagons with collar 14, 15, 17, 19 mm, octahedrons with collar 16, 17.5 mm and a 27 mm wrench for a torque handle.





DL-UNI30460

Nozzle wrench with inner collar hexagon 14 mm

DL-UNI30461

Nozzle wrench with inner collar hexagon 15 mm



DL-UNI30459

Nozzle wrench with shoulder internal octagon 16 mm

DL-UNI30462

Nozzle wrench with inner collar hexagon 17 mm





DL-UNI30691

Nozzle wrench with inner collar 17.5 mm octagon

DL-UNI30463

Nozzle wrench with inner collar hexagon 19 mm

DL-UNI30382

Allen key 27 mm with square hole for torque arm





DL-CR50261

Mounting wrench set / dismantling the atomizer nut for piezo injectors BOSCH, VDO (Siemens) and BOSCH series 111



DL-UNI30461

Nozzle wrench with inner collar hexagon 15 mm



DL-UNI31442

Nozzle wrench for mounting / dismounting the atomizer nut injectors BOSCH 0445118 The key has 7 faces inside. A 27mm wrench is used. Made from high quality tool steel with subsequent heat treatment.

DL-UNI30459

Nozzle wrench with shoulder internal octagon 16 mm



DL-UNI31395

Nozzle wrench for mounting / dismounting the atomizer nut injectors BOSCH 0445118 The key has 8 protrusions inside. A 27mm wrench is used. Made from high quality tool steel with subsequent heat treatment.



DL-UNI31394

Nozzle wrench for mounting / dismounting the atomizer nut nozzles VDO (SIEMENS) PCRs5 Has an internal 9-sided face. A 27mm wrench is used. Made from high quality tool steel with subsequent heat treatment.





DL-UNI31435


Nozzle wrench for mounting / dismounting the atomizer nut injectors BOSCH 111 series. The key has 10 projections inside. Used turnkey 27mm. Made from high quality tool steel with subsequent heat treatment. Durability is guaranteed.

DL-UNI30382

Allen key 27 mm with square hole for torque arm



212





DL-UNI30460

hexagon 14 mm

Mounting wrench set / dismantling the nozzle spray nut Common Rail BOSCH, VDO (Siemens), DENSO, DELPHI of all types.





DL-UNI30461 Nozzle wrench with inner collar hexagon 15 mm

Nozzle wrench with inner collar

DL-UNI30462

Nozzle wrench with inner collar hexagon 17 mm



DL-UNI30814

socket wrench with hexagon socket 18 mm for BOSH electromagnetic injectors

DL-UNI30463

Nozzle wrench with inner collar hexagon 19 mm





DL-UNI31442

Nozzle wrench for mounting / dismounting the atomizer nut injectors BOSCH 0445118 The key has 7 faces inside. A 27mm wrench is used. Made from high quality tool steel with subsequent heat treatment.

DL-UNI31288

Key socket with internal octahedron 15 mm for BOSH electromagnetic injectors








DL-UNI30459

Nozzle wrench with shoulder internal octagon 16 mm



Nozzle wrench with inner collar 17.5mm octagon



DL-UNI31395

Nozzle wrench for mounting / dismounting the atomizer nut injectors BOSCH 0445118 The key has 8 protrusions inside. A 27mm wrench is used. Made from high quality tool steel with subsequent heat treatment.



DL-UNI31394

Nozzle wrench for mounting / dismounting the atomizer nut nozzles VDO (SIEMENS) PCRs5 Has an internal 9-sided face. A 27mm wrench is used. Made from high quality tool steel with subsequent heat treatment.



DL-UNI31435

Nozzle wrench for mounting / dismounting the atomizer nut injectors BOSCH 111 series. The key has 10 projections inside. A 27mm wrench is used. Made from high quality tool steel with subsequent heat treatment. Durability is guaranteed.



DL-UNI30382

Allen key 27 mm with square hole for torque arm





DL-UNI50105

Set of hex wrenches for 25,27,29,30 mm square hole for dyno handle or wrench 1/2"



DL-UNI30803

24 mm hex wrench with square hole for torque arm or wrench 1/2"



DL-UNI30382

27 mm hex wrench with square hole for torque arm or wrench 1/2"



DL-UNI30541

29 mm hex wrench with square hole for torque arm or wrench 1/2"



DL-UNI30625

30 mm hex wrench with square hole for torque arm or wrench 1/2"





DL-CR30814

Nut wrench (18) for mounting / dismounting CR SCANIA injector nozzle nuts 1881565 The key has 6 faces with a width of 18mm

DL-CR30816

Wrench 2V for mounting / dismounting the nut injector solenoid CR SCANIA 1881565

DL-CR30815

Wrench 16Z for mounting / dismounting the toothed nut injector CR SCANIA 1881565

DL-CR50119

Set of keys for disassembly / injector assembly CR SCANIA 1881565

Kit includes:

- key DL-CR30814
- key DL-CR30815
- key DL-CR30816

DL-CR30843

Key - nozzle for convenient and safe dismantling the piezo injector tube (turnkey 27 mm). Prevents breakage of the return fitting drain nozzle





DL-UIS30767

Nozzle test adapter CR injectors Delphi Smart(1725282).



DL-UNI50039

Wrench for mounting / dismounting the spray nut Ø 20.9 mm Delphi Smart nozzles (for torque wrench)



DL-UNI50131

Wrench for mounting / dismounting the spray nut Ø 25.8mm nozzles CR Bosch (for torque wrench)



DL-CR31095

Wrench for mounting / dismounting the internal ring-nuts for Denso, CAT, Perkins injectors.



DL-CR50148

Valve Installer CRIN injectors



DL-CR50154

Valve removal tool injector multiplier CRIN M19 x 0.75mm





DL-CR50104

Seal removal and installation kit rings and valve settings for CR injectors

DL-CR31553	Pusher (Ø 9.4mm x 7.4mm) for installation
	O-ring for BOSCH CRIN 3-18 injectors
DL-CR30756	Guide sleeve (Ø 10mm)
DL-CR30755	Pusher for valve installation (Ø 15.5mm)
DL-CR30753	Extractor for old O-rings
Organizer.	



DL-CR50298

Seal removal and installation kit rings and valve settings for CR injectors

DL-CR31553Pusher (Ø 9.4mm x 7.4mm) for installationO-ring for BOSCH CRIN 3-18 injectorsDL-CR30756Guide sleeve (Ø 10mm)DL-CR30755Pusher for valve installation (Ø 15.5mm)DL-CR30754Pusher (Ø 10mm x 7.6mm) for installationO-ring for BOSCH CRI injectorsExtractor for old O-ringsOrganizer.Extractor for old O-rings

DL-CR50172

Set of accessories for installing paronite CRIN injector rings

DL-CR50153

Contents of delivery:





Device for installing paronite CRIN injector rings Collet outer diameter 6.5mm Connecting thread M18x0.75mm Analog BOSCH 0986613648 Analog SIRINI AAZ034-648

DL-CR50155

Device for installing paronite CRIN injector rings Collet outer diameter 7.5mm Connecting thread M18x0.75mm Analog BOSCH 0986613646 Analog SIRINI AAZ034-646

DL-CR50170

Device for installing paronite CRIN injector rings Collet outer diameter 7.5mm Connecting thread M17x1mm Analog BOSCH 0986613640 Analog SIRINI AAZ034-640

ATTENTION! All fixtures are sold separately.





DL-CR50308

Adapter for pressing in O-rings injectors CRI1/CRI2 Consists of guide nut **DL-CR31579** and pusher **DL-CR31578**.





Extractor (collet) for dismantling valve seats CRI/CRIN1



DL-CR50317

Needle extractor nozzle sprayer

DL-CR50245

Filter extraction and installation kit injectors DENSO CR



Contents of delivery:

- 1. M14 adapter 2 pcs.
- 2. M12 adapter 2 pcs.
- 3. Collet clamp 1 pc.
- 4. Collet for collet clamp 1 pc.
- 5. Threaded stud 2 pcs.
- 6. Tap 2 pcs.
- 7. Extractor for extracting the filter 1 pc.
- 8. Pusher for filter installation 1 pc.



AZ0037-01

Set of cutters for cleaning engine seats injectors Delphi, Bosch





AZ0037-01

Set of cutters for cleaning engine seats injectors Delphi, Bosch

Applicability:

- Bosch common rail Piezo
- Common Rail Daily
- Volkswagen Audi injectors
- nozzles Tector and Man







D-07147122

Torque wrench 1/2" 25-100 Nm



D-07147121

Torque wrench 3/8"



D-07147120

Torque wrench 1/4" 0-20 Nm



DL-UNI30776 Adapter with 1/4" internal square and outer square 1/2"



DL-UNI31593

Adapter with vnutr. 3/8" square and outer square 1/2"



dieselland.ru | dieselland.biz | dieselland@mail.ru

2

EQUIPMENT and TOOLS for repairing common rail injectors



DL-UNI50049

Puller for extracting CR injectors Bosch from the engine head.

There are two ways to remove injectors: using a hydraulic jack and using reverse hammer.

DL-CR50197

Puller (device for dismantling) BOSCH injectors from the engine.

Suitable for extracting injectors BOSCH with internal thread M17x1 and external thread M27x1

There are two ways to remove injectors: with the help of a hydraulic jack and with the help of reverse hammer.



Internal puller for CR injectors with thread M17x1 and M14x1.5

DL-CR31077

Puller for CR injectors with internal thread M14x1.5 and external thread M14x1.5





DL-CR30984

Internal puller for injectors CR Denso 23670-OR010 Threaded M20x1 and M14x1.5

DL-CR30990

Internal puller for injectors CR Siemens with M25x1 and M14x1.5 threads

DL-UNI50060 Impact puller 340 mm long

DL-CR50059

Puller for CR injectors with M27x1 thread



Puller for removing DENSO injectors from the engine

D-CER50500

Non-stick ceramic paste Pasta in a tube 50 gr.





TESTER V

 \mathbf{e}

DL-UNI50062

Measurement adapter compression in diesel engines (M12x1.5; stem L=175 mm).

Installed in place of the injector. *The pressure sensor is not included.*

DL-UNI20008

Compression test kit in diesel engines.

Kit includes:

- adapter DL-UNI50062 1 pc.
- Pr-tester 1pc;
- cable for pressure sensor 1 pc.

The pressure sensor is not included. *Appearance and scope of delivery subject to change to improve equipment performance

DL-UNI20000

Compression test kit in diesel engines.

Kit includes:

- adapter DL-UNI50062 1 pc.
- Pr-tester 1pc;
- cable for pressure sensor 1 pc.
- pressure sensor up to 1500 bar



DL-WT04A3021

Fuel pressure measuring kit in the low pressure line in diesel and gasoline engines.

Measuring range 0-140 psi (0-10 bar)





DL-KIP0001

Mechanical dial gauge Characteristics :

- Type mechanical
- Stroke 10mm
- Resolution 0.01 mm
- Repeatability 0.01 mm



DL-KIP0002

Mechanical dial gauge Characteristics :

- Type mechanical
- Stroke 5 mm
- Resolution 0.001 mm
- Repeatability 0.001 mm



DL-KIP0003

Mechanical dial gauge Characteristics :

- Type mechanical
- Stroke 5 mm
- Resolution 0.01 mm
- Repeatability 0.02 mm



DL-KIP0004

Mechanical dial gauge Characteristics :

- Type mechanical
- Stroke 10 mm
- Resolution 0.01 mm
- Repeatability 0.02 mm



DL-KIP0005

Mechanical dial gauge Characteristics :

- Type mechanical
- Stroke 20 mm
- Resolution 0.01 mm
- Repeatability 0.03 mm





DL-KIP0006

Mechanical dial gauge Characteristics :

- Type mechanical
- Type mechanic
 Stroke 30mm
- Resolution 0.01 mm
- Repeatability 0.03 mm



DL-KIP0007

Mechanical dial gauge Characteristics :

- Type mechanical
- Stroke 50 mm
- Resolution 0.01 mm
- Repeatability 0.04 mm



DL-KIP0008

Indicator measuring head Characteristics :

- Type mechanical
- Stroke 25 mm
- Resolution 0.01 mm
- Repeatability 0.02 mm



DL-KIP0010

Indicator measuring head Characteristics :

- Type electronic
- Stroke 12.7mm
- Resolution 0.01 mm
- Repeatability 0.01 mm
- Sleeve 8 mm
- Automatic shutdown



DL-KIP0011

Indicator measuring head Characteristics :

- Type electronic
- Stroke 12.7mm
- Resolution 0.001 mm
- Repeatability 0.004 mm
- Sleeve 8 mm
- Automatic shutdown





DL-KIP0012

Indicator measuring head Characteristics :

- Type electronic
- Stroke 25 mm
- Resolution 0.001 mm
- Repeatability 0.004 mm
- Sleeve 8 mm
- Automatic shutdown

DL-KIP0015 Limit

Indicator measuring head Characteristics :

- Type electronic
- Stroke 12.5 mm
- Resolution 0.01 mm
- Repeatability 0.03 mm
- Sleeve 8 mm
- Automatic shutdown

DL-KIP0016 Limit


Indicator measuring head Characteristics :

- Type electronic
- Stroke 12.5 mm
- Resolution 0.001 mm
- Repeatability 0.004 mm
- Sleeve 8 mm
- Automatic shutdown

DL-KIP0019 TESA

Indicator measuring head Characteristics :

- Type electronic
- Stroke 12.7mm
- Resolution 0.01 mm
- Repeatability 0.01 mm
- Sleeve 8 mm
- Automatic shutdown



Indicator measuring head Characteristics :

- Type electronic
- Stroke 12.7mm
- Resolution 0.001 mm
- Repeatability 0.002 mm
- Sleeve 8 mm
- Automatic shutdown



227







DL-KIP0021 TESA

Indicator measuring head

- Characteristics :
- Type electronic
- Stroke 25 mm
- Resolution 0.001 mm
- Repeatability 0.002 mm
- Sleeve 8 mm
- Automatic shutdown





DL-KIP0023 Dieselland

Measuring communication key PC heads

DL-KIP0025 Eee

Indicator measuring head Characteristics :

- Type electronic
- Stroke 12.7mm
- Resolution 0.001 mm
- Repeatability 0.002 mm
- Sleeve 8 mm
- Automatic shutdown

DL-KIP0026 Eee

Indicator measuring head

- Characteristics :
- Type electronic
- Stroke 25 mm
- Resolution 0.001 mm
- Repeatability 0.004 mm
- Sleeve 8 mm
- Automatic shutdown

DL-KIP0028

Measuring communication key PC heads

Eee






DL-KIP0029 SHAHE

Indicator measuring head

- **Characteristics :**
- Type electronic
- Stroke 12.7mm • Resolution - 0.001 mm
- Repeatability 0.002 mm
- Sleeve 8 mm
- Automatic shutdown
- Communication with a PC using a COM port (cable included)

SHAHE





DL-KIP030

- Type electronic • Stroke - 12.7mm
- Resolution 0.001 mm • Repeatability - 0.002 mm
- Sleeve 8 mm
- Automatic shutdown



DL-KIP0031

SHAHE

Indicator measuring head **Characteristics :**

- Type electronic
- Stroke 25 mm
- Resolution 0.001 mm
- Repeatability 0.004 mm
- Sleeve 8 mm
- Automatic shutdown



DL-KIP0032 Eee

Indicator measuring head **Characteristics :**

- Type electronic
- Stroke 50 mm
- Resolution 0.001 mm
- Repeatability 0.005 mm
- Sleeve 8 mm
- Automatic shutdown







DL-KIP0034

Indicator digital measuring head with an accuracy of 0.01 mm, stroke 12.5 mm Characteristics :

- Type electronic
- Resolution 0.01mm
- Accuracy 0.01mm
- Large, high contrast LCD display
- Carbide tip, thread M2.5
- Sleeve 8mm
- Automatic shutdown
- Case Ø 60mm

DL-KIP0035

Indicator digital measuring head with an accuracy of 0.001 mm, stroke 12.5 mm Characteristics :

- Type electronic
- Measuring range 12.7mm
- Resolution 0.001mm
- Accuracy 0.002mm
- Large, high contrast LCD display
- Carbide tip, thread M2.5
- Sleeve 8mm
- Automatic shutdown
- Case Ø 60mm

DL-KIP0036

Indicator digital measuring head with an accuracy of 0.001 mm, stroke 25mm Characteristics :

- Type electronic
- Measuring range 25.4mm
- Resolution 0.001mm
- Accuracy 0.004mm
- Large, high contrast LCD display
- Carbide tip, thread M2.5
- Sleeve 8mm
- Automatic shutdown
- Case Ø 60mm



230

DL-KIP0037

Digital thickness gauge 0-12.7 mm, 0.001 mm Characteristics :

- Measuring range 0-12.7 mm
- Resolution 0.001 mm
- LCD display
- Automatic shutdown
- Case Ø 57 mm







DL-KIP0250

Magnetic stand for mounting indicator measuring head

The stand base has high magnetic properties, which allows installation both on horizontal as well as vertical surfaces.

ATTENTION!

The measuring head is not included in the scope of delivery!



DL-KIP0251

Magnetic stand for mounting indicator measuring head

The stand base has high magnetic properties, which allows installation both on horizontal as well as vertical surfaces.

ATTENTION! The measuring head is not included in the scope of delivery!





DL-STC150 digital caliper



DL-M030

(limited quantity) Digital micrometer

Measuring range 0-25mm Measurement accuracy 0.001mm



DL-M035

Digital micrometer

Measuring range 0-25mm Measurement accuracy 0.001mm



DL-M040

D-SDM tripod for digital micrometer



D-DMTS-KIT

(limited quantity) Kit DL-030 with DL-040. Tripod and digital micrometer



ВСПОМОГАТЕЛЬНОЕ ОБОРУДОВАНИЕ и ИНСТРУМЕНТ для проверки и ремонта ДТА





AUXILIARY EQUIPMENT and TOOLS for checking and repairing DTA





DL-AP2

Set of 2 anti-magnetic tweezers




High magnification lens backlit




DL-MO optical microscope





Digital microscope





Set with industrial microscope, tripod and lighting.

The microscope has a clear image and high resolution.







Technical data:

- 1. The magnification of the microscope: 8x-130x
- 2. Working distance : 50-200mm
- 3. Connecting to a monitor via ports: (HDMI/VGA).
- 4. Microscope size (width x length): 40mm x 115mm

Contents of delivery:

- 1. **DL-UNI20016** Industrial electronic microscope with power supply (HDMI / VGA).
- 2. **DL-UNI20017** tripod holder for microscope
- 3. **DL-UNI20018** Lamp diode for a microscope.





Set with industrial microscope, extended tripod and backlight.

The microscope has a clear image and high resolution.



Technical data:

- 1. The magnification of the microscope: 8x-130x
- 2. Working distance : 50-200mm
- 3. Connecting to a monitor via ports: (HDMI/VGA).
- 4. Microscope size (width x length): 40mm x 115mm

Contents of delivery:

- 1. **DL-UNI20016** Industrial electronic microscope with power supply (HDMI / VGA).
- 2. **DL-UNI20019** Tripod holder extended for microscope
- 3. **DL-UNI20018** Lamp diode for a microscope.





Set with industrial microscope, elongated tripod, light and monitor.

The microscope has a clear image and high resolution.



Technical data:

- 1. The magnification of the microscope: 8x-130x
- 2. Working distance : 50-200mm
- 3. Connect to monitor via ports: HDMI/VGA
- 4. Microscope size (width x length): 40mm x 115mm

Contents of delivery:

- 1. DL-UNI20016 Industrial electronic microscope with power supply (HDMI / VGA / AV).
- 2. DL-UNI20019 Tripod holder extended for microscope
- 3. **DL-UNI20018** Lamp diode for a microscope.
- 4. DL-UNI20021 Monitor.
- 5. **DL-UNI20022** Dedicated monitor holder on a tripod.





Set with industrial microscope, elongated tripod, light and monitor.

The microscope has a clear image and high resolution.



Technical data:

- 1. The magnification of the microscope: 8x-130x
- 2. Working distance : 50-200mm
- 3. Connect to monitor via ports: HDMI/VGA
- 4. Microscope size (width x length): 40mm x115mm

Contents of delivery:

- 1. DL-UNI20010 Industrial electronic microscope with power supply (HDMI / USB / AV).
- 2. DL-UNI20019 Tripod holder extended for microscope
- 3. **DL-UNI20018** Lamp diode for a microscope.
- 4. DL-UNI20021 Monitor.
- 5. **DL-UNI20022** Dedicated monitor holder on a tripod.

ATTENTION! All equipment from the delivery set is sold separately!





238

Комплект с микроскопом промышленным, удлиненным штативом, подсветкой и монитором.

Микроскоп имеет четкое изображение и высокое разрешение.





Технические данные:

3

- 1. Кратность увеличения микроскопа: 5х-100х
- 2. Рабочее расстояние : 50-170 мм
- 3. Подключение к монитору через порты: HDMI
- 4. Размер микроскопа (ширина х длина): 40мм х 115мм

Комплект поставки:

- 1. DL-UNI20013 Микроскоп электронный промышленный с блоком питания и
 - лампой подсветки (HDMI / USB).
- 2. DL-UNI20019 Штатив держатель удлиненный для микроскопа
- 3. DL-UNI20021 Монитор.
- 4. **DL-UNI20022** Специальный держатель монитора на штативе.

ВНИМАНИЕ! Все оснащение из комплекта поставки продается в том числе и отдельно!





Set with industrial microscope, elongated tripod, light and monitor.

The microscope has a clear image and high resolution.



Technical data:

- 1. The magnification of the microscope: 10x-180x
- 2. Working distance : 100-150mm
- 3. Connect to monitor via ports: HDMI
- 4. Microscope size (width x length): 40mm x115mm

Contents of delivery:

- 1. **DL-UNI20014** Industrial electronic microscope with power supply (HDMI / USB / AV).
- 2. DL-UNI20019 Tripod holder extended for microscope
- 3. **DL-UNI20018** Lamp diode for a microscope.
- 4. DL-UNI20021 Monitor.
- 5. **DL-UNI20022** Dedicated monitor holder on a tripod.





Microscope kit HDMI USB 1080P FHD 48MP x 200

The microscope has a clear image and high resolution Lens: 200X C-MOUNT magnification



Technical data:

1. Photo / video shooting

2. Additional functions: adding guide lines, image fixation,

mirroring, image rotation, digital zoom

- 3. Housing: aluminum alloy
- 4. Matrix: Panasonic
- 5. Matrix resolution 48 MP
- 6. Frame rate: at 1920*1080 / 60fps
- 7. Outputs: USB, HDMI, TF card, infrared sensor for remote control
- 8. Power supply: DC-12V/1A
- 9. Max TF card capacity: 64G
- 10.HDMI image resolution: 8168*6128 4:3 (50MP) 8168*4592 16:9 (37MP) (for TF card),
- 11. USB image resolution: 1920*1080 (for PC USB)
- 12. Video resolution: 1920*1080/60fps for HDMI, 1920*1080/
- 30fps 1280*720 / 30fps 640*480 / 30fps 320*240 /
- 30 fps for USB
- 13. Video format: MP4
- 14. Picture format: JPG
- 15. Remote control
- 16. Language support: Russian, Chinese, English, French, Spanish, Portuguese,
- German, Italian, Japanese
- 17. Lens: 200X C-MOUNT magnification
- 18. Working distance: 95mm (maximum working distance 16cm)
- 19. Zoom Ratio: 6.5:1

Contents of delivery:

- 1. DL-UNI20023 Microscope electronic promiscuous with block pitaniya (HDMI / USB / AV)
- 2. DL-UNI20019 Tripod holder extended for microscope
- 3. DL-UNI20018 Lamp diode for a microscope
- 4. DL-UNI20021 Monitor
- 5. DL-UNI20022 Dedicated monitor holder on a tripod



Комплект с микроскопом промышленным, удлиненным штативом, подсветкой и монитором.

Микроскоп имеет четкое изображение и высокое разрешение Объектив: увеличение 180X C-MOUNT



Технические данные:

1. Фото / видео съемка

2. Дополнительные функции: добавление вспомогательных линий, фиксация изображения,

зеркальное отображение, вращение изображения, цифровой зум

- 3. Корпус: алюминиевый сплав
- 4. Матрица: Panasonic
- 5. Разрешение матрицы 37.0 МР
- 6. Частота кадров: при 1920*1080 / 60 кадров в секунду
- 7. Выходы: USB, HDMI, tf-карта, инфракрасный датчик для пульта дистанционного управления
- 8. Питание: DC-12V / 1A
- 9. Максимальный объем tf-карты: 64G
- 10.Разрешение изображения HDMI: 8168*6128 4:3 (50MP) 8168*4592 16:9 (37MP) (для tf-карты),
- 11. Разрешение изображения USB: 1920*1080 (для ПК USB)
- 12. Разрешение видео: 1920*1080 / 60 кадров в секунду для HDMI, 1920*1080 /
- 30 кадров в секунду 1280*720 / 30 кадров в секунду 640*480 / 30 кадров в секунду 320*240 /
- 30 кадров в секунду для USB
- 13. Формат видео: МР4
- 14. Формат изображения: JPG
- 15. Дистанционное управление
- 16. Поддержка языков: русский, китайский, английский, французский, испанский, португальский, немецкий, итальянский, японский
- 17. Объектив: увеличение 180X C-MOUNT
- 18. Рабочее расстояние: 95 мм (максимальное рабочее расстояние 16 см)
- 19. Коэффициент масштабирования: 6,5: 1

Комплект поставки:

- 1. DL-UNI20011 Микроскоп электронный промышленный с блоком питания (HDMI / USB / AV).
- 2. DL-UNI20019 Штатив держатель удлиненный для микроскопа
- 3. DL-UNI20018 Лампа диодная для микроскопа.
- 4. DL-UNI20021 Монитор.
- 5. DL-UNI20022 Специальный держатель монитора на штативе.

ВНИМАНИЕ! Все оснащение из комплекта поставки продается в том числе и отдельно!





AUXILIARY EQUIPMENT and TOOLS for checking and repairing DTA



DL-UNI20017

Штатив держатель для микроскопа



DL-UNI20019

Штатив держатель удлиненный для микроскопа



DL-UNI20022

Держатель монитора монитора на штативе Посадочный диаметр 25мм.



DL-UNI20021

Монитор

Комплект поставки:

- 1.Монитор
- 2. Кабель HDMI
- 3. Кабель BNC
- 4. Кабель AV
- 5. Пульт управления 6. Блок питания
- 7. Кронштейн
- 8. Кабель VGA
- 9. Прокладка









Кабель BNC















equipment for diesel



AUXILIARY EQUIPMENT and TOOLS for checking and repairing DTA



DL-UNI20012 Endoscope Camera 3.9mm

Specifications:

- 1. Camera resolution: 1.0 Megapixel (FHD) 2. Field of view: 70°
- 3. Diameter: 3.9mm
- 4. Length of the thin part: 25mm
- 5. Total length: 140mm
- 6. Backlight: 6 high brightness LEDs
- 7. Waterproof case
- 8. Two types of connection ports: USB / Type-c
- 9. Ability to adjust the backlight 10. Ability to save photos
- 11. Ability to install software on the phone and PC



DL-UNI20100

Control stand for test benches injectors and injection pump

Benefits of this stand:

The stand can move across the floor for fixed wheels.

The rack can mount a PC with keyboard and monitor or laptop. There is a shelf at the bottom of the rack for a printer that closes with a door with polycarbonate glass.

Printer safety door retracts inside the rack, which creates additional convenience for accessing the printer.

There are two shelves in the middle of the rack for installation of control devices for various fuel systems.

Provides convenient access to everything equipment installed on this control stand.

Specifications:

- rack weight 80 kg
- overall dimensions mm (width x depth x height) 500x500x1600
- weight load kg. 160



AUXILIARY EQUIPMENT and TOOLS for checking and repairing DTA





Manual press for injector testing with mechanical pressure gauge

(without pressure sensor)

(without pressure sensor)

(with pressure sensor. 1500 bar)

(with pressure sensor. 1500 bar)

Contents of delivery:

- mechanical press 1 pc.
- mechanical pressure gauge 1 pc.

Manual press for injector testing with electronic pressure gauge

• electronic pressure gauge with cable - 1 pc.

Manual press for injector testing

• electronic pressure gauge with cable – 1 pc.

• pressure sensor (for RP 425) for 1500 bar - 1 pc.

• pressure sensor (for **RP 415**) for 1500 bar – 1 pc.

with 2-channel electronic pressure gauge

connecting tube – 2 pcs.

DL-RP410

DL-RP415

Contents of delivery: • mechanical press - 1 pc. • connecting tube - 2 pcs.

• battery charger - 1 pc.

DL-RP420

DL-RP425

Contents of delivery: • mechanical press - 1 pc. • connecting tube - 2 pcs.

• battery charger - 1 pc.







DL-RP430

Manufacturer - ZECA (Italy) Flame test chamber (aspirator) nozzle spray Allows for visual inspection performance of diesel i njectors without harm to health. The device is going to work liquid for reuse.



245



AUXILIARY EQUIPMENT and TOOLS for checking and repairing DTA



DL-RP500

Manufacturer - ZECA (Italy) Manual press for injector testing with mechanical pressure gauge

Contents of delivery:

- mechanical press 1 pc.
- mechanical pressure gauge 1 pc.
- connecting tube 2 pcs.



DL-RP510	(without pressure sensor)
----------	---------------------------

DL-RP515 (with pressure sensor. 1500 bar)

ZECA hand press for injector testing with electronic pressure gauge

Contents of delivery:

- mechanical press 1 pc.
- connecting tube 2 pcs.
- electronic pressure gauge with cable 1 pc.
- battery charger 1 pc.
- pressure sensor (for RP 515) for 1500 bar 1 pc.



DL-RP520	(without pressure sensor)			
DL-RP525	(with pressure sensor. 1500 bar)			

ZECA hand press for injector testing with 2-channel electronic pressure gauge

Contents of delivery:

- mechanical press 1 pc.
- connecting tube 2 pcs.
- electronic pressure gauge with cable 1 pc.
- battery charger 1 pc.
- pressure sensor (for RP 525) for 1500 bar 1 pc.



246

PUMP TEST.02

Common-Rail High Pressure Pump Testing Equipment



PUMP TEST .02

В состав комплекта входит: The kit includes:

1. The **PTC-2520** device is designed to provide user-programmable control signals to Common Rail injection pump pressure regulators to test their performance.

2. Device **FMDE-520**, designed to measure the performance of the Common-Rail injection pump in two channels.

- 3. Tool rack on wheels for easy operation.
- 4. A set of adapter cables.
- 5. Liquid fine filters (2 pcs.)
- 6. Software.









Anne i com i			-	1	
Access of access	-				
Annual Annua					
		 -			
Annual Annua	Average .			1.1	
	quantum.				
					1211



PTC-2520 CP TESTER

Device for testing and testing high-pressure fuel pumps of the Common Rail system with a set of cables.





FMDE-520

Device for testing the performance of fuel pumps of the Common Rail system of various manufacturers: Bosch, Delphi, Denso, Siemens, Cummins on a test bench.

It is a 2-channel liquid flow meter (pump supply and return discharge) in various modes, with digital information output to a backlit liquid crystal display.

 C. Star		E Pho	-	-
 descard.	•7	Here by the		
(a	•	Tax-market (in/mar		
house the Pr	inge -	home-10	11.01	
deres (crime)	-	None Scientifi	-	1
10.000m34/mmg	-	Tal Antice (Service)		
				1



EQUIPMENT and TOOLS for testing and repairing common rail pumps



Universal cradle for CR pumps

Delivery set DL-USN0021 (ST-03):

- 1. Rotary stand 1 pc.
- 2. Set of flanges for fastening CR pumps of 6 pcs.
- 3. Set of 4 pump support plates.

Delivery set DL-USN0021CR (ST-03CR):

- 1. Rotary stand 1 pc.
- 2. Set of flanges for fastening CR pumps of 6 pcs.

ATTENTION!

Holder plates for high pressure fuel pumps CR and rotary high pressure fuel pumps are also sold separately!







EQUIPMENT and TOOLS for testing and repairing common rail pumps

FLANGES





DL-UNI30474

Mounting flange for injection pump CP3 MAN, equivalent to Bosch 1685720258



DL-UNI30465

Mounting flange

Mounting flange for injection pump CR (MB)

for injection pump CR (BMW,

RENAULT, MB, Peugeot)



DL-UNI30884

Mounting flange for injection pump MAN CP3.4 analog Bosch 1685720312

DL-CR31607

Mounting flange for injection pump DENSO HP0 094000-0635

DL-CR30860

Mounting flange for injection pump CR DENSO HP2, HP3.

DL-CR30861

Mounting flange 50 mm for injection pump CR CP4. (AAE001-CP4)

DL-CR30862

Mounting flange 50 mm for injection pump CR CP4HS2 Bosch0445010637, Bosch0445010506.



Mounting flange 68 mm,

DL-CR30466

for injection pump CR Renault Megane, Delphi Siemens VDO, Land Rover, RangeRoverV8 and for HPFP VE



DL-UNI30428

Mounting flange 107 mm for injection pump CP3 Bosch.



DL-UNI50008

Bracket for pumps, Bosch standard 125 mm. Installed on a stand.



DL-UNI30886

Mounting flange for injection pump 107 mm CP2 Bosch 0445020036 (Renault).







EQUIPMENT and TOOLS for testing and repairing common rail pumps





DL-CR31145

Mounting flange 80mm for injection pump CR CP3S3 Bosch 0445020060





DL-CR50159 Mounting stand HPFP SIEMENS





DL-CR31150

Flange for mounting on stand injection pump CR DELPHI with bore diameter 50 mm and mounting holes perpendicular to the plane of the bore.



DL-UNI30887

Mounting flange HPFP CRCP3 Mercedes, (Similar to SIRINI AAE001-03)



DL-CR31165

High pressure fuel pump mounting flange BOSCH CR / CP1H3 60mm For example BOSCH injection pump 0445010223 (Renault Megane 2012)



DL-UNI31207

Universal flange with mounting hole diameter 50 mm, without mounting holes. Created for independent fastening holes for pumps which boarding diameter 50 mm.



DL-UNI31208

Universal flange with mounting hole diameter 60 mm, without mounting holes. Created for independent fastening holes for pumps which boarding diameter 60 mm



dieselland.ru | dieselland.biz | dieselland@mail.ru



EQUIPMENT and TOOLS for testing and repairing common rail pumps









DL-CR30866

Flange for stand mounting High pressure fuel pump CR DELPHI with landing 50 mm in diameter and three mounting holes: two of which are located perpendicular to the plane mounting hole, and one parallel to it.

DL-CR31228 (CP383)

Mounting flange for injection pump CR BOSCH 0445010091 MB Sprinter, Viti, Viano2,1 I. Since 2006 Mounting hole 50mm.





DL-CR31513

Flange for stand mounting High pressure fuel pump CR CP3S3/K140/40-789S Bosch 0445020125 Mounting hole 107 mm





DL-CR50267

Corner stand for fastenings for injection pump CR SIEMENS when tested on the stand.





DL-CR50266

Corner stand for CR DENSO injection pump mountings 097300-0023 during testing on the stand.





EQUIPMENT and TOOLS for testing and repairing common rail pumps

COUPLINGS



DL-UNI50132

DL-UNI50139

Compensation clutch

Bosch 1686401024)

with flange connection and reinforced package plates (analogue

Compensation clutch with clamping jaws and reinforced package plate



DL-M24L (CR31098)

Long sleeve Ø 24 mm for injection pump DENSO HP0



Coupling slotted for injection pump CR (for MV slot 8x18)

DL-MS9

Coupling slotted for CR injection pump (for Renault slot 9x20)

DL-MS10D

Coupling slotted for injection pump CR Denso, slot 10x23

DL-MS10 S

Муфта шлицевая для **ТНВД Siemens Peugeot** Boxer 2.2,шлиц 10x21,6

DL-MS11

Coupling slotted for injection pump CR MAN (11 splines)

DL-M17

Cone coupling Ø 17 mm for injection pump CR and injection pump VE

DL-M19

Cone coupling Ø 19 mm for CR and VE injection pumps



DL-CB2 30016

Conical coupling with flange connection Ø 30 mm Cam Box2, injection pump







DL-CB1 30139

Conical coupling Ø 30 mm Cam Box2, injection pump





DL-M22 (UNI31481)

Cone coupling Ø 22 mm for injection pump CR



DL-M23 (UNI30917)

Cone coupling Ø 23 mm for injection pump Continental A2C59517053, Bosch CR\ CP4HS2 0445010637, CP4S2 0445010611, CP4S1 0445010506



DL-M24 (UNI30127) Cone coupling Ø 24 mm for injection pump CRSR-3 mod.044502088







EQUIPMENT and TOOLS for testing and repairing common rail pumps





DL-MS4 (CR30955)

Coupling for injection pump Bosch 0445010512 Grooves for splines are made on the coupling pump connector and cone for centering.

DL-CR31416

Coupling for injection pump Bosch 0445010512 CR / CP4S1

Grooves for splines are made on the coupling pump connector and cone for centering. Fastening is carried out to expansion joint flange. Fits to stands BOSCH EPS-815, CR-Test 4E, CR-Test 2P and mounts adapted to them.

DL-UNI31025

Coupling for injection pump Bosch CP1 (included insert UNI31028 with groove

8 mm wide) and for high pressure fuel pump VDO (included insert UNI31027 with 9mm slot). Can be used on Bosch stands instead couplings 1685702090. Suitable for BOSCH stands EPS-815, CR-Test 4E, CR-Test 2P and customized attachments to them.

DL-UNI31029

Coupling DL-UNI31029 for injection pump Denso (included insert UNI31030 with groove 10 mm wide). Suitable for BOSCH stands EPS-815, CR-Test 4E, CR-Test 2P and fittings adapted to them.



DL-CR31271

Coupling cone 17mm for testing CR pumps and VE injection pumps Fastening is carried out to the flange compensation clutch. Suitable for stands BOSCH EPS-815, CR-Test 4E, CR-Test 2P and fittings adapted to them.



254





EQUIPMENT and TOOLS for testing and repairing common rail pumps





















DL-CR31269

Coupling cone 19mm for testing CR pumps and VE injection pumps Fastening is carried out to the flange compensation clutch. Suitable for stands BOSCH EPS-815, CR-Test 4E, CR-Test 2P and fittings adapted to them.

DL-CR31558 (K23)

Cone coupling 23 mm for high pressure fuel pump CR Bosch and Continental Fastening is carried out to the flange compensation clutch. Suitable for CR-Test stands, BOSCH EPS-815 and mounts adapted to them Installed injection pump CR:

- Continental A2C59517053
- BOSCH CR/CP4HS2 0445010637
- BOSCH CR/CP4S2 0445010611
- BOSCH CR/CP4S1 0445010506

DL-CR31251

Cone coupling 24mm for high pressure fuel pump CR CP-3

Fastening is carried out to the flange compensation clutch. Suitable for stands BOSCH EPS-815, CR-Test 4E, CR-Test 2P and fittings adapted to them.

DL-CR31248

Coupling spline (11 splines) for injection pump CR MANN

Fastening is carried out to the flange compensation clutch. Suitable for stands BOSCH EPS-815, CR-Test 4E, CR-Test 2P and adapted to them fasteners.

DL-CR31480

Cone coupling 22 mm for checking pumps CR Siemens (VDO).

Fastening is carried out to the flange compensation clutch. Suitable for stands BOSCH EPS-815, CR-Test 4E, CR-Test 2P and adapted to them fasteners.

DL-CR31594

Coupling K35 for connection on the stand Fuel pump CP2 MAZ

Fastening is carried out to the flange compensation clutch. Suitable for stands BOSCH EPS-815, CR-Test 4E, CR-Test 2P and adapted to them fasteners.





EQUIPMENT and TOOLS for testing and repairing common rail pumps





Set of equipment for the repair of injection pump CR CP4 Bosch.

Contents of delivery:

- DL-CR30861 Flange - 1 pc.
- DL-CR30862 Flange - 1 pc.
- DL-UNI50083 Adapter 1 pc.
- DL-UNI50084 Adapter 2 pcs. •
 - DL-UNI30980 Nut M16x1 3 pcs.
- DL-CR31003 Socket for pump valve CP4 - 1 pc.





DL-CR50151

Stand support kit pumps Denso HP0.

Contents of delivery:

- DL-CR31094 Support - 2 pcs.
- DL-UNI30090 Profile bolt 2 pcs.
- Nut M14 2 pcs.
- Washer 14mm 2 pcs.
- Grover14mm 2 pcs.



of plunger pairs, BOSCH CP2 pumps of the system

DL-CR50156

Set of clamps for assembly of injection pump CP3 (Similar to SIRINI AZ0128-427)

Contents of delivery:

• Clamp DL-CR50152 - 3 pcs.

DL-CR50307

Clamp for dismantling the dosing injection pump valve CR CP3 Contents of delivery:

- clamp body 1 pc DL-CR31580 .
- DL-CR31582 clamp slide — 1 pc.
- DL-CR31581 clamp axle 1 pc.
- Pins 2 pcs.
- Recessed fixing bolt 1 pc.









•

Device for hanging the pusher **Common Rail**

EQUIPMENT and TOOLS for testing and repairing common rail pumps











DL-CR31003

Socket for mounting / dismounting valve injection pump CR CP4 Bosch for torque wrench 1/2".

DL-CR10003

Fitting kit with lock for pump check CP1

Contents of delivery:

- **DL-CR10004** Fitting Ø8mm 2 pcs.
- DL-CR10005 Mounting plate 1 pc.

DL-CR50198

Adapter for measuring pressure in HPFP CR CP-3. It is installed instead of the dispenser.

Contents of delivery:

• Adapter Body - 1/8" Barb - Herringbone for hose with internal Ø10mm

ATTENTION! Quick connector not included in the scope of delivery and must be ordered separately.

DL-CR31497

Pressure adapter booster pump CR

ATTENTION! The adapter comes without tube fittings and pressure gauge!

DL-CR31497KIT

Pressure adapter kit booster pump CR

Contents of delivery:

- DL-SP09570 L-shaped "quick"
- adapter M5x4mm
- **DL-SP09580** Fitting "mother" 1/4"x4mm for manometer
- DL-P1002 Flexible PVC tube dia.4mm (100cm)
- **D-12-TV63-016** Pressure gauge 16 bar with lower fitting 1/4"

4

ACCESSORIES FOR DL-CR31497 ADAPTER

Pressure gauge 0+10bar, Ø63 with bottom fitting 1/4"

Pressure gauge 0÷16 bar, Ø63 with bottom fitting 1/4"

D-12-TV63-010

D-12-TV63-016





34-RL3104M5 Angle adapter M5 x Ø4mm with collet

34-RL3106M5

Angle adapter M5 x Ø6mm with collet



34-RA30-4,5-M5 Fitting straight M5 x Ø4mm herringbone



DL-MSDE Fitting kit "banjo" M5 x Ø4mm



DL-R1001 fuel hose Ø int. 4mm



34-RL020402 adapter with internal thread G1/4" x Ø4mm with collet

34-RL020602 adapter with internal G1/4"xØ6mm thread with collet



34-MC130614 adapter with internal thread G1/4"x Ø 6mm with union nut



DL-P1002

PVC tube Ø outer 4mm

DL-P1004

Teflon tube Ø outer 6mm



34-RL0104M5 Adapter straight M5 x Ø 4mm with collet

34-RL0106M5

Adapter straight M5 x Ø 6mm with collet



34-MC2306M5C

Fitting kit "banjo" M5 with a union tube nut Ø 6mm x Ø4mm



DL-CR50246

Manometer mounting bracket. Made in the form of a hook and gauge holder brackets. Used with pressure gauges of the series D-12-TV63



dieselland.ru | dieselland.biz | dieselland@mail.ru

258

EQUIPMENT and TOOLS for testing and repairing common rail pumps





DL-UNI50264

Fitting 3/8 "x8 mm

Designed for the following equipment:

- 1. Stands CR-Test, SPF, SPN, DORPAT
- 2. FMDE device (2-channel liquid flow meter)
- 3. "PUMP-TEST.02" Test equipment
- CR high pressure pumps

The fitting has a 3/8" thread and is designed for hose diameter 8 \mbox{mm}





DL-UNI50265

Fitting 3/8 "x10 mm

Designed for the following equipment:

- 1. Stands CR-Test, SPF, SPN, DORPAT
- 2. FMDE device (2-channel liquid flow meter)
- 3. "PUMP-TEST.02" Test equipment CR high pressure pumps

The fitting has a 3/8" thread and is designed for hose diameter 10 mm





DL-UNI50126 5 µm liquid filter with 3/8" outlets

DL-UNI50047

5 μm liquid filter with fittings (herringbone) by 10 mm



The test stand is designed to test pump injectors, pump sections.

DORPAT Multi-Cam11 – The stand can be used for fuel equipment of any diesel engines of light and medium traction, including high-speed engines of cars, buses, trucks and agricultural tractors with UIS (unit injector system) and UPS (unit pump system) fuel equipment installed on them.

Stands are produced with a capacity of 11 kW.

The measurement takes place in an electronic system.



STAND EQUIPMENT

2CB20001	CamBox CB		
DL-CB230016	Drive Coupling CamBox2		
DL-CB230010	Spray nozzle bracket	1 pc	
	Bolt M10,L=106mm, bolt M10,L=56mm for brackets. atomizer nozzles	1 set	
DL-CB230012	Spray nozzle Ø 9mm		
DL-CB230022	Injector clip		
DL-CB230046, DL-CB230047, DL-CB230048, DL-CB230049 Sealing washers atomizer			
DL-CB230013	Cam stroke position lock	2 pcs	
DL-CB230084	Remote bushing H=7 \emptyset 20 for mounting the clip under the passenger NF		
DL-CB230109	Pusher screw for pump injector spherical		
DL-CB230134	Screw pusher for pump-injector spherical short		
DL-CB230135	Screw-pusher for pump-injector internal		
DL-CB230043	Pusher screw with nut for pumping sections M12x1.25		
DL-CB20151	Clamp-adapter No. 0151 for Audi / VW1.9 unit injectors		
DL-CB20152	Clamp-adapter No. 0152 for Audi / VW2.0 unit injectors		
DL-CB20124	Clamp-adapter No. 0124 for pump-injectors Volvo FH12, Iveco, Bosch		
DL-CB20148	Clamp-adapter No. 0148 for unit injectors Volvo FH12, Delphi E3		
DL-CB20140	Clamp-adapter No. 0140 for Scania unit injectors		
DL-CB20129	Clamp-adapter No. 0129 for MBActros unit injectors		
DL-CB201333	Clamp-adapter No. 0133 for MBAtego unit injectors		
DL-CB20144	Clamp-adapter No. 0144 for pump injectors DAF, MAK, Renault		
DL-CB20123	Clamp-adapter No. 0123 for PLD sections of unit injectors No. 0129,133,144		
DL-CB20100	Clamp-adapter No. 0100 for installing the indicator head	1 pc	
DL-UNI30035	Fitting for clamp-adapter M14x1.5x1/4"		
1/4MBSPF04	Quick coupler male hydraulic 1/4"		
D-GM1538AN	Rubber-metal gasket ØM14		
D-GM1504AN	Gasket rubber-metal Ø1/4"		
DL-UIS0920B	Adapter cable for Bosch injector universal		
DL-UIS0921D1	Adapter cable for Delphi E3 injector 4-pin		



STAND EQUIPMENT

DL-UIS0922D2	Adapter cable for injectors Delphi E3 4-pin second type	1 шт.
DL-UIS0923D	Adapter cable for Delphi injector 2-pin	1 шт.
DL-UIS0924V	Adapter cable for VW injector	1 шт.
DL-CB250001	Adjustable gauge for setting the preload of the unit injector	1 шт.
	Supply hose 3/8"x1/4"x750mm	1 к-т.
	34-K2-212D - Ø1/4" female quick coupler (1pc)	
	Backflow outlet hose 3/8"x1/4"x700mm	1 к-т.
	34-K2-212D - Ø1/4" female quick coupler (1pc)	
	Bolt Banjo 1/4" (2pcs) + Bolt Banjo M14x1.5 (2pcs)	1 к-т.
	The quick adapter from the spray nozzle to the tube will measure. 1/8" x 1/8"	1 шт.
	vUNI30081	
DL-UNI50138	Measuring tube Teflon flexible in steel braid for flow measurement	1 шт.
P1004	Teflon tube Ø 6mm x 1500mm	1 шт.
34-RL020602	Fitting (quick adapter) Ø 6mm x 1/4"	1 шт.
D1530075	Handwheel for scrolling the flywheel	1 шт.
	Cushioning legs (4 pcs.) + Door key (4 pcs.)	1 к-т.
	Program with test plans from the manufacturer (1 pc.)	1 шт.
	Compensation spring (red L=76mm) for plunger travel 10-12mm	1 шт.
DL-CB230169	Pusher for compensating spring (red L=76mm)	1 шт.
DL-UNI31222	Open-end wrench 22mm	1 шт.



STAND EQUIPMENT



DL-UIS0920B Cable for BOSCH injectors (universal)



DL-UIS0921D1 Cable for injectors Delphi E3 4-pin



DL-UIS0923D Cable for Delphi injectors 2-pin



DL-UIS0924V Cable for VW injectors



DL-UIS0922D2

Cable for injectors Delphi E3 4-pin second type















STAND EQUIPMENT

DL-CB20124

Clamp for injectors Volvo FH12, lveco, Bosch 0414701004, 0414701006, 0414701013, 0414701014, 0414701015, 0414701021, 0414701022, 0414702002, 0414702003, 0414702005, 0414702006, 0414702007, 0414702009, 0414702010, 0414702012, 0414702013, 0414702014, 0414702015

to Cam Box 2 of the DORPAT stand Delivery set: clamp - 1 pc, fitting - 2 pcs,

rubber-metal. gasket - 4 pcs.

DL-CB20148

Clamp for injectors Volvo FH12, Delphi E3 to Cam Box 2 of the DORPAT stand

Delivery set: clamp - 1 pc, fitting - 2 pcs, rubber-metal. gasket - 4 pcs.

DL-CB2 0151

Clamp for injectors Audi / VW 1.9

0414720002, 0414720003, 0414720005, 0414720007, 0414720008, 0414720009, 0414720013, 0414720014, 0414720015, 0414720016, 0414720018, 0414720028, 0414720029, 0414720030, 0414720033, 0414720034, 0414720035, 0414720036, 0414720037, 0414720038, 0414720039, 0414720201, 0414720204, 0414720206, 0414720208, 0414720209, 0414720210, 0414720213, 0414720214, 0414720215, 0414720216, 0414720217, 0414720220, 0414720221, 0414720222, 0414720223, 0414720224, 0414720225, 0414720226, 0414720227, 041472028, 041472029, 0414720230, 0414720231, 0414720232, 0414720301, 0414720302, 0414720303, 0414720304, 0414720305, 0414720311, 0414720312, 0414720313, 0414720314 **to Cam Box 2 of the DORPAT stand**

Delivery set: clamp - 1 pc, fitting - 2 pcs, rubber-metal. gasket - 4 pcs, tack - 1 pc, fixing screw - 1 pc.

DL-CB20152

Clamp for injectors Audi / VW 2.0 0414720401, 0414720402, 0414720403, 0414720404

to Cam Box 2 of the DORPAT stand

Delivery set: clamp - 1 pc, fitting - 2 pcs, sealing washer - 4 pcs, fixing screw - 2 pcs.



STAND EQUIPMENT

DL-CB20140

Clamp for Scania injectors

0414701017, 0414701018, 0414701019, 0414701020, 0414701030, 0414701032, 0414701035, 0414701036, 0414701037, 414701038, 0414701040, 0414701042, 0414701043, 0414701044, 0414701045, 0414701069, 0414700002, 0414701005, 0414701007, 0414701008, 0414701016

to Cam Box 2 of the DORPAT stand

Delivery set: clamp - 1 pc, fitting - 2 pcs, rubber-metal. gasket - 4 pcs.



DL-CB20129

Clamp for PLD Mercedes Actros 0414799005, 0414799007, 0414799009, 0414799010, 0414799011, 0414799015, 0414799016, 0414799018, 0414799021, 0414799023, 0986445002

to Cam Box 2 of the DORPAT stand Delivery set: clamp - 1 pc, fitting - 2 pcs, rubber-metal. gasket - 4 pcs.



DL-CB20133

Clamp for PLD Mercedes Atego 0414799003, 0414799006, 0414799008, 0414799012, 0414799013, 0414799014, 0414799017, 0414799019, 0414799022, 0986445003

to Cam Box 2 of the DORPAT stand Delivery set: clamp - 1 pc, fitting - 2 pcs, rubber-metal. gasket - 4 pcs.



DL-CB20144

Clamp for PLD DAF, MAK, Renault 0414755005, 0414755006, 0414755007, 0414755008, 0414755014, 0414755015, 0414755016, 0414755017, 0414755018

to Cam Box 2 of the DORPAT stand Delivery set: clamp - 1 pc, fitting - 2 pcs, rubber-metal. gasket - 4 pcs.



STAND EQUIPMENT



DL-CB20100

Clamp-adapter for indicator head to Cam Box 2 of the DORPAT stand

Delivery set: clamp - 1 pc.



DL-CB20123D

Clamp-adapter for PLD sections pump injectors 0129, 0133, 0144, 0145 to Cam Box 2standDORPAT

Delivery set: clamp – 1 pc.



DL-UNI31222

Open-end wrench at 22mm



OPTIONAL EQUIPMENT











Inspection and test kit unit injector Caterpillar C12 to CamBox 2 of the DORPAT stand. Contents of delivery:

- clip-adapter **DL-CB20125** 1 pc.
- injector pusher CB230276 (for C13)
- sealing washer **SV230289**
- nozzle for sprayer **SV230282**
- fitting to the adapter 2 pcs.
- rubber-metal gasket 4 pcs.

Nozzle not included.

DL-CB20126KIT

Inspection and test kit injectors Caterpillar C15, C13 (CAT2490713) Perkins to CamBox 2 of the DORPAT stand. Contents of delivery:

- clip-adapter **DL-CB20126** 1 pc.
- injector pusher CB230294 (for C15)
- injector pusher CB230276 (for C13)
- sealing washer SV230289
- nozzle for sprayer SV230282
- fixing bracket SV230283
- fitting to the adapter 2 pcs.
- rubber-metal gasket 4 pcs.

Nozzle not included.

DL-CB20127

Clamp for PLD Detroit (Bosch) 0414750003, 0414750004 to Cam Box 2

Delivery set: clamp - 1 pc, fitting - 1 pc, rubber-metal. gasket - 2 pcs.

DL-CB20128

Clamp for injectors lveco 7,8 Liters

0414700002, 0414700003, 0414700004, 0414700005, 0414700006 **to Cam Box 2 Delivery set:** clamp - 1 pc, fitting - 2 pcs, rubber-metal. gasket - 4 pcs.



OPTIONAL EQUIPMENT





DL-CB20131

DL-CB20130

to Cam Box 2

Clamp for injectors 0414703005, 0414703007

rubber-metal. gasket - 4 pcs.

Clamp for UD Nissan injectors 0414701023, 0414701024, 0414701033, 0414701034 to Cam Box 2

Delivery set: clamp - 1 pc, fitting - 2 pcs, rubber-metal. gasket - 4 pcs.

Delivery set: clamp - 1 pc, fitting - 2 pcs,

DL-CB20136

Clamp for Land Rover-Discovery injectors (Delphi) to Cam Box 2

Delivery set: clamp - 1 pc, fitting - 2 pcs, rubber-metal. gasket - 4 pcs.



Clamp for Caterpillar L10 injectors to Cam Box 2


Kit includes:

- Clamp adapter DL-CB20137
- Sealing washer **SV230289**
- Nozzle for sprayer SV230282
- Fitting to the adapter 2 pcs.
- Rubber-metal gasket 4 pcs.

Nozzle not included.



OPTIONAL EQUIPMENT



- clip-adapter **DL-CB20138** 1 pc.
- nozzle pusher SV230276 1 pc.
- fixing bracket SV230440 1 pc.
- fitting to the adapter 2 pcs.
- rubber-metal gasket 4 pcs.

Nozzle not included.







DL-CB20139KIT

Inspection and test kit pump injector Cummins 4DEC01L4061851 to CamBox 2 of the DORPAT stand. Contents of delivery:

- clip-adapter **DL-CB20139** – 1 pc.
- fixing bracket **SV230440** 1 pc.
- fitting to the adapter 2 pcs.
- rubber-metal gasket 4 pcs.

Nozzle not included.

DL-CB20145

Clamp for PLD DELPHI to Cam Box 2 of the DORPAT stand

Delivery set: clamp - 1 pc, fitting - 2 pcs, rubber-metal. gasket - 4 pcs.

DL-CB20146

Clamp for injectors Caterpillar L15 to Cam Box 2 of the DORPAT stand

Delivery set: clamp - 1 pc, fitting - 2 pcs, rubber-metal. gasket - 4 pcs.



OPTIONAL EQUIPMENT









DL-CB20146KIT

Clamp for Caterpillar L15 injectors to Cam Box 2 Kit includes:

- DL-CB20146 Clamp adapter
- Sealing washer SV230289
- Nozzle for sprayer SV230282
- Injector pusher CB230294
- SV230283
- Fixing bracket
- Fitting to the adapter 2 pcs.
- Rubber-metal gasket 4 pcs.

Nozzle not included.

DL-CB20149

Clamp for Bosch injectors 0414703004, 0414703008, 0414703009, 0414703013 to Cam Box 2 of the DORPAT stand Delivery set: clamp - 1 pc, fitting - 2 pcs, rubber-metal. gasket - 4 pcs.

DL-CB20153KIT

Inspection and test kit pump injector Bosch 0414703003 to CamBox 2 of the DORPAT stand. Contents of delivery:

- clip-adapter DL-CB20153 1 pc;
- nozzle pusher SV230276 - 1 pc;
- fitting to the adapter 2 pieces;
- rubber-metal gasket 4 pcs.

Nozzle not included.

DL-CB20154KIT

Kit for checking and testing unit injectors CumminsHPI to DORPAT CamBox 2. Contents of delivery:

- clip-adapter **DL-CB20154** 1 pc.
- nozzle pusher CB230356 - 1 pc.
- nozzle for sprayer CB230357 1 pc.
- valve holder CB230355 1 pc.
- bracket **CB220007** for valve holder – 1 pc.
- Timing valve 1 pc.
- Metering valve 1 pc.
- steel braided hose 2 pcs.
- fitting for a hose 4 pcs.
- fitting to the adapter 2 pieces;
- rubber-metal gasket 4 pcs.
- pressure nozzle 1 pc.



OPTIONAL EQUIPMENT



DL-CB20155

Clamp for injectors Delphi E1 (John Deere) to Cam Box 2 of the DORPAT stand

Delivery set: clamp - 1 pc, fitting - 2 pcs, rubber-metal. gasket - 4 pcs.

Nozzle not included.



DL-CB20156

Clamp adapter for testing unit injectors CAT 3920206

Delivery set: clip - 1 pc, fixing bracket - 1 pc fixing bolt of the clamp-lock 8x35 - 2 pcs fitting - 2 pcs, rubber-metal. gasket - 4 pcs

Nozzle not included.



DL-CB20157

Test adapter clamp pump injector Cummins 3053124

Delivery set: clamp - 1 pc, fitting - 2 pcs, rubber-metal. gasket - 4 pcs.

Nozzle not included.



OPTIONAL EQUIPMENT



DL-CB2 50037

Injection sensor for unit injectors Cummins HPI



DL-CB250036KIT

injection sensor (piezo)





25-FPKM-04

Fitting - quick adapter for adapter

25-FPKF-04

Hydraulic Quick Connector female connections 1/4"



OPTIONAL EQUIPMENT



1680750120

Tube for test nozzle to the DORPAT Multi-Cam stand



1688901119

Test nozzle for checking fuel equipment to the stand DORPAT Multi-Cam

1688901118

Test nozzle for checking fuel equipment to the stand DORPAT Multi-Cam



ISO-100-V5

Jet 0.5mm



DL-UNI30229

Tip (with gaskets and fitting) for test injector to DORPAT stand Multicam

Contents of delivery: tip - 1 pc, rubber-metal gasket - 2 pcs, connecting fitting 1 pc



CAM-BOX1 FORCE

Basic kit for testing unit injectors and single pumps (UI / UP SYSTEM).

Kit includes:

- 1. CAMBOX 1
- 2. Controller UIS TESTER V6



CAMBOX 1

Mechanical part to check injector pump.

The basic version comes with clip for Volvo FH12 unit injectors and some lveco injectors Bosch. Clips for other nozzles by additional order.



UIS TESTER V6

Controller - electronic part to check pump injectors.

Device for testing and performance checks unit injectors (UIS) and individual fuel pumps (pump sections) high pressure with solenoid valves high pressure (UPS).



EQUIPMENT





Crankcase - protective cover

Included in CAM-BOX1: • crankcase 3pcs.

crankcase 3pcs.



Included in CAM-BOX1:

- nozzle 3 pieces,
- fitting 3 pcs.



Threaded pusher

Included in CAM-BOX1:

- spherical pusher 1 piece,
- concave pusher 1 pc.





Pen holder

Included in CAM-BOX1:

• handle - 1 pc.

Mounting guides Cam box on stand

Included in CAM-BOX1: • guide sleeve - 2 pcs.



EQUIPMENT











Clamp for injectors Volvo FH12 and some Bosch lveco injectors CB0124-01

Included in CAM-BOX1: • clamp - 1 pc.

Hose kit to adapter - clamp

Included in CAM-BOX1:

- pressure valve 1 piece,
- banjo bolt 1 piece,
- banjo fitting 2 pcs.,
- washers 4 pcs.

Clamp for injectors

Included in CAM-BOX1: • clamp - 1 pc.

elenite i per

Atomizer Kit

Included in CAM-BOX1:

- atomizer holder 1 pc,
- adapter for atomizer 7mm 1pc,
- fitting 1 pc.

Strait Kit

Included in CAM-BOX1:

- defoamer 1 piece,
- fitting 1 piece,
- PVC tube 6mm x 1.5m 1 pc.





KV

Camshaft for LandRov. Iveko Cur. VW Contents of delivery: • Cam shaft - 1 pc.



VW

Adapter for Audi / VW Contents of delivery:

- adapter 2 pcs (2 options),
- spray tip,
- fitting 1 piece,
- side fitting 1 pc,
- clamp 1 piece,
- fastening bolt 1 pc.



MU

Mounting sleeve to the pump flange for **TNVDP, PE and for CAM BOX** Contents of delivery:

- coupling 1 piece,
- lock washer 1 piece,
- fixing nut- 1 PC.



CB 0136-01 LR

Clamp for injectors Land Rover Discovery Contents of delivery:

- clip 1pc,
- fitting 1 piece,
- clamp 1 piece,
- tip on the spray nozzle

ø=7mm - 1pc.



CB0140-01 SC

Clamp for injectors Scania Contents of delivery: clip - 1pc,

• pusher - 1 pc.



CB0148-01500 HP

Clamp for injectors Volvo 500HP Delphi Contents of delivery: • clamp - 1 pc.





CB0147-01 JD

Clamp for injectors John Deere Delphi Contents of delivery: • clamp - 1 pc.



OPTIONAL EQUIPMENT

CB 0128-01 IVECO

Clamp for lveco 7,8L Contents of delivery: • clamp - 1 piece.

• side fitting - 1 pc.



CB 0129-01 ACT

Clamp for injectors Mercedes Actros Contents of delivery:

- clamp 1 piece.
- adapter AZ0309-01 1 pc,
- side fitting DL-EA 1pc



CB0133-01 AT

Clamp for injectors Mercedes Atego Contents of delivery: clip - 1pc,

- adapter AZ0309-01 1 pc,
- side fitting DL-EA 1pc



CB0144-01 DAF

Clamp for injectors Clamp for injectors DAF, MAK, Renault Contents of delivery:

- clip 1pc,
- adapter AZ0309-02 1 pc,
- side fitting 1 pc,
- cola receiver 1 piece,
- fitting 2 pcs.





CB0146-01 CAT15

Clamp for injectors Caterpillar L15 Contents of delivery: • clamp-1pc, • clamp-1pc,

- spray tip
- nozzles Ø- "cone" 1 pc,
- crankcase 1 pc, fitting 1 pc.

OPTIONAL EQUIPMENT



CB0137-01 CAT10

Clamp for injectors Caterpillar L10 Contents of delivery: • clip - 1pc, • spray tip nozzles Ø=10.5mm – 1pc, • fitting - 1 piece



CB0138-01 DET

Clamp for injectors Detroit Contents of delivery:

- clip 1pc,
- spray tip
- nozzles Ø=8.5mm 1pc,
- clamp 1 piece,
- fitting 1 piece



CB0139-01 CUM

Clamp for injectors Cummins Contents of delivery: • clip - 1pc,

- spray tip
- nozzles Ø=8.5mm 1pc,
- clamp 1 piece,
- fitting 1 piece



00

in the second second

DL-CB230017

Flange for sensor revolutions to CAM BOX1 and to CAM BOX2

PCIDS2ZNKW-M8-45-M8

Rev. sensor

for CAM BOX 1

Contents of delivery:

• fastening nut - 2 pcs.

sensor - 1 piece,
connecting cable - 1pc,



H5-1024-IE-D

Angle encoder for 1024 pulses for CAM BOX1 and CAM BOX2

H5-5000-IE-D

Angle encoder for 5000 impulse for CAM BOX1 and CAM BOX2

DL-UNI50038

Angle encoder in a metal case for 5000 impulses for CAM BOX1 and CAM BOX2



0232103064

RPM sensor for CAMBOX 1 and CAMBOX 2



DL-CBTS

Pusher spherical to rocker on CAM BOX1

DL-CBT

Pusher concave to rocker on CAM BOX1



278

Angle

CAM-BOX 2 MASTER

Kit for testing unit injectors and single pumps (UI / UP SYSTEM).

Kit includes:

- 1. CAM-BOX 2 MECHANIC
- 2. Controller UIS TESTER Multi-CAM



CAM-BOX 2 MECHANIC

Mechanical part to check pump nozzles and pump sections.

Device for testing and performance checks unit injectors (UIS) and individual fuel pumps (pump sections) high pressure with electromagnetic high pressure valves (UPS). The CAM-BOX2 MECHANIK has integrated inductive speed sensor and sensor angle (encoder) allowing to read indication of revolutions and angles for testing of modern EUI systems and EUP



UIS TESTER Multi-CAM

Electronic part for checking pump injectors

Test and Verification Instrument unit injector performance (UIS) and individual fuel pumps (pump sections) high pressure with high pressure solenoid valves pressure (UPS).



DL-CB2 0124


CAM-BOX 2 MECHANIC

EQUIPMENT

Clamp for injectors Volvo FH12, Iveco, Bosch

0414702012, 0414702013, 0414702014, 0414702015

0414700002, 0414701004, 0414701006, 0414701013, 0414701014, 0414701015, 0414701021, 0414701022, 0414702002, 0414702003, 0414702005, 0414702006, 0414702007, 0414702009, 0414702010,





DL-CB230035

Fitting Ø M14 (1.5) x1/4 "- 2 pcs. with rubber-metal gasket - 4 pcs.



test holder nozzles to the clamp adapter



DL-CB2 0123 Clamp-adapter for sections PLD NF 0129.0133.0144



DL-CB230022 Bracket-clamp

DL-CB230010

Bracket-nozzles and spray nozzle Ø 7mm

DL-CB230012 Spray nozzle Ø 9mm



M10 bolt, L= 106mm, M10 bolt, L= 56mm for nozzle bracket



0000

Clip-adapter for indicator head

DL-CB2 0100

DL-CB230046, CB230047, CB230048, CB230049

Sealing washer (4pcs)

(3 pcs)



DL-CB230084

Remote bushing H=7 Ø 20 for installation of passenger NF (2 pcs.)



DL-CB230189

Remote bushing H=5 Ø 12 for installation of passenger NF (2 pcs.)



DL-CB230013 Retaining pin



dieselland.ru | dieselland.biz | dieselland@mail.ru

	J				
CAM-BOX 2 MECHANIC EQUIPMENT					
DL-CB230109,CB230134, DL-CB230135,DL-CB230043 Screw pusher (4pcs)	DL-CB250001 Caliber adjustable for preload settings injector pump	Banjo fitting, Banjo bolt, rubber-metal gaskets and hose clamps (2 sets)			
\mathbf{O}	pressure hose to pump nozzle Ø 10x1000mm				
	return hose from pump nozzle Ø 10x1000mm	DL-1004 Teflon tube Ø 6mm x 1500mm			
	Û				
DL-UNI30001	DL-PG	D-5358			
Union with fitting Ø 6mm x 1/8" for teflon tube	Defoamer with fitting Ø 6mm x1/4"	Compensating spring for light injectors (red)			

Back pressure valve drain 2.5 bar



profile bolt

DL-UNI30001

M14 x 44mm with nut and

washers for fastening

Cam-Box (2 sets)

pusher for compensatory springs

DL-CB230169

OPTIONAL EQUIPMENT





DL-UNI50132

Compensation clutch with clamping jaws and reinforced package plates

DL-UNI50139

Compensation clutch with flange connection and reinforced package plates (analogue Bosch 1686401024)

DL-CB2 30016

Conical coupling with flange connection Ø 30 mm Cam Box2, injection pump



DL-CB1 30139

Cone coupling Ø 30 mm Cam Box2, injection pump



DL-CB230879

Mounting key for CAM-BOX couplings DL-CB130139 and DL-CB230016











OPTIONAL EQUIPMENT

DL-CB20124

Clamp for injectors Volvo FH12, Iveco, Bosch 0414701004, 0414701006, 0414701013, 0414701014, 0414701015, 0414701021, 0414701022, 0414702002, 0414702003, 0414702005, 0414702006, 0414702007, 0414702009, 0414702010, 0414702012, 0414702013. 0414702014. 0414702015

to Cam Box 2 of the DORPAT stand

Delivery set: clamp - 1 pc, fitting - 2 pcs, rubber-metal. gasket - 4 pcs.

DL-CB20125KIT

Inspection and test kit unit injector Caterpillar C12 to CamBox 2 of the DORPAT stand. Contents of delivery:

- clip-adapter **DL-CB20125** 1 pc.
- injector pusher CB230276 (for C13)
- sealing washer SV230289
- nozzle for sprayer SV230282
- fitting to the adapter 2 pcs.
- rubber-metal gasket 4 pcs.

Nozzle not included.

DL-CB20126KIT

Inspection and test kit injectors Caterpillar C15, C13 (CAT2490713) Perkins to CamBox 2 of the DORPAT stand. Contents of delivery:

- clip-adapter DL-CB20126 - 1 pc.
- injector pusher CB230294 (for C15) (for C13)
- CB230276 injector pusher
- sealing washer SV230289
- nozzle for sprayer SV230282
- fixing bracket SV230283
- fitting to the adapter 2 pcs.
- rubber-metal gasket 4 pcs.
- Nozzle not included.

DL-CB20127

Clamp for PLD Detroit (Bosch) 0414750003, 0414750004 to Cam Box 2

Delivery set: clamp - 1 pc, fitting - 1 pc, rubber-metal. gasket - 2 pcs.



2000









OPTIONAL EQUIPMENT

DL-CB20128

Clamp for injectors lveco 7,8 Liters

0414700002, 0414700003, 0414700004, 0414700005, 0414700006 **to Cam Box 2 Delivery set:** clamp - 1 pc, fitting - 2 pcs, rubber-metal. gasket - 4 pcs.

DL-CB20129

Clamp for PLD Mercedes Actros 0414799005, 0414799007, 0414799009, 0414799010, 0414799011, 0414799015, 0414799016, 0414799018, 0414799021, 0414799023, 0986445002

to Cam Box 2 of the DORPAT stand Delivery set: clamp - 1 pc, fitting - 2 pcs, rubber-metal. gasket - 4 pcs.

DL-CB20130

Clamp for injectors 0414703005, 0414703007 to Cam Box 2

Delivery set: clamp - 1 pc, fitting - 2 pcs, rubber-metal. gasket - 4 pcs.

DL-CB20131

Clamp for UD Nissan injectors 0414701023, 0414701024, 0414701033, 0414701034 to Cam Box 2

Delivery set: clamp - 1 pc, fitting - 2 pcs, rubber-metal. gasket - 4 pcs.

DL-CB20133

Clamp for PLD Mercedes Atego 0414799003, 0414799006, 0414799008, 0414799012, 0414799013, 0414799014, 0414799017, 0414799019, 0414799022, 0986445003

to Cam Box 2 of the DORPAT stand Delivery set: clamp - 1 pc, fitting - 2 pcs, rubber-metal. gasket - 4 pcs.











OPTIONAL EQUIPMENT

DL-CB20136

Clamp for Land Rover-Discovery injectors (Delphi) to Cam Box 2

Delivery set: clamp - 1 pc, fitting - 2 pcs, rubber-metal. gasket - 4 pcs.

DL-CB20137KIT

Clamp for Caterpillar L10 injectors to Cam Box 2

Kit includes:

- Clamp adapter DL-CB20137
- Sealing washer SV230289
- Nozzle for sprayer **SV230282**
- Fitting to the adapter 2 pcs.
- Rubber-metal gasket 4 pcs.

Nozzle not included.

DL-CB20138KIT

Inspection and test kit pump injector Detroit 5234770-5235580 to CamBox 2 of the DORPAT stand. Contents of delivery:

- clip-adapter **DL-CB20138** 1 pc.
- nozzle pusher SV230276 1 pc.
- fixing bracket **SV230440** 1 pc.
- fitting to the adapter 2 pcs.
- rubber-metal gasket 4 pcs.

Nozzle not included.

DL-CB20139KIT

Inspection and test kit pump injector Cummins 4DEC01L4061851 to CamBox 2 of the DORPAT stand. Contents of delivery:

- clip-adapter **DL-CB20139** 1 pc.
- fixing bracket **SV230440** 1 pc.
- fitting to the adapter 2 pcs.
- rubber-metal gasket 4 pcs.

Nozzle not included.













OPTIONAL EQUIPMENT

DL-CB20140

Clamp for Scania injectors

0414701017, 0414701018, 0414701019, 0414701020, 0414701030, 0414701032, 0414701035, 0414701036, 0414701037, 414701038, 0414701040, 0414701042, 0414701043, 0414701044, 0414701045, 0414701069, 0414700002, 0414701005, 0414701007, 0414701008, 0414701016

to Cam Box 2 of the DORPAT stand

Delivery set: clamp - 1 pc, fitting - 2 pcs, rubber-metal. gasket - 4 pcs.

DL-CB20144

Clip for PLDDAF, MAK, Renault 0414755005, 0414755006, 0414755007, 0414755008, 0414755014, 0414755015, 0414755016, 0414755017, 0414755018

to Cam Box 2 of the DORPAT stand Delivery set: clamp - 1 pc, fitting - 2 pcs, rubber-metal. gasket - 4 pcs.

DL-CB20145

Clamp for PLD DELPHI to Cam Box 2 of the DORPAT stand Delivery set: clamp - 1 pc, fitting - 2 pcs, rubber-metal. gasket - 4 pcs.

DL-CB20146

Clamp for injectors Caterpillar L15 to Cam Box 2 of the DORPAT stand Delivery set: clamp - 1 pc, fitting - 2 pcs, rubber-metal. gasket - 4 pcs.

DL-CB20146KIT

Clamp for Caterpillar L15 injectors to Cam Box 2 Kit includes:

- Clamp adapter DL-CB20146
- Sealing washer **SV230289**
- Nozzle for sprayer **SV230282**
- Injector pusher CB230294
- Fixing bracket SV230283
- Fitting to the adapter 2 pcs.
- Rubber-metal gasket 4 pcs.

Nozzle not included.



286







DL-CB20149

Clamp for Bosch injectors 0414703004, 0414703008, 0414703009, 0414703013 **to Cam Box 2 of the DORPAT stand Delivery set:** clamp - 1 pc, fitting - 2 pcs, rubber-metal. gasket - 4 pcs.

DL-CB2 0151

Зажим для форсунок Audi / VW 1.9 0414720002, 0414720003, 0414720005, 0414720007, 0414720008, 0414720009, 0414720013, 0414720014, 0414720015, 0414720016, 0414720018, 0414720028, 0414720029, 0414720030, 0414720033, 0414720034, 0414720205, 0414720036, 0414720037, 0414720038, 0414720039, 0414720201, 0414720204, 0414720206, 0414720208, 0414720209, 0414720210, 0414720213, 0414720214, 0414720215, 0414720223, 0414720217, 0414720220, 0414720221, 0414720222, 0414720223, 0414720224, 0414720225, 0414720226, 0414720227, 0414720228, 041472029, 0414720230, 0414720231, 0414720232, 0414720301, 0414720302, 0414720303, 0414720304, 0414720305, 0414720311, 0414720312, 0414720313, 0414720314 **to Cam Box 2 of the DORPAT stand**

Delivery set: clamp - 1 pc, fitting - 2 pcs, rubber-metal. gasket - 4 pcs, tack - 1 pc, fixing screw - 1 pc.





DL-CB20152

Clamp for injectors Audi / VW 2.0 0414720401, 0414720402, 0414720403, 0414720404 to Cam Box 2 of the DORPAT stand Delivery set: clamp - 1 pc, fitting - 2 pcs, sealing washer - 4 pcs, fixing screw - 2 pcs.

DL-CB20153KIT

Inspection and test kit pump injector Bosch 0414703003 to CamBox 2 of the DORPAT stand. Contents of delivery:

- clip-adapter DL-CB20153 1 pc;
- nozzle pusher **SV230276** 1 pc;
- fitting to the adapter 2 pieces;
- rubber-metal gasket 4 pcs.

Nozzle not included.



287

OPTIONAL EQUIPMENT



DL-CB20154KIT

- Kit for checking and testing unit injectors CumminsHPI to DORPAT CamBox 2. Contents of delivery:
- clip-adapter **DL-CB20154** 1 pc.
- nozzle pusher CB230356 1 pc.
- nozzle for sprayer CB230357 1 pc.
- valve holder **CB230355** 1 pc.
- bracket **CB220007** for valve holder 1 pc.
- Timing valve 1 pc.
- Metering valve 1 pc.
- steel braided hose 2 pcs.
- fitting for a hose 4 pcs.
- fitting to the adapter 2 pieces;
- rubber-metal gasket 4 pcs.
- pressure nozzle 1 pc.



DL-CB20155

Clamp for injectors Delphi E1 (John Deere) to Cam Box 2 of the DORPAT stand

Delivery set: clamp - 1 pc, fitting - 2 pcs, rubber-metal. gasket - 4 pcs.

Nozzle not included.



DL-CB20156

Clamp adapter for testing unit injectors CAT 3920206

Delivery set: clip - 1 pc, fixing bracket - 1 pc fixing bolt of the clamp-lock 8x35 - 2 pcs fitting - 2 pcs, rubber-metal. gasket - 4 pcs

Nozzle not included.



DL-CB20157

Test adapter clamp pump injector Cummins 3053124

Delivery set: clamp - 1 pc, fitting - 2 pcs, rubber-metal. gasket - 4 pcs.

Nozzle not included.



CAM-BOX 2 MECHANIC

OPTIONAL EQUIPMENT





Injection sensor for unit injectors Cummins HPI



DL-CB250036KIT

injection sensor (piezo)





25-FPKM-04

Fitting - quick adapter for adapter

25-FPKF-04

Hydraulic Quick Connector female connections 1/4"



CAMBAT-FLOW

Injection meter for pump injectors of pump sections of the UIS/UPS system (for UIS-Tester MULTICAM).







UIS-TESTER MultiCAM

The UIS-Tester device is designed to test and verify the performance of unit injectors (UIS -Unit Injector System) and individual high-pressure fuel pumps with high-pressure solenoid valves (UPS -Unit Pump System).



CAMBAT-FULL

Equipment for testing and checking unit injectors and pump sections of the UIS / UPS system without a mechanical part.



Equipment CAMBAT-FULL includes:

- 1. Rack with measuring unit CAMBAT-FLOW
- 2. Control device for pump-injectors of pumping sections UIS-Tester MULTICAM
- 3. A set of connecting wires for injectors, measuring unit, etc.



CAMBAT-FULL-SET

Equipment for testing and checking the pump injector of pump sections of the UIS / UPS system with a mechanical part.




Equipment CAMBAT-FULL-SET includes:

292

- 1. Rack with measuring unit CAMBAT-FLOW
- 2. Control device for unit injectors and pump sections UIS-Tester MULTICAM
- 3. A set of connecting wires for injectors, measuring unit, etc.
- 4. The mechanical part for testing the pump-injector pump sections CAM-BOX MECHANIC



ОБОРУДОВАНИЕ и ИНСТРУМЕНТ для ремонта насос-форсунок (UIS) и насосных секций (UPS)

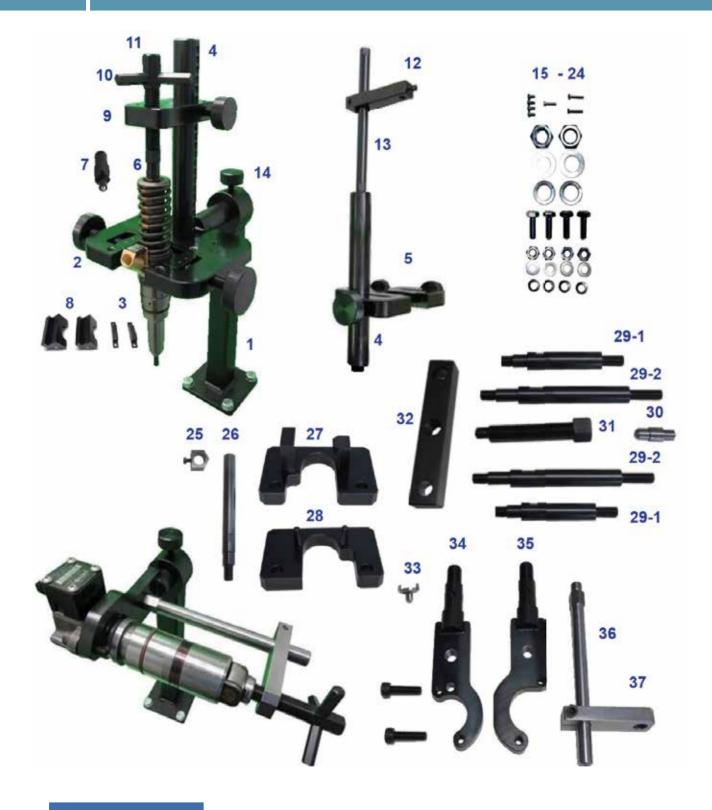

DL-ST02

6

Clamp for dismantling and assembling the unit injector of CR injectors with two stops on atomizer nozzles with Ø 7mm, with Ø 9mm.



Contents of delivery:

- 1. Rack **STD50115** 1 pc.
- 2. Large vice **STD50116** 1 pc.
- 3. Replaceable foot **STD30498** 2 pcs.
- 4. Guide post **STD30540** 1 pc.
- 5. Small vice **STD50117** 1 pc.
- 6. Stop Ø 7mm **STD30148** 1 pc.
- 7. Stop Ø 9mm STD30147 1 pc.
- 8. Replaceable foot **STD30752** 2 pcs.
- 9. Bracket STD30610 1 pc.
- 10. Handle **STD30811** 3 pcs.
- 11. Clamping screw **STD30810** 1 pc.
- 12. Holder **STD30813** 1 pc.
- 13. STD30812 axle 1 pc.
- 14. Retainer **STD30468** 3 pcs.
- 15. Screw **M4x8 Din012** 4 pcs.
- 16. Screw **M4x16 Din012** 1 pc.
- 17. Screw **M4x20 Din012** 2 pcs.
- 18. Nut M20 Din034 2 pcs.
- 19. Washer 21x37x3 **Din0125** 2 pcs.

- 20. Grover 20 Din127 2 pcs.
- 21. Bolt M10x30 **Din033** 4 pcs.
- 22. Nut M10 Din034 4 pcs.
- 23. Washer 10.5x20x2 **Din0125** 4 pcs.
- 24. Grover10 Din127 4 pcs.
- 25. Viewfinder for goniometer **DL-STD30874**
- 26. Axis under the sight **DL-STD30873**
- 27. Clamp STD50010 VW1.9 1 pc.
- 28. Clamp **STD50009** VW2.0 1 pc.
- 29-1. Short stand **STD31245** 2 pcs.
- 29-2. Extended stand STD30657 2 pcs.
- 30. Stop **STD30678** 1 pc.
- 31. Bolt STD30658 1 pc.
- 32. STD30656 bar 1 pc.
- 33. Stop **STD30673** 1 pc.
- 34. Holder AT **STD50077** 1 pc.
- 35. Speaker holder STD50078 1 pc.
- 36. Rack **STD30672** 1 pc.
- 37. STD30671 bar 1 pc.



Clamp installation unit injector AUDI / VW 1.9



Clamp installation injector pump SCANIA H-shaped



294

EQUIPMENT and TOOLS for the repair of unit injectors (UIS) and pump sections (UPS)

6



Installation in a tube injector pump VOLVO Delphi 2x and 4x contact



Clamp installation injector pump SCANIA



Clamp installation pump section Delphi 082240354



Clamp installation pump section DAF Bosch 0414755005



Clamp installation pump section MV ATEGO



Clamp installation pump section MV ACTROS





OPTIONAL CLAMP DL-ST02





DL-STD50206

Injector holder AUDI / VW 1.9 to adjust el. magnetana clamp ST-01 / ST-02







DL-STD50207

Injector holder AUDI / VW 2.0 to adjust el. magnetana clamp ST-01 / ST-02







Key for positioning the electromagnet in the pump injectors BOSCH AUDI / VW 1.9

Contents of delivery:

- Key for electromagnet
- Key positioner

Analog BOSCH 0986610318



DL-UIS50195

Key for positioning the electromagnet in the pump injectors BOSCH AUDI / VW 2.0

Contents of delivery:

- Key for electromagnet
- Key positioner

Analog BOSCH 0986610318







(8 faces, 38mm) Wrench for mounting / dismounting the electromagnet nut valve injector pump Bosch (Iveco, Scania, Volvo)

DL-UIS31438

(12 faces, 39mm) Wrench for mounting / dismounting the electromagnet nut valve injector pump Bosch (Volvo)



DL-UIS30693

Hex wrench for mounting / dismounting the nut injector nozzle Audi / VW1,9 **Applicability:** PDE-P1,PDE-P1,1,PDE-P1,3,PDE-P1,4



DL-UIS30724

Wrench for mounting / dismounting the atomizer nut unit injectors Audi / VW 2.0 TDI Bosch **Applicability:** 414720403, 0414720404





DL-UIS30725

Octagonal wrench for mounting / dismounting the nut atomizer pump-injector Audi / VW 1.9-5.0 PDE-P1.5. **Applicability:** 0414720309-2.5, 0414720359-2.5, 0414720310-2.5, 0414720360-2.50414720305-5.0, 0414720301-5.0, 0414720302-2.0, 0414720361-5.0 0414720306-2.0, 0414720302-2.0, 0414720312-2.0, 0414720362-2.0 0414720307-1.9, 0414720303-1.9, 0414720313-1.9, 0414720363-1.9 0414720308-1.9, 0414720304-1.9, 0414720314-1.9, 0414720364-1.9

DL-UIS30751

Octagonal wrench 17mm for atomizer nut unit injectors Audi / VW Siemens VDO (PIEZO)



298



Wrench for mounting / dismounting the electromagnet nut unit injectors Audi / VW 2.0 **Applicability:** 0414720403, 0414720404



DL-UIS30733

Wrench for mounting / dismounting the electromagnet nut unit injector Audi / VW 1.9 **Applicability:** 0414720029-0414720215



DL-UNI30667

29 mm hex wrench for mounting / dismounting AUDI / VW injector housing nuts **Applicability:** 0414720400, 0414720401, 0414720402, 0414720403, 0414720453, 0414720454





DL-UNI30668

Key 30 mm octagonal for mounting / dismounting VW SIEMENS injector housing nuts









DL-UNI50011

Wrench for mounting / dismounting the spray nut Ø 27 mm injectors Volvo, Delphi, Lucas (for torque wrench)

DL-UNI50313

Wrench for mounting / dismounting the spray nut Ø 28 mm unit injector Cummins 3053124 (for torque wrench)

DL-UNI50127

Wrench for mounting / dismounting the spray nut Ø 29.4 mm injectors Caterpillar C12, C15 (for torque wrench)

DL-UNI50012

Wrench for mounting / dismounting the spray nut Ø 31.5mm Cummins (Scania) HPI injectors (for torque wrench)

DL-UNI50048

Wrench for mounting / dismounting the nut Ø 36.2 mm PLD sections Delphi 1668325 (for torque wrench)





DL-UNI30763

Wrench for mounting / dismounting the spray nut Ø 32mm Bosch unit injectors Applicability: 0414701005, 0414701006, 0414701008, 0414702002, 0414702007, 0414702010, 0414703008

DL-UIS30880

Caterpillar injector holder adapter C12, C15 in a vice



300



Valve Stroke Kit unit injector AUDI / VW BOSCH 1.9/2.0

Contents of delivery:

- 1. **DL-UIS31069** Double-sided clip
- 2. DL-UIS31070 Measuring head adapter.
- 3. **DL-UIS31071** The washer is stubborn.
- 4. DL-UIS31072 Calibration plate
- 5. **DL-CRN30503** Measuring probe

ATTENTION! Measuring indicator head in delivery set is not included!



DL-UIS30827

Stand adapter for indicator for measuring the air gap in the housing injector pump



DL-UIS50102

Adapter for indicator for stroke measurement injector valve Bosch



DL-UIS50100

Wrench for mounting / dismounting and adjustment pump-injector solenoid nuts Audi / VW 1.9 TDI (Bosch) on the stand. Applicability: 0414720029 -0414720215

DL-UIS50101

Wrench for mounting / dismounting and adjustment pump-injector solenoid nuts Audi / VW 2.0 TDI



301



SET OF KEYS FOR DISASSEMBLY-ASSEMBLY OF PUMP INJECTORS AUDI / VW

1. DL-UIS30667

Wrench 29mm hex for mounting / dismounting the nut of the unit injector housing AUDI / VW 2.0 , PDE-P2. Applicability: 0414720400 0414720401 0414720402 0414720403 0414720453 0414720454

2. DL-UIS30668

Wrench 30 mm octagonal for mounting / dismounting the nut of the unit injector housing VW Siemens

3. **DL-UIS50100**

Wrench for mounting / dismounting and adjusting the nut of the electromagnet of the unit injector Audi / VW 1.9-5.0 (Bosch) on the stand. Applicability: 0414720029-0414720215

4. DL-UIS30726

Wrench for assembly / disassembly of the solenoid nut of the pump injector Audi / VW 2.0 Bosch Applicability: 0414720403 0414720404

5. DL-UIS30725

Octagonal wrench for mounting / dismounting the nozzle nut of the unit injector Audi/ VW 1.9-5.0, PDE-P1.5. Applicability: 0414720309-2.5 l. 0414720359-2.5 l. 0414720310-2.5 l. 0414720360-2.5 l. 0414720305-5.0 l. 0414720301-5.0 l. 0414720311-5.0 l. 0414720361-5.0 l. 0414720306-2.0 l. 0414720302-2.0 l. 0414720312-2.0 l. 0414720362-2.0 l. 0414720307-1.9 l. 0414720303-1.9 l.0414720313-1.9 l. 0414720363-1.9 l. 0414720308-1.9 l. 0414720304-1.9 l. 0414720314-1.9 l.0414720364-1.9 l.

6. DL-UIS30693

302

Hexagonal wrench for mounting / dismantling the sprayer nut of the unit injector Audi / VW 1.9, PDE-P1 PDE-P1.1 PDE-P1.3 PDE-P1.4



7. DL-UIS50101

Wrench for adjusting the solenoid nut NF Audi / VW 2.0

8. DL-UIS30733

Wrench for mounting / dismantling the nut of the electromagnet of the unit injectors Audi / VW 1.9 TDI Bosch Applicability: 0414720029-0414720215

9. DL-UIS30724

Wrench for mounting / dismantling the sprayer nut of the pump injector Audi / VW 2.0 Bosch Applicability: 0414720403 0414720404

10. **DL-UIS30751**

Octagonal wrench 17mm for Audi / VW injector nozzle nut Siemens VDO (PIEZO)

11. **DL-UIS30757**

Dodecahedral key for mounting / dismounting of the piezoelectric element.



DL-VW2-SVDO

Tool kit for disassembly-assembly NF Audi/VW Siemens VDO

1. **DL-UIS30668**

Wrench 30 mm octagonal for mounting / dismounting the nut of the VW SIEMENS unit injector body

2. DL-UIS30751

Octagonal wrench 17mm for Audi / VW Siemens VDO (PIEZO) sprayer nut

3. DL-UIS30757

Dodecahedral key for installation / dismantling of the piezoelectric element NF Siemens VDO





DL-VW PDE

TOOL KIT FOR DISASSEMBLY-ASSEMBLY NF AUDI / VW1,9 PDE-P1.5

1. DL-UIS50100

Wrench for mounting / dismounting and adjusting the nut of the electromagnet of the unit injector Audi / VW 1.9-5.0 (Bosch) on the stand. Applicability: 0414720029-04147202152

2. DL-UIS30733

Wrench for mounting / dismounting the nut of the electromagnet of the pump injectors Audi / VW 1.9 Bosch TDI. Applicability: 0414720029-0414720215

3. DL-UIS30725

Octagonal wrench for mounting / dismounting the nozzle nut of the unit injector Audi/VW 1.9-5.0, PDE-P1.5. Applicability: 0414720309-2.5 I. 0414720359-2.5 I. 0414720310-2.5 I. 0414720360-2.5 I. 0414720305-5.0 I. 0414720301-5.0 I. 0414720311-5.0I. 0414720361-5.0I. 0414720306-2.0 I. 0414720302-2.0 I. 0414720312-2.0 I. 0414720362-2.0 I. 0414720307-1.9 I. 0414720303-1.9 I.0414720313-1.9 I. 0414720363-1.9 I. 0414720308-1.9 I. 0414720304-1.9 I. 0414720314-1.9 I.0414720364-1.9 I.

4. DL-UIS30693

304

Hexagonal wrench for mounting / dismantling the nut of the Audi / VW 1.9 injector sprayer PDE-P1 PDE-P1.1 PDE-P1.3 PDE-P1.4





3

DL-VW-PDE-2

Tool kit for disassembly-assembly NF Audi / VW 2.0

1. DL-UIS30667

Wrench 29mm hex for mounting / dismounting the nut of the unit injector housing AUDI / VW 2.0 , PDE-P2. Applicability: 0414720400 0414720401 0414720402 0414720403 0414720453 0414720454

2. DL-UIS30726

Wrench for mounting / dismounting the solenoid nut of the pump injector Audi / VW 2.0 Bosch. Applicability: 0414720403 0414720404

3. DL-UIS50101

Wrench for adjusting the solenoid nut NF Audi / VW 2.0

4. DL-UIS30724

Wrench for assembly / disassembly of the nozzle nut of the pump-injector Audi / VW 2.0 Bosch Applicability: 0414720403 0414720404







Adapter for testing the injector part Bosch injectors (Scania, Volvo, IVECO CURSOR TYPE 350).

DL-UIS30591

Adapter for testing the injector part pump-injector Bosch (Volvo).



Adapter for testing the injector part

DL-UIS30594

pump-injector Volvo 520 CV.

DL-UIS30597

Adapter for testing the injector part pump-injector Delphi (Volvo Tape A).



DL-UIS30598

Adapter for testing the injector part pump injector Detroit .



DL-UIS30606

Adapter for testing the injector part pump injectors Cummins L10-M11.







Adapter for testing the injector part injectors Volvo 460 2 tape, Scaniapumps.

DL-UIS30631

Adapter for testing the injector part pump injectors EUI / PDE Cummins N14 pumps.

DL-UIS30634

Adapter for testing the injector part unit injector EUI / PDE Audi, VW 2. (2.0 liters)



DL-UIS50082

Adapter for testing the injector part pump injectors EUI / PDE Audi, VW pumps all types except EUI / PDE Audi, VW 2. (2.0 liter)



DL-UIS30643

Adapter for testing the injector part unit injector EUI / PDE Iveco Stralis 500 HP. 0414703004, 0414703008, 0414703010.



DL-UIS30640

Adapter for testing the injector part Cummins pump injectors.







Adapter for testing the injector part pump injector Volvo Delphi 4PIN.

DL-UIS50079

Injector test adapter injectors Audi, VW. 04147203XX for assembly on a clamp.





DL-UIS50081

Adapter for testing the injector part injector pump Audi, VW.04147200XX, 04147202XX, 04147204XX, 04147206XX for assembly on a clamp.

DL-UIS30638

Adapter for testing the injector part unit injectors EUI / PDE Audi, VW 2. (2.0 liters). 1 681 398 033 for assembly on a clamp.



DL-UIS30662

Adapter for testing the injector part pump injectors Audi, VW Siemens VDO piezo for assembly on a clamp.



DL-UIS30770

Adapter for testing the injector part unit injector EUI / PDE Nissan 440 (M31x1).



DL-UIS31507

Adapter for testing the injector part of the pump injector EUI / PDE HYUNDAI 22880-84001(M28x1)



6

АДАПТЕРЫ ДЛЯ CATTERPILLAR



DL-UIS30789

Adapter for testing the injector part injector pump EUI / PDE HEUICAT 3126 The adapter has a connecting thread M28x1

DL-UIS30768

Adapter for testing the injector part unit injector EUI / PDE Caterpillar series 3500 The adapter has a connecting thread M27x1.5

DL-UIS30769

Adapter for testing the injector part injector unit EUI / PDE Caterpillar Marino Adapter has a connecting thread M36x1.5

DL-UIS30897

Adapter for testing the injector part unit injectors EUI / PDE CAT C15, C16. The adapter has a connecting thread M33x1.5

DL-UIS31441

Adapter for testing the injector part unit injector Caterpillar CAT C12 The adapter has a connecting thread M28x1

DL-UIS31511

Adapter for testing the injector part of the pump injectors EUI / PDE Caterpillar CAT3112 The adapter has a connecting thread M36x1.5 and longer than DL-UIS30769

DL-UIS31559

Adapter for testing the injector part of the pump injectors CAT M32. The adapter has a connection thread M32x1.5mm Has two holes for atomizer pins.





ADAPTERS FOR CATERPILLAR



DL-TRUKUSA-04CAT

Test Adapter Kit injector part of unit injectors american trucks manufactured by CATERPILLAR. • DL-UIS30789

- DL-UIS30768
- DL-UIS30769
- DL-UIS30897



DL-TRUKUSA-05CAT

Set of adapters for checking the injector truck injector parts American made CATERPILLAR

- DL-UIS30789
- DL-UIS30768,



DL-TRUKUSA-06CAT

Set of adapters for checking the injector truck injector parts American made CATERPILLAR DL-UIS30789

- DL-UIS30768
- DL-UIS30769
- DL-UIS30897
- DL-UIS31441
- DL-UIS31511



DL-TRUKUSA-07CAT

Set of adapters for checking the injector truck injector parts American made CATERPILLAR • DL-UIS30789

- DL-UIS30768
- DL-UIS30769
- DL-UIS30897
- DL-UIS31441
- DL-UIS31511
- DL-UIS31559



• DL-UIS30769 DL-UIS30897 • DL-UIS31441



ADAPTER SETS FOR CHECKING THE INJECTOR PART



DL-TRUSA-04BR

Set of adapters for checking the injector truck injector parts American production CUMMINS and DETROIT.

(DL-UIS30598-DETROIT, DL-UIS30606-CUMMINS L10-M11, DL-UIS30631-CUMMINS N14, DL-UIS30640-CUMMINS)



DL-TRUKE-07BR

Test Adapter Kit injector part of unit injectors European cars.

(DL-UIS30590 - BOSCH (Scania, Volvo, Iveco Cursor), DL-UIS30591 - BOSCH (Volvo), DL-UIS30594 -Volvo 520CV, DL-UIS30597 - DELPHI (Volvo Tape A), DL-UIS30627 - (Volvo 460 Tape 2, Scania), DL-UIS30635 - DELPHI (Volvo 4 Pin), DL-UIS30643 - (Iveco Stralis 500HP)



DL-VW-4BR

Set of adapters for checking the injector AUDI / VW car injector parts all types. (DL-UIS50079-AUDI/VW 04147203XX, DL-UIS50081-AUDI/VW 04147200XX, 04147202XX, 04147204XX, 04147206XX, DL-UIS30638-EUI / PDE AUDI/VW 2.0 Liter (TYPE2), DL-UIS30662-AUDI / VW SIEMENS VDO piezo)





DL-RP400

Manual press for injector testing with mechanical pressure gauge

Contents of delivery:

- mechanical press 1 pc.
- mechanical pressure gauge 1 pc.
- connecting tube 2 pcs.



DL-RP410	(without pressure sensor)
DL-RP415	(with pressure sensor. 1500 bar)

Manual press for injector testing with electronic pressure gauge

Contents of delivery:

- mechanical press 1 pc.
- connecting tube 2 pcs.
- electronic pressure gauge with cable 1 pc.
- battery charger 1 pc.
- pressure sensor (for RP 415) for 1500 bar 1 pc.

DL-RP420	(without pressure sensor)
DL-RP425	(with pressure sensor. 1500 bar)

Manual press for injector testing with 2-channel electronic pressure gauge

Contents of delivery:

- mechanical press 1 pc.
- connecting tube 2 pcs.
- electronic pressure gauge with cable 1 pc.
- battery charger 1 pc.
- pressure sensor (for **RP 425**) for 1500 bar 1 pc.



DL-RP430

Manufacturer - ZECA (Italy) Flame test chamber (aspirator) nozzle spray Allows for visual inspection performance of diesel injectors without harm to health. The device is going to work liquid for reuse.



dieselland.ru | dieselland.biz | dieselland@mail.ru

312



DL-RP500

Manufacturer - ZECA (Italy) Manual press for injector testing with mechanical pressure gauge

Contents of delivery:

- mechanical press 1 pc.
- mechanical pressure gauge 1 pc.
- connecting tube 2 pcs.



DL-RP510	(without pressure sensor)

DL-RP515 (with pressure sensor. 1500 bar)

ZECA hand press for injector testing with electronic pressure gauge

Contents of delivery:

- mechanical press 1 pc.
- connecting tube 2 pcs.
- electronic pressure gauge with cable 1 pc.
- battery charger 1 pc.
- pressure sensor (for RP 515) for 1500 bar 1 pc.



DL-RP520	(without pressure sensor)
DL-RP525	(with pressure sensor. 1500 bar)

ZECA hand press for injector testing with 2-channel electronic pressure gauge

Contents of delivery:

- mechanical press 1 pc.
- connecting tube 2 pcs.
- electronic pressure gauge with cable 1 pc.
- battery charger 1 pc.
- pressure sensor (for RP 525) for 1500 bar 1 pc.





A set of diamond laps and reamers for restoring the landing BOSCH unit injector valve locations.

Contents of delivery:

- 1. DL-UIS1368063 Diamond conical lap with pilot (L 136°) 80/63
- 2. DL-UIS1364028 Diamond conical lap with pilot (L 136°) 40/28
- 3. DL-UISPA78063 Diamond reamer RA ©7 80/63
- 4. DL-UISPA74028 Diamond reamer RA of 40/28
- 5. **DL-UIS50193** Guide puller with split sleeve
- 6. **DL-UIS50247** Diamond reamer jacket puller
- 7. DL-UNI30975 Handle for lapping 2 pcs.
- 8. **DL-UNI30978** Handle fixing screw 2 pcs.

Injector valve for VOLVO, SCANIA, IVECO:



D-GR02X \ 136 \ 7,010
D-GR02X \ 136 \ 7,015
D-GR02X \ 136 \ 7,020
D-GR02X \ 136 \ 7,025
D-GR02X \ 136 \ 7,035
D-GR02X \ 136 \ 7,040
D-GR02X \ 136 \ 7,045
D-GR02X \ 136 \ 7,050
D-GR02X \ 136 \ 7,055
D-GR02X \ 136 \ 7,060
D-GR02X \ 136 \ 7,070
D-GR02X \ 136 \ 7,080





Set of diamond laps and reamers to restore a seat BOSCH unit injector valves

Contents of delivery:

- 1. Diamond conical lap (L 136°) "coarse" 1 pc.
- 2. Diamond conical lap (L 136°) "finish" 1 pc.
- 3. Pilot for lapping diamond conical 2 pcs.
- 4. Diamond reamer 1 pc.
- 5. Pilot for reaming 1 pc.
- 6. Handle to hold the pilot 1 pc.
- 7. Cap for pressing on the reamer and laps 3 pcs.
- 8. Brush for cleaning the NF valve channel 1 pc.
- 9. Organizer 1 pc.



DL-UIS50257

Set of diamond laps and reamers to restore a seat DETROIT unit injector valves

Contents of delivery:

- 1. Diamond conical lap "coarse" 1 pc.
- 2. Diamond taper lap "finish" 1 pc.
- 3. Pilot for lapping diamond conical 2 pcs.
- 4. Diamond reamer 1 pc.
- 5. Pilot for reaming 1 pc.
- 6. Handle to hold the pilot 1 pc.
- 7. Cap for pressing on the reamer and laps 3 pcs.
- 8. Brush for cleaning the NF valve channel 1 pc.
- 9. Organizer 1 pc.



DL-UIS50255

Set of diamond laps and reamers to restore a seat BOSCH unit injector valves

Contents of delivery:

- 1. Diamond conical lap (L 136°) "coarse" 1 pc.
- 2. Diamond conical lap (L 136°) "finish" 1 pc.
- 3. Pilot for lapping diamond conical 2 pcs.
- 4. Diamond reamer 1 pc.
- 5. Pilot for reaming 1 pc.
- 6. Handle to hold the pilot 1 pc.
- 7. Cap for pressing on the reamer and laps 3 pcs.
- 8. Brush for cleaning the NF valve channel 1 pc.
- 9. Flashlight 1 pc.
- 10. Organizer 1 pc.



ОСНАЩЕНИЕ И ИНСТРУМЕНТ ДЛЯ ПРОВЕРКИ И РЕМОНТА НАСОС-ФОРСУНОК НЕUI

HEUI CATERPILLAR 3126B, CATERPILLAR 3126E µ FORD 1998-2003 DIESEL 7.3 FUEL INJECTOR 128-6601, AD1831489C1 (INTERNATIONAL)



Equipment includes:

- 1. DL-HEUI50223
- Pump installation adapter nozzles



HEUI CATERPILLAR C7-C9



Equipment includes:

- 1. DL-HEUI50221
- Pump installation adapter nozzles



- 2. DL-HEUI50240 Set of hydraulic hoses and HPT 400mm 14x14mm
- 3. DL-HEUI50218 Adapter holder with clamping bar
- 4. DL-HEUI50230 Adapter cable for connecting the pump injector
- 5. DL-UNI50084 Corner adapter M14



Attention! All accessories are sold separately.



EQUIPMENT AND TOOLS FOR CHECKING AND REPAIRING HEUI INJECTORS



DL-UNI50208

Wrench for unscrewing the atomizer nut injectors Caterpillar C7-C9. Key working diameter 24 mm

DL-UIS30789

Adapter for testing the injector part injector pump EUI / PDE HEUICAT 3126 The adapter has a connecting thread M28x1

DL-HEU50251

Seal kit HEUI CAT C7-C9 unit injector rings



DL-HEUI31342

Upper case for pump-injector installations high pressure supply.



DL-HEU31332

Lower housing for low pressure supply




DL-HEU50227

Protective screen with cover from polycarbonate. (DL-HEU31333 Protective polycarbonate screen)(DL-HEU31334 Lid protective screen)



DL-HEU31335





dieselland.ru | dieselland.biz | dieselland@mail.ru

SPF-708, SPF-712, SPF-1108, SPF-1112

The assay stand is designed for testing and adjusting with increased accuracy of in-line injection pumps, V-shaped injection pumps, distribution-type injection pumps with independent and forced lubrication systems, a pressurization corrector of all domestic manufacturers and major foreign ones: "BOSCH", "LUCAS", "ZEXEL", NIPPON DENSO.

When using additional equipment, the stand allows you to test and check:

- Common-Rail injectors (BOSCH, DELPHI, DENSO, SIEMENS)
- Common-Rail pumps (CP1, CP2, CP3) (BOSCH, DELPHI, DENSO)
- regulators and pressure sensors CR-pump-injectors of European and American cars
- electronic pumps such as VE, VP, Zexel, PE.

Stands are produced with a power of 7.5 kW (SPF-308, SPF-712), 11 kW (SPF-1108, SPF-1112). Stands SPF-708 and SPF-1108 have an 8-section measuring block. Stands SPF-712 and SPF-1112 have a 12-section measuring block.


The stand is equipped with:

- integrated personal computer
- monitor
- · control panel of the stand and booster pump
- protective fence with 2 doors made of polycarbonate
- cooling unit of radiator-fan type for 2 channels
- cooling unit of radiator-fan type for 1 channel





STANDS for testing fuel pumps high pressure injection pump

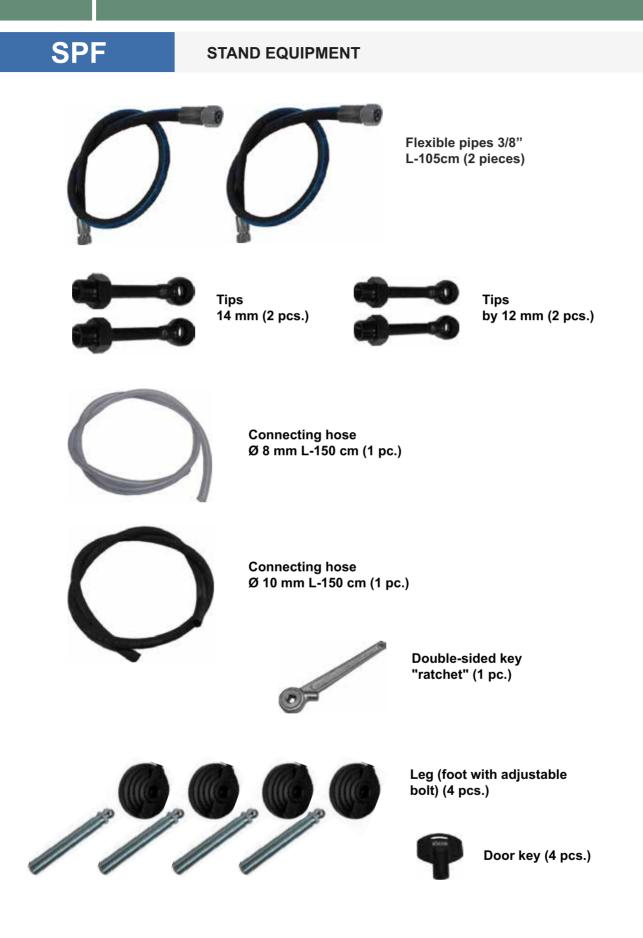



PTB-3, PTB-5, PTB-7, PTB-9, PTB-12

The assay stand is designed for testing and adjusting with increased accuracy of in-line injection pumps, V-shaped injection pumps, distribution-type injection pumps with independent and forced lubrication systems, a pressurization corrector of all domestic manufacturers and major foreign ones: "BOSCH", "LUCAS", "ZEXEL", NIPPON DENSO.

When using additional equipment, the stand allows you to test and check:

- Common-Rail injectors (BOSCH, DELPHI, DENSO, SIEMENS)
- Common-Rail pumps (CP1,CP2,CP3) (BOSCH,DELPHI,DENSO)
- Regulators and pressure sensors CR
- injectors of European and American cars
- electronic pumps such as VE, VP, Zexel, PE.

Stands are produced with capacity:

PTB-3 - 15 kW PTB-5 - 18 kW PTB-7 - 22 kW PTB-9 - 30 kW PTB-12 - 37kW





PTB14

with additional oil station and tank

The assay stand is designed for testing and adjusting with increased accuracy of in-line injection pumps, V-shaped injection pumps, distribution-type injection pumps with independent and forced lubrication systems, a pressurization corrector of all domestic manufacturers and major foreign ones: "BOSCH", "LUCAS", "ZEXEL", NIPPON DENSO.

When using additional equipment, the stand allows you to test and check:

- Common-Rail injectors (BOSCH, DELPHI, DENSO, SIEMENS)
- Common-Rail pumps (CP1,CP2,CP3) (BOSCH,DELPHI,DENSO)
- Regulators and pressure sensors CR
- injectors of European and American cars
- electronic pumps such as VE, VP, Zexel, PE.

The stand is produced with a capacity of 45 kW





PTB

TECHNICAL DETAILS

Stands of the **PTB** series for checking high-pressure fuel pumps allow you to perform all procedures related to testing and adjusting high-pressure fuel pumps in accordance with international ISO standards:

- drive system with smooth speed control;
- power supply system with smooth pressure regulation;
- pneumatic system with smooth pressure adjustment;
- a block for measuring the dosage of the strait;
- fastening elements of tested pumps.

The design of the injection pump test bench and its equipment elements meet the requirements of international standards in terms of static and dynamic parameters - ISO4008/1 and ISO4008/2

Technical data of PTB series stands:

rotational speed	30–3000min-1
direction of rotation	left / right
engine power (nom.)	from 15kW to 45kW by modification
programmable number of shots	50–1000
tank capacity	30-160 dm ³ by modification
number of sections	eight
measuring beaker capacity	44 and 260 +/- 0.25cm ³
supply voltage	3x400V/230V~50Hz
shut-off valve supply	12V / 24V
distance from the plate to the axis of the drive	125mm-170mm by modification
compensation sleeve diameter	110mm
feed pump performance assay oil at 3bar	6,5dm³
high pressure gauge	0÷10Bar
maximum current	24.5A (38.5A) by modification
total weight and dimensions L(length) x B(width) x H(height)	1830 x 1710(900) x 1670



OPTIONAL EQUIPMENT AND ACCESSORIES TO STANDS FOR CHECKING FUEL PUMPS OF HIGH PRESSURE



DL-MSP

Mobile oil station for stands





OPTIONAL EQUIPMENT AND ACCESSORIES TO STANDS FOR CHECKING FUEL PUMPS OF HIGH PRESSURE



MZK-45

Measuring cylinder 45ml (beaker) for stands injection pump checks Length - 320mm Diameter - 18mm Scale – 0-150ml Division price - 0.2ml

MZK-260

Measuring cylinder 260ml (beaker) for stands injection pump checks Length - 320mm Diameter - 38mm Scale - 0-260ml Division price - 2ml



MZK-150

Measuring cylinder 150ml (beaker) for stands injection pump checks Length - 320mm Diameter - 28mm Scale – 0-150ml Division price - 1ml





Bracket-holder for MZK-260 for 260ml



SDMZ-28

Bracket-holder for MZK-150 for 150ml

SDMZ-18

Bracket-holder for MZK-45 for 45ml



DL-OHL

Fridgestand air conditioner



OPTIONAL EQUIPMENT AND ACCESSORIES TO STANDS FOR CHECKING FUEL PUMPS OF HIGH PRESSURE



DL-UNI50132

Compensation clutch with clamping jaws and reinforced package plates



DL-MS9

Coupling slotted for CR injection pump (for Renault slot 9x20)



DL-UNI50139

Compensation clutch with flange connection and reinforced package plates (analogue Bosch 1686401024)



DL-MS10D

Coupling slotted for injection pump CR Denso, slot 10x23



DL-CB2 30016

Conical coupling with flange connection Ø 30 mm Cam Box2, injection pump



DL-MS10S

Coupling slotted for Siemens Peugeot injection pump Boxer 2.2, slot 10x21.6

DL-MS11

Coupling slotted for injection pump CR MAN (11 splines)



DL-M24 (UNI30127)

Cone coupling Ø 24 mm for injection pump CRSR-3 mod.044502088

DL-M24L (CR31098)

for injection pump DENSO HP0

Long sleeve Ø 24 mm



DL-M17

Cone coupling Ø 17mm for injection pump CR and injection pump VE

DL-M19

Cone coupling \emptyset 19 mm for CR and VE injection pumps




DL-MS8

Coupling slotted for injection pump CR (for MV slot 8x18)



DL-M23 (UNI30917)

Conical coupling for 23 for injection pump Continental A2C59517053, Bosch CR\ CP4HS2 0445010637, CP4S2 0445010611, CP4S1 0445010506





dieselland.ru | dieselland.biz | dieselland@mail.ru







DL-UNI50051-KIT

VE injection pump test kit


Contents of delivery:

- Holder frame for 6 nozzles
- Profile bolt for fastening the frame
- Injector fixing screws 6 pcs.
- Injector holder fastening screws 2 pcs.
- Defoamers for spilling liquid 6 pcs.
- Fitting 6mm x 1/4 for defoamer 6 pcs.
- Nozzle nozzle 6 pcs.
- Fitting 6mm x 1/8 for nozzle 6 pcs.
- PVC pipe Ø6mm for connection 12m



DL-UNI50051

Frame-holder nozzles with profile mounting bolt and fixing screws nozzles



34-RWN-06x04

Connective PVC tube Ø6mm



adapter to

DL-UNI30452

nozzle with fitting 6mm x 1/8"



DL-PG(CR26)

Defoamer liquids with fitting 6mm x 1/4"



326



DL-UNI30465

Mounting flange Ø 50/60mm for high pressure fuel pump VE and for high pressure fuel pump CR (BMW, RENAULT, MB, Peugeot



DL-CB1 30139

Cone coupling Ø 30 mm Cam Box2, injection pump




DL-CR30466

Mounting flange Ø 68 mm, for injection pump CR Renault Megane, Delphi Siemens VDO, Land Rover, RangeRoverV8 and for HPFP VE



DL-M17

Cone coupling \emptyset 17 mm for CR and VE injection pumps



DL-UNI30467

Mounting flange Ø 70mm for injection pump VE



DL-M19

Cone coupling \emptyset 19 mm for CR and VE injection pumps



DL-UNI30521

Mounting flange Ø 105mm for injection pump MTZ-50, MTZ-80, MTZ-82, MTZ-825, T16, T25, T30, T40, SND-18, SND-17, SND-14.



DL-UNI50008

Bracket for pumps, Bosch standard 125 mm. Installed on a stand.





DL-UNI30514

Mounting kit to the stand of in-line pumps Bosch-Kamaz (similar to Bosch1688030141)

Contents of delivery:

- support 2 pcs.
- profile bolt 2 pcs.
- nut 2 pcs.
- washer 2 pcs.
- grower 2 pcs.



DL-UNI30525

Stand support in-line pumps MAN double rail (similar to Bosch1688030184)

- support 1 pc.
- profile bolt 1 pc.
- nut 1 pc.
- washer 1 pc.
- grower 1 pc.






DL-UNI50042

indicator fixture measuring rack travel in-line pumps BoschP (P7100, P8500).

Completed

- adapters: • 18x1.5 (B, BV pumps)
- 20x1.5 (A pumps)
- 24x1.5 (P pumps)
- 24x1.5 (8500 pumps)



Comparator for P7000 / 8500 pumps to determine the height of the start of the feed. Connection 24x1.5mm.

DL-UNI50040

Retainer-eccentric plungers in-line pumps BoschP (P7100, P7800).

DL-RD30765

Wrench for repairing mechanical nozzles with a 28 mm hexagon.

DL-RD30766

Wrench for repairing mechanical nozzles with hexagon 27mm.















DL-UNI30786 (VP3)

Coupling for fastening to the pump flange for High pressure fuel pump series VP (Opel)

DL-UNI30787 (VP4)

Coupling for fastening to the pump flange for VP series injection pump (Audi / VW, BMW, MB)

DL-UNI30788 (VP5)

Coupling for fastening to the pump flange for injection pump series VP (Ford)

DL-UNI30603 (VP6)

Coupling for fastening to the pump flange for High pressure fuel pump series VP (Nissan Almera, Tino, Terano 3, Patrol 3.0)

DL-VPLO

Lodgment for injection pump VP series, Opel

DL-VPLA

Lodgment for injection pump VP, Aud/VW, BMW, MB series





Universal cradle for CR pumps

Delivery set DL-USN0021 (ST-03):

- 1. Rotary stand 1 pc.
- 2. Set of flanges for fastening CR pumps of 6 pcs.
- 3. Set of 4 pump support plates.

Delivery set DL-USN0021CR (ST-03CR):

- 1. Rotary stand 1 pc.
- 2. Set of flanges for fastening CR pumps of 6 pcs.

ATTENTION!

0

Holder plates for high pressure fuel pumps CR and rotary high pressure fuel pumps are also sold separately!







CR TESTER . CRT-5040

4-channel device for testing and testing Common Rail injectors Bosch, Denso, Delphi, Siemens VDO with a set of cables.

The device has the ability to connect to the FLAGMAN-FLOW beakerless measuring system with the ability to generate correction codes for Delphi C2i / C3i, BOSCH, DENSO injectors

The **CR TESTER. CRT-5040** has the functions of controlling the curtain of the metering unit, stopping the high-pressure pump, measuring and controlling the temperature in the tank, measuring the temperature of the back-tested injectors, measuring the injection start time, etc.

Computer control of the set through the CASCADE software.





ELECTRONIC DEVICES for diagnostics and repair of diesel fuel equipment



FLAGMAN-FLOW

CR injector dosage measuring unit, 8-channel for CR-TESTER device. CRT-5040

Computer control of the set through the CASCADE software.

FLAGMAN-FULL

CR injector test kit

The FLAGMAN-FULL complex is intended for testing CommonRail injectors manufactured by Bosch, Denso, Delphi, Siemens VDO at the stand.

The measurement takes place in an 8-channel FLAGMAN-FLOW system without a beaker. There is a possibility of retrofitting with a hardware-software complex for coding injectors.

Computer control of the set through the CASCADE software.





FLAGMAN-CODE (FLAGMAN-CODE-L)

CR injector test kit

The FLAGMAN-CODE complex is designed to test common rail injectors manufactured by Bosch, Denso, Delphi, Siemens VDO at the stand.

The measurement takes place in the 8-channel FLAGMAN-FLOW system without beakers. The complex consists of a FLAGMAN-FLOW measuring unit and a CR-TESTER controller. CRT-5040. The complex is also equipped with a vacuum system for coding Deiphi C2i, C3i injectors. Computer control of the set through the CASCADE software.

The FLAGMAN-CODE-L kit is equipped with equipment for installing injectors on a test bench.

DL-CR50015

Sensor for coding



FLAGMAN-CODE

CR injector test kit

The FLAGMAN-FULL complex is designed for diagnosing CommonRail injectors manufactured by Bosch, Denso, Delphi, Siemens VDO at the stand.

The measurement takes place in an 8-channel beakerless FLAGMAN-FLOW system. The complex consists of a FLAGMAN-FLOW measuring unit and a CR-TESTER controller. CRT-5040. The complex is also equipped with a vacuum system for coding Deiphi C2i, C3i injectors. Computer control of the set through the CASCADE software.

Scope of delivery FLAGMAN-CODE



DL-CR50015

Sensor for coding

Measurement unit without beaker FLAGMAN-FLOW		
Controller CR-T	ESTER. CRT-5040	1 pc
Vacuum system	1	1 set
Software		1 pc
Passport (technical description, instruction manual)		
Set of connecting cables for FLAGMAN-FLOW measuring unit and CR-TESTER controller. CRT-5040		
Extension cord	for injector cables: "Injector" socket -1.5m	1 pc
Adapter cable f	or injectors	1 set
Adapter cable for high pressure regulators		
Adapter cable for low pressure regulators		
Adapter cable for pressure sensor		
Power cable 220 V		
Connectors for self-manufacturing of cables into sockets: "Protection", "TanktC", "RegtC", "Cycle", "Pump", "Invertor", "Rpm"		
Temperature sen	sor for monitoring the temperature of the liquid in the tank: "TanktC" socket	1 pc
Temperature se	ensors for measuring the temperature of the TJ backflow	4 pcs
Reed switch for	connecting a protective screen: "Protection" socket	1 pc
Fuse 3A		1 pc
Connecting pipe	elines	1 set
DL-CR50015	Injection start measuring sensor (for coding)	1 pc





FLAGMAN-CODE-L

CR injector test kit

The FLAGMAN-FULL complex is intended for testing common rail injectors manufactured by Bosch, Denso, Delphi, Siemens VDO at the stand.

The measurement takes place in an 8-channel beakerless FLAGMAN-FLOW system. The complex consists of a FLAGMAN-FLOW measuring unit and a CR-TESTER controller. CRT-5040. The complex is also equipped with a vacuum system for coding Deiphi C2i, C3i injectors. Computer control of the set through the CASCADE software.

Kit of delivery FLAGMAN-CODE-L



DL-CR50015

Sensor for coding

Measurement u	init without beaker FLAGMAN-FLOW	1 pc
Controller CR-TESTER. CRT-5040		
Vacuum system	1	1 set
Software		1 pc
Passport (techr	nical description, instruction manual)	1 pc
	ng cables for FLAGMAN-FLOW measuring unit R controller. CRT-5040	1 set
Extension cord	for injector cables: "Injector" socket -1.5m	1 pc
Adapter cable f	or injectors	1 set
Adapter cable f	or high pressure regulators	1 pc
Adapter cable for low pressure regulators		
Adapter cable for pressure sensor		
Power cable 22	0 V	1 pc
	self-manufacturing of cables into sockets: anktC", "RegtC", "Cycle", "Pump", "Invertor", "Rpm"	1 set
Temperature ser	nsor for monitoring the temperature of the liquid in the tank: "TanktC" socket	1 pc
Temperature se	ensors for measuring the temperature of the TJ backflow	4 pcs
Reed switch for connecting a protective screen: "Protection" socket		
Fuse 3A		
Connecting pipe	elines	1 set
DL-CR50015	Injection start measuring sensor (for coding)	1 pc
DL-CR10015	Nozzle holder frame	1 pc
DL-CR10025	Injector holder bracket assembly	1 pc
DL-CR10006	Protective glass (6mm) or DL-CR10010 Protective glass (10mm)	1 pc



CRISTINA

The **CRistina** complex is designed for assembling injectors of the COMMON RAIL BOSCH, DELPHI, DENSO systems using a technology that allows you to calculate and select all the necessary adjusting elements.

The software and hardware of the complex allows not only to accurately measure the required dimensions, but also to diagnose the state of the injector electromagnet with the measurement of the resistance and inductance of the winding.

The working program of the complex contains a detailed database of mounting dimensions of the most common COMMON RAIL injectors and a complete visualization of the assembly process, which allows you to avoid assembly errors and significantly reduce repair time.

To eliminate errors in measuring dimensions, the design of the CRistina complex allows you to accurately and rigidly base the nozzle body to eliminate the effects of vibration and uncontrolled movement of the measured element relative to the measuring device.

Equipment options:

- CRISTINA-BASE
- CRISTINA-BASE-F
- CRISTINA-FULL
- CRISTINA-PROF
- CRISTINA-PROF-FULL
- CRISTINA-SPECIAL









DL-UNI20150 CRISTINA - PIEZO

The device is designed to test piezo injectors and piezo package.

The device confidently determines all the faults of the piezo package. Identifies problems that similar instruments or stands do not detect. The device was developed for the assembly of Siemens injectors, but it is also efficient with BOSCH injectors.

Device capabilities:

- 1. Signal giving to activate the nozzle on the hand press
- 2. Measurement of the resistance of the piezo package
- 3. Breakdown test on the case
- 4. Measuring the capacity of the piezo package
- 5. Measurement of the smooth running of the piezo package

Contents of delivery:

- 1. Signal generator "CRistina-PIEZO"
- 2. A set of cables to the signal generator "CRistina-PIEZO"
- Power cable 220V
- Main cable for connecting to the piezo package
- Cable adapter universal
- Adapter cable with crocodile clips
- Earthing cable
- 3. Passport (technical description, operating instructions) 1 pc.

ATTENTION ! ADDITIONAL EQUIPMENT ARE POSSIBLE TOGETHER WITH THE DEVICE!





A_acoustic testing



DL-UNI20150A CRISTINA - PIEZO ACOUSTIC

The device is designed to test piezo injectors and piezo package.

The device confidently determines all the faults of the piezo package. Identifies problems that similar instruments or stands do not detect.

The device was developed for the assembly of Siemens injectors, but it is also efficient with BOSCH injectors.

Device capabilities:

- 1. Signal giving to activate the nozzle on the hand press
- 2. Measurement of the resistance of the piezo package
- 3. Breakdown test on the case
- 4. Measuring the capacity of the piezo package
- 5. Measurement of the smooth running of the piezo package
- 6. Valve opening/closing control with acoustic test
- 7. Precise detection of valve opening and closing with an acoustic test

Contents of delivery:

- 1. Signal generator "CRistina-PIEZO"
- 2. A set of cables to the signal generator "CRistina-PIEZO"
 - Power cable 220V
 - Main cable for connecting to the piezo package
 - Cable adapter universal
 - Adapter cable with crocodile clips
- Earthing cable
- 3. Microphone
- 4. Microphone holder
- 5. Passport (technical description, operating instructions) 1 pc.

ATTENTION ! ADDITIONAL EQUIPMENT ARE POSSIBLE TOGETHER WITH THE DEVICE!







DL-UNI20050 CRISTINA - PIEZO

The device is designed to test piezo injectors and piezo package.

The device confidently determines all the faults of the piezo package. Identifies problems that similar instruments or stands do not detect. The device was developed for the assembly of Siemens injectors, but it is also efficient with BOSCH injectors.





Device capabilities:

- 1. Signal giving to activate the nozzle on the hand press
- 2. Measurement of the resistance of the piezo package
- 3. Breakdown test on the case
- 4. Measuring the capacity of the piezo package
- 5. Measurement of the smooth running of the piezo package

Contents of delivery:

- 1. Controller CRistina-Piezo
- 2. The clamp-holder of injectors Piezo ST-04
- 3.Bracket holder.
- 4. The air meter.
- 5. The air filter.
- 6. The distributive air valve.
- 7. Reducer for air.
- 8. The electronic manometer.
- 9. Set of tubes.
- 10. Quick coupling 6mm.
- 11. Set of 2 nozzles for the backflow of the Siemens VDO injectors
- 12. **DL-CR50157** Set of adapters for measuring f the valve stroke of CR VDO Siemens injector
- (DL-CR50165 for DL-UNI20050-F)
- 13.Connector M12x1,5X1/8"

ATTENTION ! ADDITIONAL EQUIPMENT ARE POSSIBLE TOGETHER WITH THE DEVICE!

It differs from the **DL-UNI20050F** set in a less complete set of adapters for injectors.





DL-UNI20050F CRISTINA - PIEZO

The device is designed to test piezo injectors and piezo package.

The device confidently determines all the faults of the piezo package. Identifies problems that similar instruments or stands do not detect. The device was developed for the assembly of Siemens injectors, but it is also efficient with BOSCH injectors.







DL-CR50165

Device capabilities:

- 1. Signal giving to activate the nozzle on the hand press
- 2. Measurement of the resistance of the piezo package
- 3. Breakdown test on the case
- 4. Measuring the capacity of the piezo package
- 5. Measurement of the smooth running of the piezo package

Contents of delivery:

- 1. Controller CRistina-Piezo
- 2. Clamp-holder for injectors Piezo ST-04
- 3. Bracket holder for equipment.
- 4. Air meter.
- 5. Air filter.
- 6. Air distribution crane.
- 7. Reducer for air.
- 8. Electronic manometer.
- 9. Set of tubes.

340

- 10.Coupling of quick connection 6mm.
- 11.Set of 2 fittings for backflow of Siemens VDO injectors
- 12. **DL-CR50165** Set of adapters for measuring the stroke of the injector valve CR VDO Siemens 13. Adapter M12x1.5X 1/8 "

ATTENTION ! ADDITIONAL EQUIPMENT ARE POSSIBLE TOGETHER WITH THE DEVICE!

It differs from the **DL-UNI20050** kit in a more complete set of adapters for injectors.



_A_acoustic testing___



DL-UNI20050A CRISTINA - PIEZO ACOUSTIC

The device is designed to test piezo injectors and piezo package.

The device confidently determines all the faults of the piezo package. Identifies problems that similar instruments or stands do not detect. The device was developed for the assembly of Siemens injectors, but it is also efficient with BOSCH injectors.







DL-CR50157

Device capabilities:

- 1. Signal giving to activate the nozzle on the hand press
- 2. Measurement of the resistance of the piezo package
- 3. Breakdown test on the case
- 4. Measuring the capacity of the piezo package
- 5. Measurement of the smooth running of the piezo package
- 6. Valve opening / closing control with acoustic test

Contents of delivery:

- 1. Controller CRistina-Piezo
- 2. Clamp-holder for injectors Piezo ST-04
- 3. Bracket holder for equipment.
- 4. Air meter.
- 5. Air filter.
- 6. Air distribution crane.
- 7. Reducer for air.
- 8. Electronic manometer.
- 9. Set of tubes.
- 10. Coupling of quick connection 6mm.
- 11.Set of 2 fittings for backflow of Siemens VDO injectors
- 12. **DL-CR50157** Set of adapters for measuring the stroke of the valve injector CR VDO Siemens 13.Adapter M12x1.5X 1/8 "
- 14. Microphone
- 15. Microphone holder
- 16. Passport

ATTENTION ! ADDITIONAL EQUIPMENT ARE POSSIBLE TOGETHER WITH THE DEVICE!

It differs from the DL-UNI20050F (A) kit in a less complete set of adapters for injectors.



→/AL acoustic testing ____



DL-UNI20050FA CRISTINA - PIEZO ACOUSTIC

The device is designed to test piezo injectors and piezo package.

The device confidently determines all the faults of the piezo package. Identifies problems that similar instruments or stands do not detect. The device was developed for the assembly of Siemens injectors, but it is also efficient with BOSCH injectors.





DL-CR50165

Device capabilities:

- 1. Signal giving to activate the nozzle on the hand press
- 2. Measurement of the resistance of the piezo package
- 3. Breakdown test on the case
- 4. Measuring the capacity of the piezo package
- 5. Measurement of the smooth running of the piezo package
- 6. Valve opening / closing control with acoustic test

Contents of delivery:

- 1. Controller CRistina-Piezo
- 2. Clamp-holder for injectors Piezo ST-04
- 3. Bracket holder for equipment.
- 4. Air meter.
- 5. Air filter.
- 6. Air distribution crane.
- 7. Reducer for air.
- 8. Electronic manometer.
- 9. Set of tubes.
- 10. Coupling of quick connection 6mm.
- 11.Set of 2 fittings for backflow of Siemens VDO injectors
- 12. **DL-CR50165** Set of adapters for measuring the stroke of the injector valve CR VDO Siemens
- 13.Adapter M12x1.5X 1/8 "
- 14. Microphone
- 15. Microphone holder
- 16. Passport

ATTENTION ! ADDITIONAL EQUIPMENT ARE POSSIBLE TOGETHER WITH THE DEVICE!

Differs from DL-UNI20050 (A) kit in more complete set of injector adapters





DL-UNI20051 Комплект с CRistina-PIEZO

Repair kit for piezo injectors CR Siemens / VDO (without clamp for clamping injectors and acoustic test). The device confidently detects all malfunctions of the piezoelectric package. Identifies problems that similar instruments or benches do not detect.

The device was developed for assembling Siemens injectors, but it is also functional with Bosch injectors.





Device capabilities:

- 1. Signal giving to activate the nozzle on the hand press
- 2. Measurement of the resistance of the piezo package
- 3. Breakdown test on the case
- 4. Measuring the capacity of the piezo package
- 5. Measurement of the smooth running of the piezo package

Contents of delivery:

- 1. Controller CRistina-Piezo
- 2. Bracket holder for equipment.
- 3. Air meter.
- 4. Air filter.
- 5. Air distribution crane.
- 6. Reducer for air.
- 7. Electronic manometer.
- 8. Set of tubes.
- 9. Quick coupling 6mm.

10.Set of 2 fittings for backflow of Siemens VDO injectors

11.Adapter M12x1.5X 1/8 "

DL-UNI20051A CRistina-PIEZO kit with acoustic test

Repair kit for piezo injectors CR Siemens / VDO (without clamp for clamping injectors)

ATTENTION ! ADDITIONAL EQUIPMENT ARE POSSIBLE TOGETHER WITH THE DEVICE!



_//L_acoustic testing____



DL-UNI20051A Комплект с CRistina-PIEZO

Repair kit for piezo injectors CR Siemens / VDO (without clamp for clamping injectors with acoustic test). The device is designed to test the piezo injector of the piezo package. The device confidently detects all malfunctions of the piezoelectric package. Identifies problems that similar instruments or benches do not detect.

The device was developed for assembling Siemens injectors, but it is also functional with Bosch injectors.







Device capabilities:

- 1. Signal giving to activate the nozzle on the hand press
- 2. Measurement of the resistance of the piezo package
- 3. Breakdown test on the case
- 4. Measuring the capacity of the piezo package
- 5. Measurement of the smooth running of the piezo package
- 6. Valve opening / closing control with acoustic test

Contents of delivery:


- 1. Controller CRistina-Piezo
- 2. Bracket holder for equipment.
- 3. Air meter.
- 4. Air filter.
- 5. Air distribution crane.
- 6. Reducer for air.
- 7. Electronic manometer.
- 8. Set of tubes.
- 9. Quick coupling 6mm.
- 10. Set of 2 fittings for backflow of Siemens VDO injectors
- 11. Adapter M12x1.5X 1/8 "
- 12. Microphone
- 13. Microphone holder
- 14. Passport

344

ATTENTION ! ADDITIONAL EQUIPMENT ARE POSSIBLE TOGETHER WITH THE DEVICE!



ADDITIONAL EQUIPMENT FOR CRISTINA-PIEZO

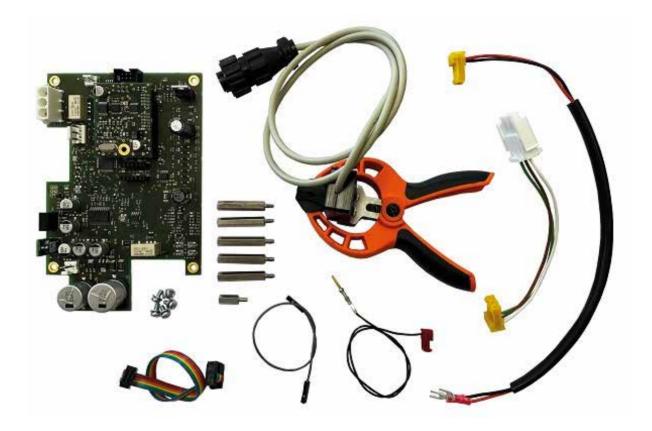

DL-UNI20054 ACOUSTIC BOARD

Acoustic test kit for CRISTINA - PIEZO

The kit includes:

- 1. Microphone in a plastic case
- 2. Clip for fixing the microphone on the nozzle body
- 3. Acoustic test board for installation inside the instrument CRISTINA -PIEZO
- 4. Set of connecting wires
- 5. Set of racks and bolts for fixing the board
- 6. Instructions for assembly.



ADDITIONAL EQUIPMENT FOR CRISTINA-PIEZO

DL-UNI20052

Injector repair kit

Kit features:

in the nozzle



Contents of delivery:

- 1. Clamp-holder of nozzles PiezoST-04
- 2. Equipment holder bracket.
- 3. Air meter.
- 4. Air filter.
- 5. Air distribution valve.
- 6. Reducer for air.
- 7. Electronic pressure gauge.
- 8. Set of tubes.
- 9.6mm quick coupling.

10. Set of 2 fittings (DL-60151/61 and DL-60151/66) for backflow of Siemens injectors

11. Adapter M12x1.5X 1/8"



DL-UNI20053

Injector repair kit CR Siemens VDO (without CRistina-Piezo controller and clamps ST04)

CR Siemens VDO (without CRistina-Piezo controller)

1. Reliable installation and fixation of nozzles

5. Convenient connection with fittings made of

3. Adjusting the air pressure with a reducer

2. Air supply with pressure valve

4. Air filtration from liquid residues

6. Valve opening/closing control with

delivery set to injector return

using a rotameter

Kit features:

- 1. Air supply with push valve
- 2. Adjustment of air pressure by a reducer
- 3. Air filtration from liquid residues in the nozzle
- 4. Convenient connection with fittings from the kit
- supplies to the return nozzle

5.Valve opening/closing control with rotameter

- Contents of delivery:
- Equipment holder bracket.
 Air meter.
- 3. Air filter.
- 4. Air distribution valve.
- 5. Reducer for air.
- 6. Electronic pressure gauge.
- 7. Set of tubes.
- 8. 6mm quick coupling.

9. A set of 2 fittings (DL-60151/61 and DL-60151/66) for backflow of Siemens injectors 10. Adapter M12x1.5X 1/8"



ADDITIONAL EQUIPMENT FOR CRISTINA-PIEZO



DL-CR50165

Set of adapters with indicator head for measuring the stroke of the CR VDO injector valve Siemens all types

Contents of delivery:

- 1. **DL-CR31079** Adapter for measuring the parameters of the piezo injector package of a new type M25x1
- 2. DL-CR31179 Adapter for measuring the parameters of the piezo injectors of the old type M27x1
- 3. DL-CR31080 Adapter housing for measuring the stroke of the injector valve
- 4. DL-CR31081 Nut to the body of the adapter for measuring the stroke of the injector valve of the new type M25x1 Nut to the body of the adapter for measuring the stroke of the injector valve of the new type M27x1
- 5. DL-CR31178
- 6. **D-7153136** Hex key 2mm 7. DL-KIP002
 - Indicator measuring head mechanical 0.001mm stroke 5mm

DL-CR50157

- 8. DL-CR31177 Measuring probe
- 9. Organizer



Contents of delivery:

- DL-CR31079 1. Adapter for testing the piezo package.
- 2. DL-CR50147 Adapter (body with nut) for measuring valve travel.
- 3. DL-KIP002 Indicator measuring mechanical head with an accuracy of 0.001 mm, stroke 5 mm

Set of adapters with indicator head for

- 4. **D-7153136**
- Hex key 2mm 5. DL-CR31177 Measuring probe
- 6. Organizer



DL-CR30545

Wrench for mounting / dismounting the multiplier nut **SIEMENS** injectors

measuring the parameters of the CR VDO Siemens injector.



DL-CR50163

Wrench 25mm for mounting/dismantling the piezo package of CR VDO Siemens injectors. Landing dimensions of the key: a) hexagon for piezo package 25mm b) 1/2" square for torque wrench



DL-CR50164

Wrench 27mm for mounting/dismantling the piezo package of CR VDO Siemens injectors. Landing dimensions of the key: a) hexagon for piezo package 27mm b) 1/2" square for torque wrench



dieselland.ru | dieselland.biz | dieselland@mail.ru

347



CR-ACTIVE

The **CR-Active** signal activator is designed to supply a control signal to the solenoid valve of Common-Rail injectors. It is used to measure the valve stroke when measuring the magnetic gap of electromagnetic Common-Rail injectors.



The base package includes:

- Signal generator "CR-ACTIVE" 1 pc.
- Power cable (2.1) 220V 1 pc.
- Main cable (2.2) for connection to the electromagnet 1 pc.
- Adapter cable (2.3) for light injector 1 pc.
- Adapter cable (2.4) for cargo injector 1 pc.
- Passport (technical description, operating instructions) 1 pc.



CR-ACTIVE

EQUIPMENT AND CHARACTERISTICS

The complete package includes:

- Signal generator "CR-ACTIVE" 1 pc.
- Power cable (2.1) 220V 1 pc.
- Main cable (2.2) for connection to the electromagnet 1 pc.
- Adapter cable (2.3) for light injector 1 pc.
- Adapter cable (2.4) for cargo injector 1 pc.
- Stand for injectors 1 pc.
- Set of measuring probes. 1 set
- Set of 4 adapters for measuring force parameters. 1 PC.
- Measuring indicator head 1 pc.
- Passport (technical description, operating instructions) 1 pc.

Main technical data and characteristics:

Supply voltage	~220 V ±15%
Power consumption	up to 150 W
Four levels of current control signal	
Control signal duration	1.5 sec
Number of operations per minute	no more than 12
Short circuit protection	
Activator dimensions (depth x width x height) mm	240x230x72
Device weight	net 4kg
Weight of the complete set	net 9kg



CR-NeXT

CR-NeXT - Armature activator device for Common-Rail injector solenoid valve

The CR-NeXT device is designed to supply a control signal to the solenoid valve of Common-Rail injectors. It is mainly used to measure the valve stroke when measuring the magnetic gap of common-rail solenoid injectors.



- CR-NeXT device 1 pc.
- Power cable 220 V 1 pc.
- Universal cable for connection to the injector 1 pc.
- Extension cable 1 pc
- Cable with crocodile clips 1 pc.





DL-RLC41R

Instrument for measuring capacitance of piezo packs nozzles.

- LRC Meter 41R
- Set of test leads
- Communication cable
- Software CD
- Battery











PUMP TEST.02

Common-Rail High Pressure Pump Testing Equipment



PUMP TEST .02

The kit includes:

1. The **PTC-2520** device is designed to provide user-programmable control signals to Common Rail injection pump pressure regulators to test their performance.

2. Device **FMDE-520**, designed to measure the performance of the Common Rail injection pump in two channels.

- 3. Tool rack on wheels for easy operation.
- 4. A set of adapter cables.
- 5. Liquid fine filters (2 pcs.)
- 6. Software.







	-	-		-	1
-	-				-

			(menter)		-
	And inter		(mainted		8-
	-		is included.		
					1





PTC-2520 CP TESTER

Device for testing and testing high-pressure fuel pumps of the Common Rail system with a set of cables.





FMDE-520

Device for testing the performance of fuel pumps of the Common Rail system of various manufacturers: Bosch, Delphi, Denso, Siemens, Cummins on a test bench.

It is a 2-channel liquid flow meter (pump supply and return discharge) in various modes, with digital information output to a backlit liquid crystal display.

-	- Bar		1		-		
-	desapartit.	+7	Print Land				
	(a.ania)(4/4)		Tax minted (in Fig.				
	Name of Street Street	ener.	home-rat (15	11.00			
	Arrest Infrared.	-	Real Second	-	1.		
	to artis (scend)	-	Tal Antima (School)	-			
					- dangang	- 2	





UIS-TESTER 2

The **UIS TESTER Multi-CAM** device is designed to test and verify the performance of unit injectors (UIS - Unit Injector System) and individual high pressure fuel pumps with high pressure solenoid valves (UPS - Unit Pump System).

Using the **UIS TESTER Multi-CAM** device, you can measure the response time of an electric valve, the device also has the ability to automatically control the electric drive of the measuring unit, and additional options for self-updating the firmware and adapting to various CAMBOX versions.

The UIS TESTER Multi-CAM device allows you to:

- Set high pressure solenoid valve control signal;
- Measure the rotational speed of the pressure cam drive shaft;
- Set the required number of cycles;
- Preset mode, for 5 solenoid valve control modes;
- Set any value of the solenoid valve actuation advance angle.



- Instrument UIS TESTER Multi-CAM;
- Software with BOSCH test plans;
- Speed sensor; power cable;
- Adapter cable for connecting the speed sensor;
- Adapter cable for connecting BOSCH injectors 1 type;
- Cable-adapter for connecting injectors BOSCH 2type;
- Adapter cable for connecting DELPHI injectors;
- Universal adapter cable for injectors;
- Limit switch (reed switch) for protective fencing at the stand;
- Connector for curtain control cable.







DL-UNI20001 PR-INDICATOR

Electronic pressure gauge for hand press (instead of regular). Thread for the sensor in the indicator leg M12x1.5.

Contents of delivery:

• Electronic pressure gauge with cable for 1500 bar pressure sensor – 1 pc.

• Charger for manometer accumulator – 1 pc.

NB! The pressure sensor is not included in the scope of delivery.

DL-UNI20002 PR-INDICATOR

Electronic pressure gauge with pressure sensor for 1500 bar for a hand press (instead of the regular one).

Contents of delivery:

- Electronic pressure gauge with cable for 1500 bar pressure sensor 1 pc.
- Charger for manometer accumulator 1 piece,
- Pressure sensor for 1500 bar 1 pc.





DL-RP410

(without pressure sensor)

DL-RP415 (with pressure sensor. 1500 bar)

Hand press RP 400 for injector testing with electronic pressure gauge

Contents of delivery:

- mechanical press 1 pc. connecting tube 2 pcs.
- electronic pressure gauge with cable 1 pc.
- battery charger 1 pc.
- pressure sensor (for **RP 415**) for 1500 bar 1 pc.

DL-RP510	(without pressure sensor)
DL-RP515	(with pressure sensor. 1500 bar)

ZECA hand press for injector testing with electronic pressure gauge

- mechanical press 1 pc. connecting tube 2 pcs.
- electronic pressure gauge with cable 1 pc.
- battery charger 1 pc.
- pressure sensor (for **RP 515**) for 1500 bar 1 pc.



ELECTRONIC DEVICES for diagnostics and repair of diesel fuel equipment





DL-UNI20065



Electronic pressure gauge complete with charger device. Electronic pressure gauge included with charger

DL-UNI20077

adapter cable for pressure sensor BOSCH 1500 bar



DL-UNI21030

mounting bracket electronic manometer



DL-UNI30237

Pressure gauge leg (fitting) G1/2 with nut M12 x 1.25 mm

Manometer leg (fitting) M20 x 1.5mm with nut M12 x 1.25 mm

DL-UNI30445



DL-CR10058 DL-CR10059 DL-CR10060

Pressure sensor 1500 bar

DL-UNI20065 PR-TESTER.V05

Electronic pressure gauge suitable for hand presses:



DL-RP420 (without pressure sensor)

DL-RP425 (with pressure sensor. 1500 bar)

Hand press RP 400 for injector testing with electronic pressure gauge DL-UNI20065

Contents of delivery:

- mechanical press 1 pc. connecting tube 2 pcs.
- electronic pressure gauge with cable 1 pc.
- battery charger 1 pc.
- pressure sensor (for RP 425) for 1500 bar 1 pc.

DL-RP520	(without pressure sensor)
DL-RP525	(with pressure sensor. 1500 bar)

ZECA hand press for injector testing with electronic pressure gauge DL-UNI20065

- mechanical press 1 pc. connecting tube 2 pcs.
- electronic pressure gauge with cable 1 pc.
- battery charger 1 pc.
- pressure sensor (for **RP 525**) for 1500 bar 1 pc.





PR-TESTER.V05

DL-UNI20061

ELECTRONIC DEVICES for diagnostics

7.

8.

Charger

The passport

and repair of diesel fuel equipment

Electronic pressure gauge 2 channel

Delivery set for measurement pressure on 2 CHANNELS:

1.	DL-UNI20065	Electronic pressure gauge
2.	DL-UNI20071	Main adapter cable for
		2-channel connection - 1 pc.
3.	DL-UNI20072	Adapter cable for pressure
		sensor BOSCH type 1 – 2 pcs.
4.	DL-UNI20073	Adapter cable for pressure
		sensor BOSCH 2 type – 2 pcs.
5.	DL-UNI20074	DELPHI pressure adapter
		cable – 2 pcs.
6.	DL-UNI20075	Adapter cable for universal
		for pressure sensor - 2 pcs.





PR-TESTER.V05	Electron
FR-1E31ER.V03	2 chann

Electronic pressure gauge 2 channel

DL-UNI20060 Delivery set for measurement pressure on 1 CHANNEL:

1.	DL-UNI20065	Electronic pressure gauge
2.	DL-UNI20070	Main adapter cable for single-channel connection – 1 pc.
3.	DL-UNI20072	Adapter cable for pressure sensor BOSCH type 1 – 1 pc.
4.	DL-UNI20073	BOSCH pressure sensor adapter cable 2 type – 1 pc.
5.	DL-UNI20074	DELPHI pressure adapter cable – 1 pc.
6.	DL-UNI20075	Universal adapter cable for pressure sensor - 1 pc.

- 7. Charger
- 8. The passport





PR-TESTER.V03

ELECTRONIC DEVICES for diagnostics

and repair of diesel fuel equipment

Instrument for measuring fuel pressure in CR systems, FSI and measurement of air pressure and vacuum in pneumatic systems.

Contents of delivery:

- Pressure measuring device 1 pc.
- DL-UNI20072 Sensor adapter cable pressure BOSCH 1 type - 1 pc.
- DL-UNI20075 Universal adapter cable
 - for pressure sensor 1 pc.
- Charger
- Passport / instruction manual / warranty card

Additional adapter cables (not included in the main set):

, main set).		
Adapter cable for pressure sensor		
BOSCH 2 type		
L-UNI20074 Adapter cable for pressure sense		
DELPHI		



DT-SCOPE

Oscilloscope attachment for measurement of the pressure value in the CommonRail system



ELECTRONIC DEVICES for diagnostics and repair of diesel fuel equipment



DL-UNI20009

CR test kit

Contents of delivery:

- Tee 1 pc.
- Pressure sensor 1 pc.
- HP tubes 2 pcs. (14x14x300, 12x14x300)
- Fittings 3 pcs. (14x14, 14x14, 12x14)
- Plugs 2 pcs. (14.12)

DL-CR50310KIT

Adapter assembly for diagnostics of the fuel system

		· J ·
•	DL-CR31557	Adapter housing - 1 pc.
•	DL-CR10056	Safety valve
		1800 bar - 1 piece
•	DL-CR10050	Pressure sensor 1800 bar - 1 pc.
•	DL-UNI30218	high pressure fitting
		M14 (1.5) x M14 (1.5) in a set with a washer -
		gasket DL-SHP15084 – 1 pc.
•	34-RL3106M5	L-shaped "fast"
		adapter - 1 pc
•	DL-P1002	PVC tube with a diameter of 4 mm - 30 cm









DL-UNI20006

CR test kit

Contents of delivery:

- PR-tester (electronic pressure gauge) 1 pc.
- Pressure sensor 1800 bar 1 pc.
- Connector-adapter for pressure sensor 1 pc.
- Tee (for connecting a pressure sensor and HP tubes) - 1 pc.
- Fittings 3 pieces (14x14, 14x14, 12x14)
- HP tubes 2 pieces (14x14x300, 12x14x300)
- Plugs 2 pieces (M14, M12)



DL-UNI20007

CR test kit

- PR-tester (electronic manometer) 1 pc.
- Pressure sensor 1800 bar 1 pc.
- Connector-adapter for pressure sensor 1 pc.
- Tee (for connecting the pressure sensor and HP tube) 1 pc.
- Fittings 3 pcs. (14x14, 14x14, 12x14)
- HP tubes 2 pcs. (14x14x300,12x14x300)
- Plugs 2 pcs. (M14, M12)
- DL-12CRM set Backflow test flask set
- DL-24CRM kit Backflow test adapter kit





DL-UNI30287

Adapter with internal thread G1/2" for pressure gauge at 2000 bar. Has a connection M14x1.5mm thread with 60° cone for tube high pressure (HPT)

Contents of delivery: adapter - 1 pc.



DL-UNI30508

Adapter with internal thread M20x1.5mm for pressure gauge at 2500 bar. Has a connecting M14x1.5mm thread with 60° cone for tube high pressure (HPT).

Contents of delivery: adapter - 1 pc.



DL-CR14P2000

Gasket for pressure gauge





DL-CR14P2500 Pressure gauge 2500 bar



DL-CR50246

Manometer mounting bracket. Made in the form of a hook and gauge holder brackets. Used with pressure gauges of the series D-12-TV63







DL-KM2000

Pressure gauge bracket for 2000bar. For rail DL-CR30181 and DL-CR30522

Contents of delivery:

- bracket
- clamping bar
- M6x60 bolt, nuts, washers 2 sets
- M6x45 bolt, washers 2 sets

DL-KM3000

Pressure gauge bracket 2000bar for installation on a stand plate.

Contents of delivery:

- bracket
- Profile bolt with nut, washer and grommet
- clamping bar
- M6X60mm bolt with nut, washer and grommet 2 sets

DL-KM2500

Pressure gauge bracket for 2500bar. For rail DL-CR30181 and DL-CR30522

Contents of delivery:

- main bracket
- pressure gauge mounting ring
- M6x45 bolt, washers 2 sets
- M6x30 bolt, washers 2 sets
- M6x10mm bolt 3 pcs.



DL-KM3500

Pressure gauge bracket 2500bar for installation on a stand plate

Contents of delivery:

main bracket

- pressure gauge mounting ring
- Profile bolt with nut, washer and grommet
- M6 x30mm bolt with washer and grommet 2 sets
- M6x10mm bolt 3 pcs.



Anti-vibration pressure gauges with glycerin D-12-TG63 and D-12TV63 series

















D-12-TG63-1-0

Pressure gauge for vacuum from–1-0 bar Ø63 back 1/4" flange type

D-12-TG63-1-3

Vacuum pressure gauge from–1-3bar Ø63 back 1/4" flange type

D-12-TG63-01

Manometer for 0÷1 bar, Ø63 back 1/4" flange type

D-12-TG63-02,5

Manometer for 0÷2.5 bar, Ø63 back 1/4" flange type

D-12-TG63-004

Manometer for 0÷4 bar, Ø63 back 1/4" flange type

D-12-TG63-006

Manometer for 0÷6 bar, Ø63 back 1/4" flange type

D-12-TG63-010

Manometer for 0÷10 bar, Ø63 back 1/4" flange type

D-12-TG63-016

Manometer for 0÷16 bar, Ø63 back 1/4" flange type

D-12-TG63-025

Manometer for 0÷25 bar, Ø63 back 1/4" flange type

D-12-TG63-040

Manometer for 0÷40 bar, Ø63 back 1/4" flange type

D-12-TG63-060

Manometer for 0÷60 bar, Ø63 back 1/4" flange type

Anti-vibration pressure gauges with glycerin D-12-TG63 and D-12TV63 series


















Vacuum gauge from –1-0bar Ø63 with fitting from below 1/4"

D-12-TV63-1-3

Vacuum pressure gauge from–1-3bar Ø63 with fitting from below 1/4"

D-12-TV63-01

Manometer for 0÷1 bar, Ø63 with fitting from below 1/4"

D-12-TV63-02,5

Manometer for 0÷2.5 bar, Ø63 with fitting from below 1/4"

D-12-TV63-004

Manometer for 0÷4 bar, Ø63 with fitting from below 1/4"

D-12-TV63-006

Manometer for 0÷6 bar, Ø63 with fitting from below 1/4"

D-12-TV63-010

Manometer for 0÷10 bar, Ø63 with fitting from below 1/4"

D-12-TV63-016

Manometer for 0÷16 bar, Ø63 with fitting from below 1/4"

D-12-TV63-025

Manometer for 0÷25 bar, Ø63 with fitting from below 1/4"

D-12-TV63-040

Manometer for 0÷40 bar, Ø63 with fitting from below 1/4"

D-12-TV63-060

Manometer for 0÷60 bar, Ø63 with fitting from below 1/4"



364

Anti-vibration pressure gauges with glycerin of the D-12-TG100 and D-12TV100 series





D-12-TG100-1-0

Vacuum gauge, Ø100 mm with connector at the back -1 to 0 bar / -0.10 to 0 MPa

D-12-TG100-02,5

Pressure gauge, Ø100 mm with 1/2" rear connection 0 to 2.5 bar / 0 to 0.25 MPa

D-12-TG100-004

Pressure gauge, Ø100 mm with 1/2" rear connection 0 to 4 bar / 0 to 0.4 MPa

D-12-TG100-016

Pressure gauge, Ø100 mm with 1/2" rear connection 0 to 16 bar / 0 to 1.6 MPa

D-12-TG100-040

Pressure gauge, Ø100 mm with 1/2" rear connection 0 to 40 bar / 0 to 4 MPa

D-12-TV100-1-0

Vacuum gauge, Ø100 mm with bottom fitting 1/2" -1 to 0 bar / -0.10 to 0 MPa

D-12-TV100-02,5

Pressure gauge, Ø100 mm with 1/2" bottom connection 0 to 2.5 bar / 0 to 0.25 MPa

D-12-TV100-004

Pressure gauge, Ø100 mm with 1/2" bottom connection 0 to 4 bar / 0 to 0.4 MPa

D-12-TV100-016

Pressure gauge, Ø100 mm with 1/2" bottom connection 0 to 16 bar / 0 to 1.6 MPa

D-12-TV100-040

Pressure gauge, Ø100 mm with 1/2" bottom connection 0 to 40 bar / 0 to 4 MPa







Control and measuring tool and instrumentation



DL-KIP0001

Mechanical dial gauge Characteristics :

- Type mechanical
- Stroke 10mm
- Resolution 0.01 mm
- Repeatability 0.01 mm



DL-KIP0002

Mechanical dial gauge Characteristics :

- Type mechanical
- Stroke 5 mm
- Resolution 0.001 mm
- Repeatability 0.001 mm



DL-KIP0003

Mechanical dial gauge Characteristics :

- Type mechanical
- Stroke 5 mm
- Resolution 0.01 mm
- Repeatability 0.02 mm



DL-KIP0004

Mechanical dial gauge Characteristics :

- Type mechanical
- Stroke 10 mm
- Resolution 0.01 mm
- Repeatability 0.02 mm



366

DL-KIP0005

Mechanical dial gauge Characteristics :

- Type mechanical
- Stroke 20 mm
- Resolution 0.01 mm
- Repeatability 0.03 mm



Control and measuring tool and instrumentation



DL-KIP0006

Mechanical dial gauge Characteristics :

- Type mechanical
- Stroke 30mm
- Resolution 0.01 mm
- Repeatability 0.03 mm



DL-KIP0007

Mechanical dial gauge Characteristics :

- Type mechanical
- Stroke 50 mm
- Resolution 0.01 mm
- Repeatability 0.04 mm



DL-KIP0008

Indicator measuring head Characteristics :

- Type mechanical
- Stroke 25 mm
- Resolution 0.01 mm
- Repeatability 0.02 mm



DL-KIP0010

Indicator measuring head Characteristics :

- Type electronic
- Stroke 12.7mm
- Resolution 0.01 mm
- Repeatability 0.01 mm
- Sleeve 8 mmAutomatic shutdown



DL-KIP0011

Indicator measuring head Characteristics :

- Type electronic
- Stroke 12.7mm
- Resolution 0.001 mm
- Repeatability 0.004 mm
- Sleeve 8 mm
- Automatic shutdown



Control and measuring tool and instrumentation



DL-KIP0012

Indicator measuring head Characteristics :

- Type electronic
- Stroke 25 mm
- Resolution 0.001 mm
- Repeatability 0.004 mm
- Sleeve 8 mm
- Automatic shutdown

DL-KIP0015 Limit

Indicator measuring head Characteristics :

- Type electronic
- Stroke 12.5 mm
- Resolution 0.01 mm
- Repeatability 0.03 mm
- Sleeve 8 mm
- Automatic shutdown

DL-KIP0016 Limit


Indicator measuring head Characteristics :

- Type electronic
- Stroke 12.5 mm
- Resolution 0.001 mm
- Repeatability 0.004 mm
- Sleeve 8 mm
- Automatic shutdown



Indicator measuring head

- Characteristics :
- Type electronic
- Stroke 12.7mm
- Resolution 0.01 mm
- Repeatability 0.01 mm
- Sleeve 8 mm
- Automatic shutdown



Indicator measuring head Characteristics :

- Type electronic
- Stroke 12.7mm
- Resolution 0.001 mm
- Repeatability 0.002 mm
- Sleeve 8 mm
- Automatic shutdown









Control and measuring tool and instrumentation





Dieselland



DL-KIP0029 SHAHE

Indicator measuring head

- Characteristics :
- Type electronic
- Stroke 12.7mm
- Resolution 0.001 mm
 Dependently: 0.002 mm
- Repeatability 0.002 mm
- Sleeve 8 mm
- Automatic shutdown
- Communication with a PC using a COM port (cable included)





DL-KIP030 SHAHE

Indicator measuring head Characteristics :

- Type electronic
- Stroke 12.7mm
- Resolution 0.001 mmRepeatability 0.002 mm
- Sleeve 8 mm
- Automatic shutdown

DL-KIP0031

SHAHE

Indicator measuring head Characteristics :

- Type electronic
- Stroke 25 mm
- Resolution 0.001 mm
- Repeatability 0.004 mm
- Sleeve 8 mm
- Automatic shutdown



DL-KIP0032 Eee

Indicator measuring head Characteristics :

- Type electronic
- Stroke 50 mm
- Resolution 0.001 mm
- Repeatability 0.005 mm
- Sleeve 8 mm
- Automatic shutdown





DL-KIP0034

Indicator digital measuring head with an accuracy of 0.01 mm, stroke 12.5 mm Characteristics :

- Type electronic
- Resolution 0.01mm
- Accuracy 0.01mm
- Large, high contrast LCD display
- Carbide tip, thread M2.5
- Sleeve 8mm
- Automatic shutdown
- Case Ø 60mm

DL-KIP0035

Indicator digital measuring head with an accuracy of 0.001 mm, stroke 12.5 mm Characteristics :

- Type electronic
- Measuring range 12.7mm
- Resolution 0.001mm
- Accuracy 0.002mm
- Large, high contrast LCD display
- Carbide tip, thread M2.5
- Sleeve 8mm
- Automatic shutdown
- Case Ø 60mm

DL-KIP0036

Indicator digital measuring head with an accuracy of 0.001 mm, stroke 25mm Characteristics :

- Type electronic
- Measuring range 25.4mm
- Resolution 0.001mm
- Accuracy 0.004mm
- Large, high contrast LCD display
- Carbide tip, thread M2.5
- Sleeve 8mm
- Automatic shutdown
- Case Ø 60mm



DL-KIP0037

Digital thickness gauge 0-12.7 mm, 0.001 mm Characteristics :

- Measuring range 0-12.7 mm
- Resolution 0.001 mm
- LCD display
- Automatic shutdown
- Case Ø 57 mm







DL-KIP0250

Magnetic stand for mounting indicator measuring head

The stand base has high magnetic properties, which allows installation both on horizontal as well as vertical surfaces.

ATTENTION!

The measuring head is not included in the scope of delivery!



DL-KIP0251

372

Magnetic stand for mounting indicator measuring head

The stand base has high magnetic properties, which allows installation both on horizontal as well as vertical surfaces.

ATTENTION!

The measuring head is not included in the scope of delivery!





DL-STC150 digital caliper



DL-M030

(limited quantity) Digital micrometer

Measuring range 0-25mm Measurement accuracy 0.001mm



DL-M035

Digital micrometer

Measuring range 0-25mm Measurement accuracy 0.001mm



DL-M040

D-SDM tripod for digital micrometer



D-DMTS-KIT

(limited quantity) Kit DL-030 with DL-040. Tripod and digital micrometer





TESTER. VI

 \mathbf{e}

DL-UNI50062

Measurement adapter compression in diesel engines (M12x1.5; stem L=175 mm).

Installed in place of the injector. *The pressure sensor is not included.*

DL-UNI20008

Compression test kit in diesel engines.

Kit includes:

- adapter DL-UNI50062 1 pc.
- Pr-tester 1pc;
- cable for pressure sensor 1 pc.

The pressure sensor is not included.

*Appearance and scope of delivery subject to change to improve equipment performance

DL-UNI20000

Compression test kit in diesel engines.

Kit includes:

- adapter DL-UNI50062 1 pc.
- Pr-tester 1pc;
- cable for pressure sensor 1 pc.
- pressure sensor up to 1500 bar



DL-WT04A3021

Fuel pressure measuring kit in the low pressure line in diesel and gasoline engines.

Measuring range 0-140 psi (0-10 bar)



374



D-07147122

Torque wrench 1/2" 25-100 Nm



D-07147121 Torque wrench 3/8"



D-07147120

Torque wrench 1/4" 0-20 Nm



DL-UNI30776 Adapter with 1/4" internal square and outer square 1/2"



DL-UNI31593

Adapter with vnutr. 3/8" square and outer square 1/2"





DL-RP400

Manual press for injector testing with mechanical pressure gauge

Contents of delivery:

- mechanical press 1 pc.
- mechanical pressure gauge 1 pc.
- connecting tube 2 pcs.



DL-RP410	(without pressure sensor)
DL-RP415	(with pressure sensor. 1500 bar)

Manual press for injector testing with electronic pressure gauge

Contents of delivery:

- mechanical press 1 pc.
- connecting tube 2 pcs.
- electronic pressure gauge with cable 1 pc.
- battery charger 1 pc.
- pressure sensor (for **RP 415**) for 1500 bar 1 pc.

DL-RP420	(without pressure sensor)
DL-RP425	(with pressure sensor. 1500 bar)

Manual press for injector testing with 2-channel electronic pressure gauge

Contents of delivery:

- mechanical press 1 pc.
- connecting tube 2 pcs.
- electronic pressure gauge with cable 1 pc.
- battery charger 1 pc.
- pressure sensor (for **RP 425**) for 1500 bar 1 pc.



DL-RP430

Manufacturer - ZECA (Italy) Flame test chamber (aspirator) nozzle spray Allows for visual inspection performance of diesel injectors without harm to health. The device is going to work liquid for reuse.



dieselland.ru | dieselland.biz | dieselland@mail.ru



DL-RP500

Manufacturer - ZECA (Italy) Manual press for injector testing with mechanical pressure gauge

Contents of delivery:

- mechanical press 1 pc.
- mechanical pressure gauge 1 pc.
- connecting tube 2 pcs.



DL-RP510	(without pressure sensor)
----------	---------------------------

DL-RP515 (with pressure sensor. 1500 bar)

ZECA hand press for injector testing with electronic pressure gauge

Contents of delivery:

- mechanical press 1 pc.
- connecting tube 2 pcs.
- electronic pressure gauge with cable 1 pc.
- battery charger 1 pc.
- pressure sensor (for **RP 515**) for 1500 bar 1 pc.



DL-RP520	(without pressure sensor)
DL-RP525	(with pressure sensor. 1500 bar)

ZECA hand press for injector testing

with 2-channel electronic pressure gauge

Contents of delivery:

- mechanical press 1 pc.
- connecting tube 2 pcs.
- electronic pressure gauge with cable 1 pc.
- battery charger 1 pc.
- pressure sensor (for **RP 525**) for 1500 bar 1 pc.





DL-CRN50113

Set of goniometers to control the tightening of the atomizer nut

Contents of delivery:







DL-CRN50107

Protractor for injectors with nut diameter atomizer 17 mm

Angle range: 0° - 360°

DL-CRN50110

Protractor for injectors with diameter atomizer nuts 19 mm

Angle range: 0° - 360°

DL-CRN50108

Protractor for injectors with diameter atomizer nuts 21 mm

Angle range: 0° - 360°



All goniometers are for sale also separately.







DL-UNF20113

Liquid fine filter with 3 μm housing for stands TRIUMF, CR-TEST, SPF, CR-JET , SPN(U), DORPAT

DL-UNF20103

3 micron liquid fine filter for stands TRIUMF, CR-TEST, SPF, CR-JET , SPN(U), DORPAT



DL-UNF20105

5 micron liquid fine filter for stands TRIUMF, CR-TEST, SPF, CR-JET , SPN(U), DORPAT



DL-UNF20110

10 micron liquid fine filter for stands TRIUMF, CR-TEST, SPF, CR-JET, SPN(U), DORPAT



DL-UNF20210

Liquid fine filter (long body) 10 μm for DORPAT stands

DL-UNI50214

Housing for filters DL-UNF20113, DL-UNF20110, DL-UNF20103, DL-UNF20210. Has inlet and outlet with $G_{4^{''}}$ threads.









equinment for diesel

DL-UNF20124

3 micron liquid fine filter for stands CRUIS, CR-JAS, CR-iXE

DL-UNI50215

Housing for filter DL-UNF20124. Has inlet and outlet with $G^{1/2}$ " threads.

DL-UNF24020

Liquid filter for stand TRIUMF, CRUIS, CR-JET (draining from the desktop)






DL-UNF20300R

Filter - sump (entrance on the right) The filter contains:

Holes for entry and exit M14x1.5mm
 Mounting holes Ø 8mm



DL-UNF20300L

Filter - sump (entrance on the left) The filter contains:

Holes for entry and exit M14x1.5mm
 Mounting holes Ø 8mm



DL-CR30051

15 micron liquid filter with 1/8" outlets




DL-UNI50126

15 micron liquid filter with 3/8" outlets



DL-UNI50047

15 micron liquid filter with fittings (herringbone) 10 mm



DL-SDF0410

Mesh 15 µm for filters DL-UNI5026, DL-UNI50047, DL-CR30051







DL-UNI30828

Переходник с фильтром Bosch высокого давления для проверки насосов CP1, CP2 ,CP3 ,CP4. Используется с накопителями давления (рейлом) DL-CR31083, DL-CR30181 и DL-CR30522. Устанавливается в любое удобное место рейла.

В переходнике имеются резьбовые отверстия :

- для фильтра под специальный штуцер M18x1,5 (1 отв.)
- для подачи жидкости M14x1,5 (2 отв.сверху)
- для подсоединения датчика давления M18x1,5 (1 отв.)
- для подсоединения предохранительного клапана M20x1,5 (1 отв)
- для сброса давления в случае его превышения М5 (1 отв)

Комплект поставки:

- 1. переходник 1 шт.
- 2. фильтр DL-UNF21100 высокого давления 1 шт.
- конусный штуцер для фильтра высокого давления M14xM18 – 1 шт.
- 4. штуцер M14x1,5 2 шт.
- 5. уплотнительная шайба 3 шт.
- 6. заглушка M14x1,5 1 шт.
- 7. фитинг Ø 6мм хМ5.



DL-CR50121

Переходник под фильтр высокого давления DL-UNF21100 Монтируется вместо обычного штуцера в накопитель давления (Rail) DL-CR30479, DL-CR30180, DL-CR30181, DL-CR30188, DL-CR30522, DL-CR30526.

Комплект поставки: переходник – 1 шт., корпус переходника с резьбой М14х1,5 – 1шт.

ВНИМАНИЕ!

Фильтр высокого давления DL-UNF21100 в комплект поставки не входит и заказывается отдельно!



DL-UNF21100

Фильтр высокого давления для накопителей давления (Rail) DL-CR30479,DL-CR30180, DL-CR30181,DL-CR30188, DL-CR30522,DL-CR30526 Применяется также с переходником DL-CR50121





DL-SRS020

Calibration fluid SRS

ISO 4113-CV-AW (VS 15665-OL-CV), canister 20 liters.

Used in test benches for testing of CR injectors, unit injectors PLD sections.

Produced in Germany.



DL-SRS200

Calibration fluid SRS

ISO 4113-CV-AW (VS 15665-OL-CV), Barrel 200 liters.

Used in test benches for testing of CR injectors, unit injectors PLD sections.

Produced in Germany.







DL-PLP125

Plafond lighting for stands TRIUMF / CRUIS / CR-Test / DORPAT / CR-Jet

Specifications:

Overall dimension	145x145 mm
Mounting hole size	125x125 mm
Power	9 W
Voltage	24 V

Supplied complete with power supply.

DL-PLP135

Plafond lighting for stands TRIUMF / CRUIS / CR-Test / DORPAT / CR-Jet

Specifications:

Overall dimension	145x145 mm
Mounting hole size	135x135 mm
Power	9 W
Voltage	24 V

Supplied complete with power supply.



Fittings for connecting hydraulic and pneumatic systems

34-RL3104M5	Angle adapter M5 x Ø 4mm with collet
34-RL3106M5	Angle adapter M5 x Ø 6mm with collet
34-RL310401	Angle adapter 1/8" x Ø 4mm with collet
34-RL310601	Angle adapter 1/8" x Ø 6mm with collet
34-RL310801	Angle adapter 1/8" x Ø 8mm with collet
34-RL310602	Angle adapter 1/4" x Ø 6mm with collet
34-RL310802	Angle adapter 1/4" x Ø 8mm with collet
34-RL311002	Angle adapter 1/4" x Ø 10mm with collet
34-RL310803	Angle adapter 3/8" x Ø 8mm with collet
34-RL311003	Angle adapter 3/8" x Ø 10mm with collet

34-RL020402	Adapter with internal thread $1/4" \times 0$ 4mm with collet
34-RL020602	Adapter with internal thread 1/4" x Ø 6mm with collet
34-RL020401	Adapter with internal thread 1/8" x Ø 4mm with collet
34-RL020601	Adapter with internal thread 1/8" x Ø 6mm with collet

Adapter-coupling collet with M13x1mm thread and 2 nuts Ø6 x Ø 6mm

Adapter-coupling collet with M14x1mm thread and 2 nuts Ø6 x Ø 6mm

Adapter-coupling collet with M15x1mm thread and 2 nuts Ø6 x Ø 6mm

Adapter-coupling collet with M10x1mm thread and 2 nuts Ø4 x Ø 4mm

Adapter-coupling collet with M16x1mm thread and 2 nuts Ø8 x Ø 8mm

Adapter-coupling collet with M18x1mm thread and 2 nuts \emptyset 10 x \emptyset 10mm









384

34-RL0306

34-RL0306C

34-RL0306E

34-RL0304C

34-RL0308C

34-RL0310C

Fittings for connecting hydraulic and pneumatic systems

34-RL01004M5	Straight adapter M5 x Ø 4mm with collet
34-RL01006M5	Straight adapter M5 x Ø 6mm with collet
34-RL020401	Adapter straight 1/8" x Ø 4mm with collet
34-RL020601	Adapter straight 1/8" x Ø 6mm with collet
34-RL010801	Adapter straight 1/8" x Ø 8mm with collet
34-RL020602	Adapter straight 1/4" x Ø 6mm with collet
34-RL010802	Adapter straight 1/4" x Ø 8mm with collet
34-RL011002	Adapter straight 1/4" x Ø 10mm with collet
34-RL010803	Adapter straight 3/8" x Ø 8mm with collet
34-RL011003	Adapter straight 3/8" x Ø 10mm with collet

34-RL0306B	Adapter-coupling collet Ø 6 x Ø 6mm
34-RL0304B	Adapter-coupling collet Ø 4 x Ø 4mm
34-RL0308B	Adapter-coupling collet Ø 8 x Ø 8mm
34-RL0310B	Adapter-coupling collet Ø 10 x Ø 10mm



34-RL0406	
34-RL0408	

Elbow fitting with collet clamp Ø 6mm Elbow fitting with collet clamp Ø 8mm



34-RL0504	Tee adapter Ø 4 x Ø 4 x Ø 4mm with collet
34-RL0506	Tee adapter Ø 6 x Ø 6 x Ø 6mm with collet
34-RL0508	Tee adapter Ø 8 x Ø 8 x Ø 8mm with collet
34-RL0510	Tee adapter Ø 10 x Ø 10 x Ø 10mm with collet



Fittings for connecting hydraulic and pneumatic systems



DL-MOK

Coupling adapter with check valve \emptyset 6 x \emptyset 6mm with collet



34-MC15-06-06

Coupling adapter with union nuts and 2 clamping nuts nuts with M10 x 1mm thread for tube $Ø6 \times Ø6mm$



34-MO15-06-06

Coupling adapter with union nuts and 2 clamping nuts nuts with M10 x 1mm thread for tube \emptyset 6 x \emptyset 6mm (complete with 2 sleeves)



25-FPKM-04

Hydraulic quick connector "daddy" 1/4"



25-FPKF-04

Hydraulic quick connector "mother" 1/4"





Banjo fittings for hydraulic and pneumatic connections



DL-CR20062

Kit (banjo fitting 12mm + M12 bolt + rubber-metal washers) for hose 8mm (zinc)



DL-CR20064

Kit (14mm banjo fitting, M14 bolt, rubber-metal washers) for hose 8mm (zinc)

Bolts with zinc coating:

22-HS-06	banjo bolt hydraulic M12x1.5mm
22-HS-08	Hydraulic banjo bolt M14x1.5mm
22-HS-10	Hydraulic banjo bolt M16x1.5mm
22-HS-13	Hydraulic banjo bolt M18x1.5mm
22-HZ-08	Banjo bolt hydraulic 1/4"
22-HZ-10	Banjo bolt hydraulic 3/8"
570RLP-08	-08 Hydraulic banjo bolt 1/2"

Oxidized (black) coated bolt fittings:

	٣
	1
	1
	NW I

DL-UNI30908	Fitting banjo-bolt M16x1.5mm
DL-UNI30364	Fitting banjo-bolt 1/4"
DL-UNI30363	Fitting banjo bolt 3/8"
DL-UNI30350	Fitting 1/2" banjo bolt

Banjo fittings with galvanized coating:

22-RSN-06	Banjo fitting Ø12mm herringbone 8mm
22-RSN-08-06	Banjo fitting Ø14mm herringbone 8mm
22-RSN-08	Banjo fitting Ø14mm herringbone 10mm
22-RSN-10	Banjo fitting Ø16mm herringbone 11-12mm
22-RSN-13	Banjo fitting Ø18mm herringbone 13-14mm



Adjusting washers for Common-Rail injectors BOSCH





















DL08CR-220 Bosch

WASHER KIT DFK type CRI ,CRIN Ø= 3.5X5.3mm, H=1.20-1.70mm, Pitch=0.02mm, 24 sizes x 10 = 240 pcs

DL08CR5-244 Bosch

WASHER KIT DFK type CRI ,CRIN Ø= 3.5X5.3mm, H=1.20-1.70mm, Pitch=0.05mm, 11 sizes x 10 = 110 pcs

DL09CR-219 Bosch

WASHER KIT Ø= 10.5 X 15.7 mm, H=1.20-1.30mm, Pitch=0.01mm, 11 sizes x 10 = 110 pcs

DL10CR-235 Bosch

WASHER KIT AHE type CRIN1 Ø= 19Es 22mm, H=1.00-1.10mm, Pitch=0.01mm 11 sizes x 10 = 110 pcs

DL11CR-236 Bosch

WASHER KIT RLS type CRI-1 CRI-2.0 CRI-2.2, AHE type CRI-2.1 Ø= 19 X23.7mm, H=1.00-1.10mm, Pitch=0.01mm 11 sizes x 10 = 110 pcs



Adjusting washers for Common-Rail injectors BOSCH

0





1.28 1.22 1.24 1.26 1.28 1.30 1.32

1.34 1.36 1.38 1.40 1.42 1.44 1.48



100

1,46 1.50 1,52 1,56 1,60 1,64 1,64 1,64 1,54 1,54



128 1.25 1.38 1.35 1.46 1.45 1.89 1.55 1.58 1.65 1.70



DL12CR-230 Bosch

WASHER KIT VFK type CRI Ø= 2.5X4.5mm, H=1.20-1.70mm, Pitch=0.02mm 26 sizes x 10 = 260 pcs

DL12CR5-245 Bosch

WASHER KIT VFK type CRI Ø= 2.5X4.5mm, H=1.20-1.70mm, Pitch=0.05mm 11 sizes x 10 = 110 pcs

DL14CR-228 Bosch

WASHER KIT VFK type CRIN Ø= 2.3X4.2mm, H=1.20-1.70mm, Pitch=0.02mm 24 sizes x 10 = 240 pcs


DL14CR5-243 Bosch

WASHER KIT VFK type CRIN Ø= 2.3X4.2mm, H=1.20-1.70mm, Pitch=0.05mm 11 sizes x 10 = 110 pcs

DL16CR-232 Bosch

WASHER KIT DNH type CRI,CRIN Ø= 2.25mm, H=1.14-1.25mm, Pitch=0.01mm 12 sizes x 10 = 120 pcs















\bigcirc



1,00 1,01 1,02 1,03 1,04 1,05 1,06 1,07 1,08 1,09 1,10 1,01 1,02 1,08 1,09 1,10 1,02 1,08 1,09 1,10 1 1,05 1,08 1,09 1,10 1 1,05 1,08 1,09 1,10 1 1,05 1,08 1,09 1,10 1

DL17CR-269 Bosch

WASHER KIT DFK type CRI ,CRIN Ø= 3.5X5.3mm, H=0.90-1.90mm, Pitch=0.05mm 21 size x 10 = 210 pcs

DL18CR-271 Bosch

WASHER KIT CRI-1 CRI-2.0 CRI-2.2, AHE type CRI-2.1 Ø= 19 X23.7mm, H=0.90-1.00mm, Pitch=0.01mm 11 sizes x 10 = 110 pcs

DL19CR-273 Bosch

WASHER KIT RLS type CRIN-1 Ø= 19 Es 22mm, H=0.90-1.00mm, Pitch=0.01mm 11 sizes x 10 = 110 pcs

DL24CR-301 Bosch

WASHER KIT RLS type CRIN-1 Ø= 19Es 22mm, H=1.30-1.40mm, Pitch=0.01mm 11 sizes x 10 = 110 pcs

DL25CR-288 Bosch

WASHER KIT AHE type CRIN1 Ø= 18 Es 22mm, H=1.00-1.10mm, Pitch=0.01mm 11 sizes x 10 = 110 pcs







1.34 1.36 1.38 1.40 1.42 1.48 1.48

 1.48
 1.30
 1.52
 1.54
 1.58
 1.58
 1.60

 1.82
 1.64
 1.66
 1.68
 1.79
 1.72
 1.74

B1 20




1,29	1,21	1,22	1,33	1,24	1,25
1.25	1.27	1,28	1,29	1,30	
	Mars.				













DL26CR-283 Bosch

WASHER KIT DNH type CRI,CRIN Ø= 2.3 mm, H=0.95-1.13mm, Pitch=0.01mm 19 sizes x 10 = 190 pcs

DL28CR-287 Bosch

WASHER KIT AHE,RLS type CRIN2, CRIN3 Ø= 19.5 X 22.8mm, H=1.34-1.76mm, Pitch=0.02mm 22 sizes x 10 = 220 pcs

DL180CR-180 Bosch

WASHER KIT Ø= 19 Es22 mm, H=1.20-1.30mm, Pitch = 0.01mm 11 sizes x 10 = 110 pcs

DL77CR-77 Bosch

WASHER KIT DFK type CRI ,CRIN Ø= 3.5x 5.3mm, H=1.04-1.44mm, Pitch=0.02mm 21 size x 10 = 210 pcs

DL376CR-376 Bosch

WASHER KIT RLS type CRI ,CRIN Ø= 2.5x 6.4mm, H=1.00-1.20mm, Pitch=0.01mm 21 size x 10 = 210 pcs























DL88CR-88 Bosch

WASHER KIT DFK type CRI, CRIN Ø= 3.5x 5.3mm, H=1.46-1.86mm, Pitch=0.02mm

21 size x 10 = 210 pcs

DL99CR-99 Bosch

WASHER KIT AHE type CRI-1, CRI2.0, CRI2.2 Ø= 10.5 x 15.7mm, H=1.12-1.23mm, Pitch=0.01mm 12 sizes x 10 = 120 pcs

DL120CR-120 Bosch

WASHER KIT VFK CRIN Ø= 2.5 x 4.5 mm, H=1.70-1.90mm, Pitch=0.02mm 11 sizes x 10 = 110 pcs

DL20CR-272 Bosch

WASHER KIT VFK CRI Ø= 2.40 x 5.30mm, H=1.72-1.90mm, Pitch=0.02mm 10 sizes x 10 = 100 pcs

DL377CR-377 Bosch

WASHER KIT RLS type CRI ,CRIN Ø= 2.5x 6.4mm, H=1.21-1.40mm, Pitch=0.01mm 20 size x 10 = 200 pcs





1.04	1,05	1.08	1,10	1,12	1,14	1,18
1,18	1,20	1,22	1,24	1,25	1,28	1,30
1.32	1,34	1.36	1.38	1,40	1.42	1,44
-	1	1.40	1.00		1	
	-	8		- 63	1	
1	1	and and a	唐			100
1	隐	H	2		P	195
		11-	11-		1	-

DL22CR-222 Bosch

WASHER KIT Ø= 4.4x 7.7mm, H=0.98-1.44mm, Pitch=0.02mm 24 size x 10 = 240 pcs

Adjusting washers for CR DENSO injectors



1.10	1,15	1,28	1.25	1.38	1.35	1,48
1.45	1.50	1.05	1.60	1.65	1,70	1,75
1,88	1,85	1,00	1,05	2,00		
-	-				-	1000
			-			
22		圓圓				副副





DL130CR-130 Denso

WASHER KIT DENSO VFK Ø= 3.0 x 5.75mm, H=1.10-2.00mm, Pitch=0.05mm 19 sizes x 10 = 190 pcs

DL78CR-78 Denso

WASHER KIT DENSO VFK Ø= 3.0 x 6.75mm H=1.75-2.30mm, Pitch=0.05mm 12 sizes x 10 = 120 pcs

DL55CR-344 Denso

WASHER KIT DENSO VFK Ø= 24.3 mm x21.5 mm, H=1.50-1.72mm, Pitch=0.01mm 23 size x 10 = 230 pcs

DL57CR-843 Denso

WASHER KIT DENSO VFK Ø= 4mm x1.8mm, H=1.00-2.00mm, Pitch=0.05mm 21 size x 10 = 210 pcs







1.00 1.05 1.10 1.15 1.20 1.25 1.30 1.35 1.40 1.45 1.50 1.55 1.60 1.65

1.70 1.75 1.80 1.85 1.90 1.95 2.00





dieselland.ru | dieselland.biz | dieselland@mail.ru

Adjusting washers for CR DENSO injectors




DL70CR-DENSO

WASHER KIT Ø = 23 X 21 mm, H = 3.00-3.10 mm, Pitch = 0.01 mm, 11 sizes x 10 = 110 pcs

Adjusting washers for Common-Rail VDO (SIEMENS) PIEZO injectors











DL-400CR-VDO

ADJUSTING SET WASHER VDO (SIEMENS)

Ø ext.= 18 mm, Ø inside = 14 mm, H=0.9-1.13mm, Pitch = 0.01mm 24 sizes x 10 = 240 pcs. or 24 x 5 = 120 pcs

DL-410CR-VDO

ADJUSTING SET WASHER VDO (SIEMENS)

Ø ext.= 5.7 mm, Ø inside = 3 mm, H =1.00-2.00mm, Pitch = 0.05mm 24 sizes x 10 = 240 pcs. or 24 x 5 = 120 pcs



Adjusting washers and adjusting elements for CR DELPHI injectors



1,15	1,20	1,25	1,30	1,35	1,40
1,45	1,50	1,55	1,60	1,65	1,70
		100	- 25		1
	御		100	100	14 Ho
		-			



2,30	2,32	2,34	2,36	2,38	2,40	2,42
2,44	2,46	2,48	2,50	2,52	2,54	2,56
2,58	2,60	2,62	2,64			
-	-				-	-
112	たい	2,2062	2.8562 2.8562	and the second	THE O	
- 384 P	a Stati	C 2840				
	騎	4.35655 here	2.25453			
	-					_

DL-378CR-SMART E3

ADJUSTING SET WASHER DELPHI SMART E3 Ø ext.= 4.3 mm, \emptyset inside = 1.9 mm, H = 1.15-1.70 mm. Pitch = 0.05mm 12 sizes x 10 = 120 pcs. or 12 sizes x 5 = 60 pcs

DL-600CR-DELPHI

SET OF ADJUSTING ELEMENTS Ø = 2.0 mm,H = 2.30-2.64mm, Pitch = 0.02mm 18 sizes x 10 = 180 pcs.



2,66	2,68	2,70	2,72	2,74	2,76	2,78
2,80	2,82	2,84	2,86	2,88	2,90	2,92
2,94	2,96	2,98	3,00			
-	35	Q.R.	- 50	122		
		A CONTRACTOR	2.35			
A BRAN	S SEC	- Steel				No.
		15661	35653			

4,25 4,30

DL-601CR-DELPHI

SET OF ADJUSTING ELEMENTS Ø = 2.00 mm,H = 2.66 - 3.00 mm,Pitch = 0.02mm

18 sizes x 10 = 180 pcs



DL-602CR-DELPHI

SET OF ADJUSTING ELEMENTS

Ø = 2.0 mm,H = 3.75 - 4.30 mm, Pitch = 0.05mm 11 sizes x 10 = 110 pcs.



Adjusting washers and adjusting elements for CR DELPHI injectors



DL-603CR-DELPHI

SET OF ADJUSTING ELEMENTS $\emptyset = 2.00 \text{ mm},$ H=4.35-4.90mm, Pitch = 0.05mm 12 sizes x 10 = 110 pcs

Adjusting washers for Unit Injectors (UIS) and Single Pumps (PLD)





0.50 0.55 0.60 0.65 0.70

0.80

0.90

8.45 8.47 8.44 8.46 8.48 8.50 0.52

0.53 0.80

0.62 0.64 0.65

0.72 0.74 0.76 0.78 0.80

31g

0,75

1.00

DL-723UIS

ADJUSTING SET WASHER FOR UIS/UIP Ø outside= 7.3 mm, Ø inside= 3.0 mm, H=0.30-0.58mm, Pitch=0.02mm 15 sizes X 10 = 150 pcs. or 15 sizes x 5 = 75 pcs



ADJUSTING SET WASHER FOR UIS/UIP Ø outside= 7.3 mm, Ø inside= 3.0 mm, H=0.50-1.05mm, Pitch=0.05mm 12 sizes x 10 = 120 pcs. or 12 sizes x 5 = 60 pcs



ADJUSTING SET WASHER FOR UIS/UIP Ø outside= 9.3 mm, Ø inside= 4.7 mm, H=0.40-0.80mm, Pitch=0.02mm 21 sizes x 10 = 210 pcs. or 21 sizes x 5 = 105 pcs



-

Adjusting washers for Unit Injectors (UIS) and Single Pumps (PLD)



8,45	0.42		0,45	0,48	0.00	. W.D.E.
0.54	0.56	0.58	0.60	0,62	0,64	0,66
0,68	8,70	8,72	0,74	6,76	0,78	8,80
	10.51				15	
0	-	1	-	13	1	1
	1		6.0 (A)	100	1 10 100	



	2020	1722	See.	22.	322	1000	1000	
	0.64	0.66	0,61	8,77		1.74	171	
	0,71	4,80	0,62 5,84	1,00 7,00				
Contraction of the local division of the loc	1961	1991	1	21	T.		21	
	-12-	1 AL	影.	17.1	100	11	a faither	
	70	14	192	No.2	-	- Carlo	1	ļ
		-						1

DL-726UIS

ADJUSTING SET WASHER FOR UIS/UIP \emptyset outside= 8.3 mm, \emptyset inside= 4.7 mm, H=0.40-0.80mm, Pitch=0.02mm 21 sizes x 10 = 210 pcs. or 21 sizes x 5 = 105 pcs

DL-727UIS

ADJUSTING SET WASHER FOR UIS/UIP \emptyset outside= 5.0 mm, \emptyset inside= 2.5 mm, H =0.50-1.00 mm, Pitch = 0.02 mm 337 26 sizes x 10 = 260 pcs. or 26 sizes x 5 = 130 pcs

0



DL-728UIS

ADJUSTING SET WASHER FOR UIS/UIP Ø outside= 5.0 mm, Ø inside= 2.5 mm, H=0.50-1.05 mm, Pitch=0.05 mm12 sizes x 10 = 150 pcs. or 12 sizes x 5 = 60 pcs

0



DL-729UIS

ADJUSTING SET WASHER FOR UIS/UIP Ø outside= 4.3 mm, Ø inside= 1.9 mm, H=0.50-1.10mm, Pitch=0.05mm 12 sizes x 10 = 120 pcs. or 12 sizes x 5 = 60 pcs



Adjusting washers for Unit Injectors (UIS) and Single Pumps (PLD)




DL-730UIS

ADJUSTING SET WASHER FOR UIS/UIP Ø outside= 4.3 mm, Ø inside= 1.9 mm, H=1.10-1.50mm, Pitch=0.05mm 9 sizes x 10 = 90 pcs. or 9 sizes x 5 = 45 pcs



ADJUSTING SET WASHER FOR UIS/UIP Ø outside= 4.3 mm, Ø inside= 1.9 mm, H=1.15-1.70mm, Pitch=0.05mm 12 sizes x 10 = 120 pcs. or 12 sizes x 5 = 60 pcs

Tools and fixtures for grinding washers and other parts



D-261102

Plate (finishing) lapping Size: 200x200 mm

398



D-261106

Plate (finishing) lapping Size: 250x250 mm



D-261108

Plate (finishing) lapping Size: 400x400 mm



DL-UNI50270

Set of washer holders for grinding them The kit includes two holders with diameters for different pucks.

It is recommended to carry out grinding on a special lapping plate.







DL-TS800PL

Tachometer board



DL-PTC700PL

PTC device board



DL-FMDE800PL

Flow meter board FMDE



DL-CR500PL Cristina instrument board



DL-CRP600PL

Cristina-Piezo instrument board







DL-AC400PL Board from the Acoustic kit



DL-CAS1200PL CASCADE board



DL-CASP400PL Piezo board CASCADE



DL-RPC160PL

Time circuit board injector response



DL-SHT180PL

Printed circuit board curtain control measuring block





With our full range of products

CONTACTS:

DIESELLAND - GENERAL OFFICE

Dieselland OÜ | Tehnopargi tee 11, Tõrvandi 61715, Kambja vald, Estonia

Phone.: +372 505 2207

E-mail.: export@dieselland.eu, info@dieselland.eu